



SB1620DC SERIES

SURFACE SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 60 Volts **CURRENT** 16 Amperes

FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: TO-263/D²PAK molded plastic package
- Terminals: Lead solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Mounting Position: Any
- Weight: 0.0514 ounces, 1.46 grams.

TO-263 / D²PAK

Unit : inch(mm)

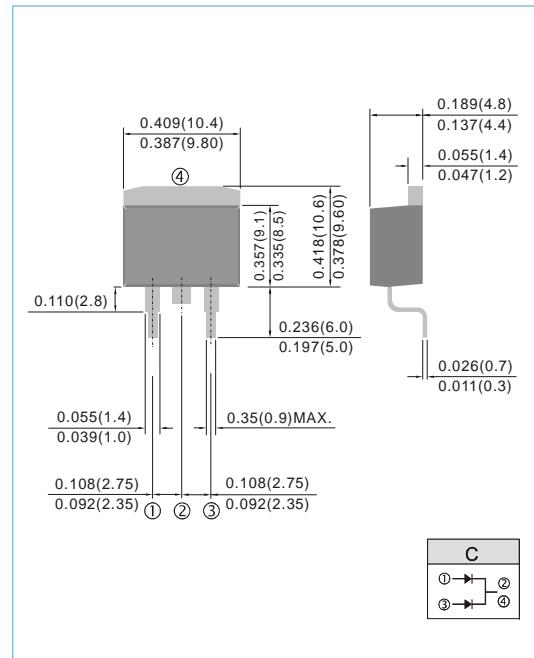

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.


PARAMETER	SYMBOL	SB1620DC	SB1630DC	SB1640DC	SB1650DC	SB1660DC	UNITS		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	V		
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	V		
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	V		
Maximum Average Forward Current lead length at $T_c = 75^\circ C$	$I_{F(AV)}$	16					A		
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150					A		
Maximum Forward Voltage at 8.0A per leg	V_F	0.55		0.75		V			
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_j = 25^\circ C$ $T_j = 100^\circ C$	I_R	0.2 50					mA		
Typical Thermal Resistance	$R_{\theta JC}$	2.0					°C / W		
Operating Junction Temperature Range	T_J	-55 to +125	-55 to +150			°C			
Storage Temperature Range	T_{STG}	-55 to +150					°C		



SB1620DC SERIES

RATING AND CHARACTERISTIC CURVES


AVERAGE FORWARD CURRENT

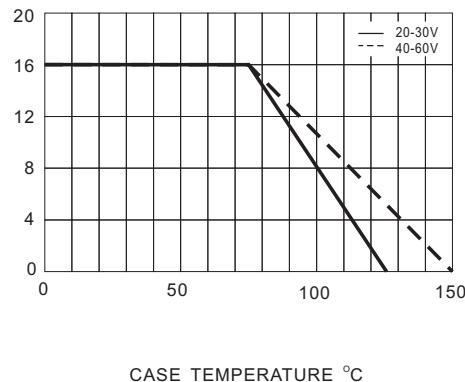

CASE TEMPERATURE °C

Fig.1- FORWARD CURRENT DERATING CURVE


PEAK FORWARD SURGE CURRENT
AMPERES

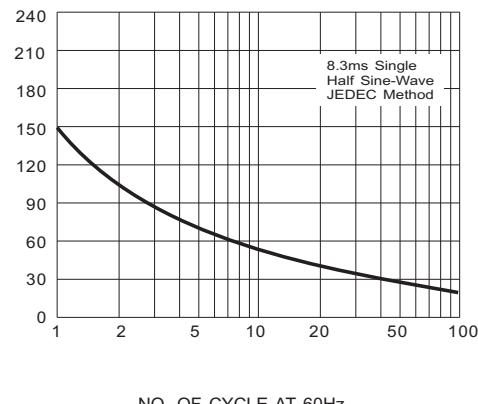

NO. OF CYCLE AT 60Hz

Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT


INSTANTANEOUS REVERSE CURRENT, mA

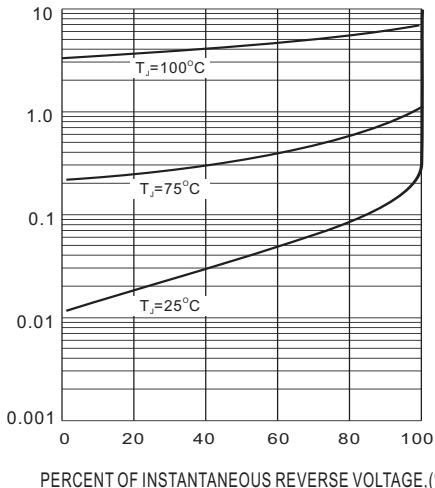

PERCENT OF INSTANTANEOUS REVERSE VOLTAGE,(%)

Fig.3- TYPICAL REVERSE CHARACTERISTIC

INSTANTANEOUS FORWARD CURRENT
AMPERES

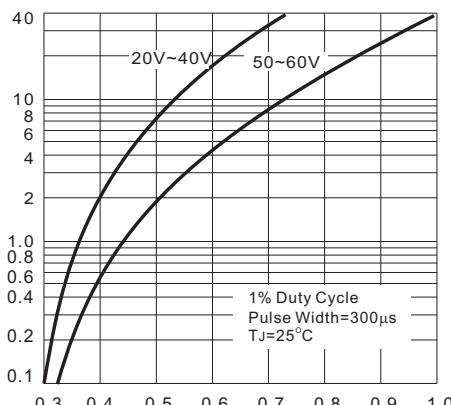

INSTANTANEOUS FORWARD VOLTAGE ,VOLTS

Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC