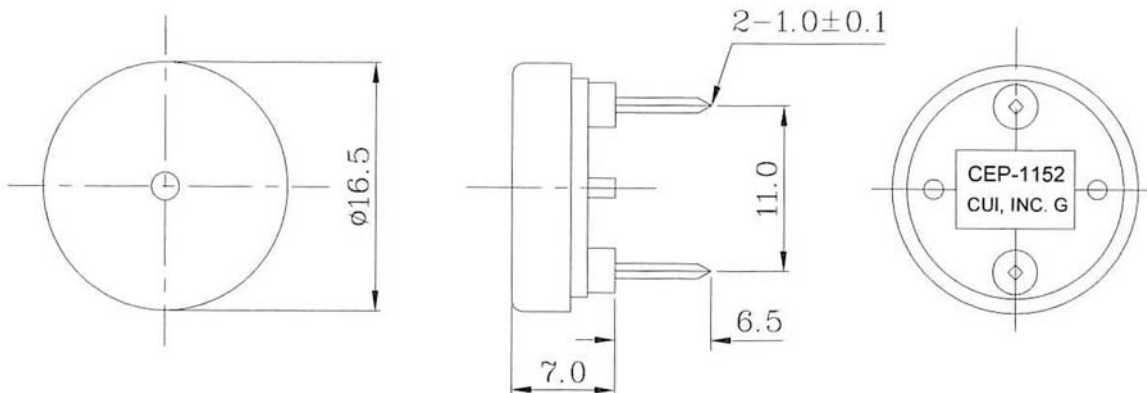




**Specifications**

|                        |                            |  |
|------------------------|----------------------------|--|
| Operating voltage      | 30 Vp-p max.               |  |
| Current consumption    | 9 mA max.                  | at 10 Vp-p, square wave, 5.0 KHz         |
| Sound pressure level   | 84 db min.                 | at 10 cm / 10 Vp-p, square wave, 5.0 KHz |
| Electrostatic capacity | 11,000 pF $\pm$ 30%        | at 1KHz / 1 V                            |
| Operating temperature  | -30 ~ +85° C               |  |
| Storage temperature    | -40 ~ +95° C               |  |
| Dimensions             | $\phi$ 16.5 x H7.0 mm      |  |
| Weight                 | 1.0 g max.                 |  |
| Material               | ABS UL-94 1/16" HB (Black) |  |
| Terminal               | Pin type (Sn Plating)      |  |
| RoHS                   | yes                        |  |

**Appearance Drawing**

 Tolerance:  $\pm$ 0.5


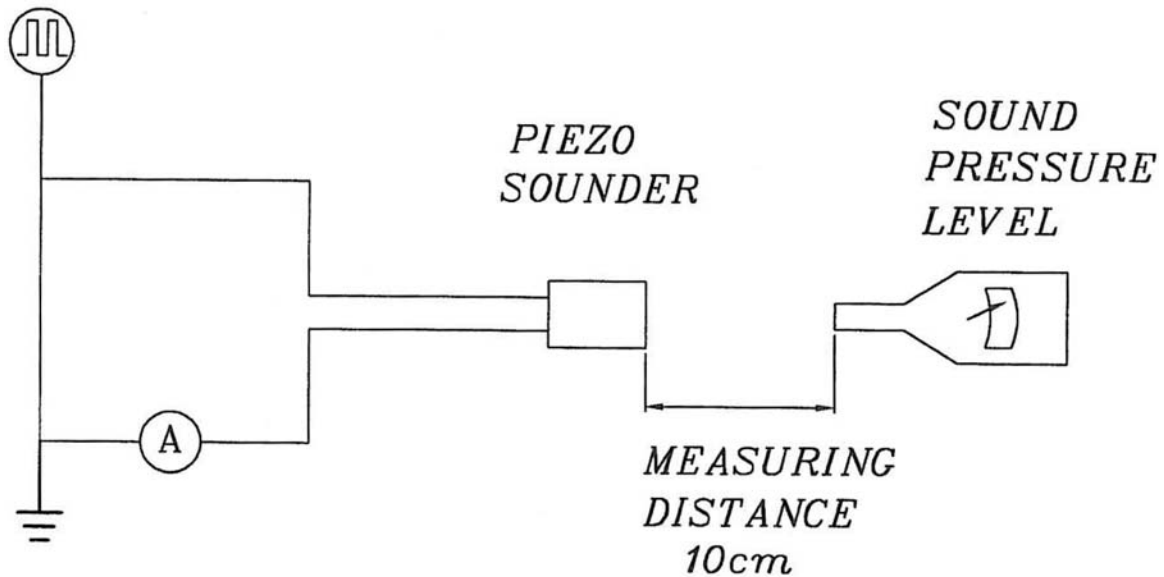
### Typical Frequency Response Curve

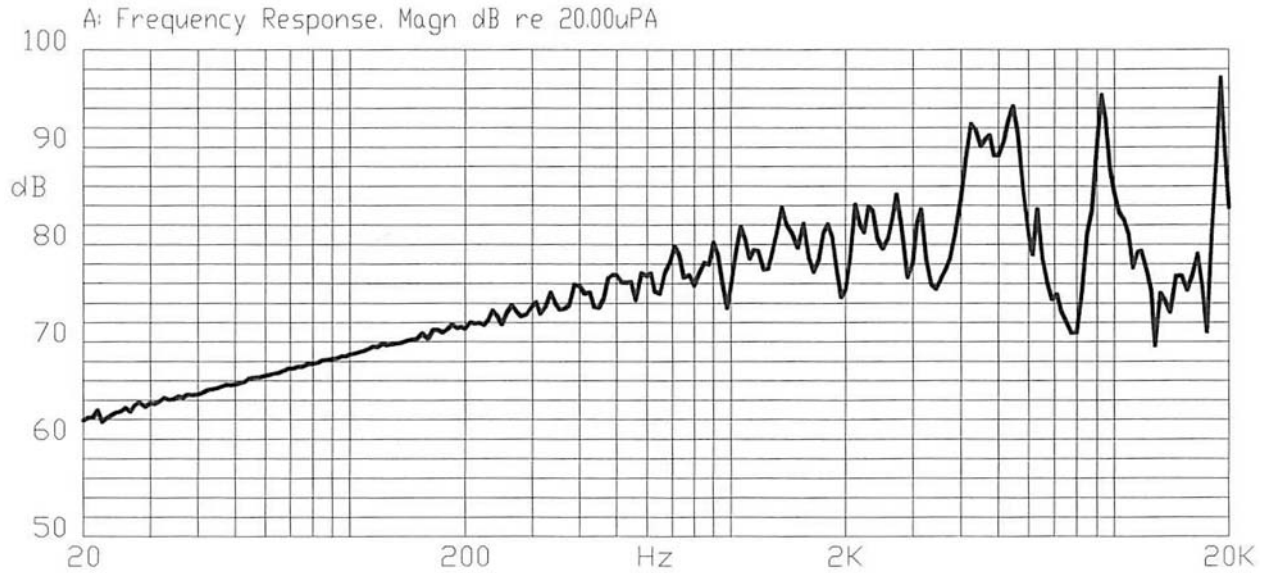

### Measurement Method

S.P.L. Measuring Circuit

Input Signal: 10Vp-p, 5.0kHz, Square Wave



Mic : RION S.P.L meter UC30 or equivalent


S.G : Hewlett Packard 33120A Function Generator or equivalent

### Mechanical Characteristics

| Item                         | Test Condition  | Evaluation Standard  |
|------------------------------|---|--|
| Solderability                | Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $270 \pm 5^\circ\text{C}$ for $3 \pm 1$ seconds.   | 90% min. of the lead terminals will be wet with solder. (Except the edge of the terminal)  |
| Soldering Heat Resistance    | Lead terminals are immersed up to 1.5mm from buzzer's body in solder bath of $300 \pm 5^\circ\text{C}$ or $260 \pm 5^\circ\text{C}$ for $10 \pm 1$ seconds.                     | No interference in operation.  |
| Terminal Mechanical Strength | For 10 seconds, the force of 9.8N (1.0kg) is applied to each terminal in axial direction.   | No damage or cutting off.  |
| Vibration                    | The buzzer shall be measured after applying a vibration amplitude of 1.5 mm with 10 to 55 Hz band of vibration frequency to each of the 3 perpendicular directions for 2 hours. | The value of oscillation frequency/current consumption should be $\pm 10\%$ of the initial measurements. The SPL should be within $\pm 10\text{dB}$ compared with the initial measurement. |
| Drop Test                    | The part will be dropped from a height of 75 cm onto a 40 mm thick wooden board 3 times in 3 axes (X, Y, Z) for a total of 9 drops.   |  |

### Environment Test

| Item             | Test Condition   | Evaluation Standard   |
|------------------|--|---|
| High temp. test  | After being placed in a chamber at $+95^\circ\text{C}$ for 240 hours.                                    | The buzzer will be measured after being placed at $+25^\circ\text{C}$ for 4 hours. The value of the oscillation frequency/current consumption should be $\pm 10\%$ compared to the initial measurements. The SPL should be within $\pm 10\text{dB}$ compared to the initial measurements. |
| Low temp. test   | After being placed in a chamber at $-40^\circ\text{C}$ for 240 hours.                                    |   |
| Humidity test    | After being placed in a chamber at $+40^\circ\text{C}$ and $90 \pm 5\%$ relative humidity for 240 hours. |   |
| Temp. cycle test | The part shall be subjected to 5 cycles. One cycle will consist of:                                      |   |

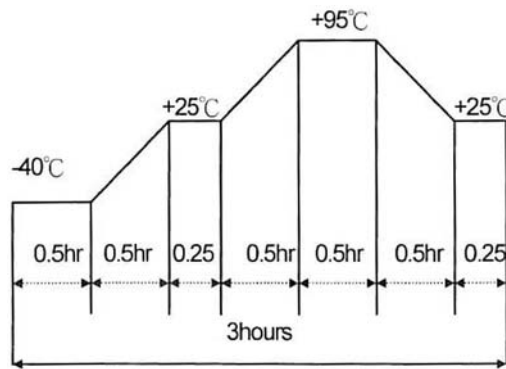



**Reliability Test**



| <b>Item</b>           | <b>Test Condition</b>   | <b>Evaluation Standard</b>  |
|-----------------------|---|---|
| Operating (Life Test) | 1. Continuous life test:<br>The part will be subjected to 48 hours of continuous operation at +70°C with rated voltage applied.<br><br>2. Intermittent life test:<br>A duty cycle of 1 minute on, 1 minutes off, a minimum of 5,000 times at room temp (+25 ±2°C) with rated voltage applied. | The buzzer will be measured after being placed at +25°C for 4 hours. The value of the oscillation frequency/current consumption should be ±10% compared to the initial measurements. The SPL should be within ±10dB compared to the initial measurements. |

**Test Conditions**

|                          |                            |                       |                            |
|--------------------------|----------------------------|-----------------------|----------------------------|
| Standard Test Condition  | a) Temperature: +5 ~ +35°C | b) Humidity: 45 - 85% | c) Pressure: 860-1060 mbar |
| Judgement Test Condition | a) Temperature: +25 ±2°C   | b) Humidity: 60 - 70% | c) Pressure: 860-1060 mbar |



**Packaging**

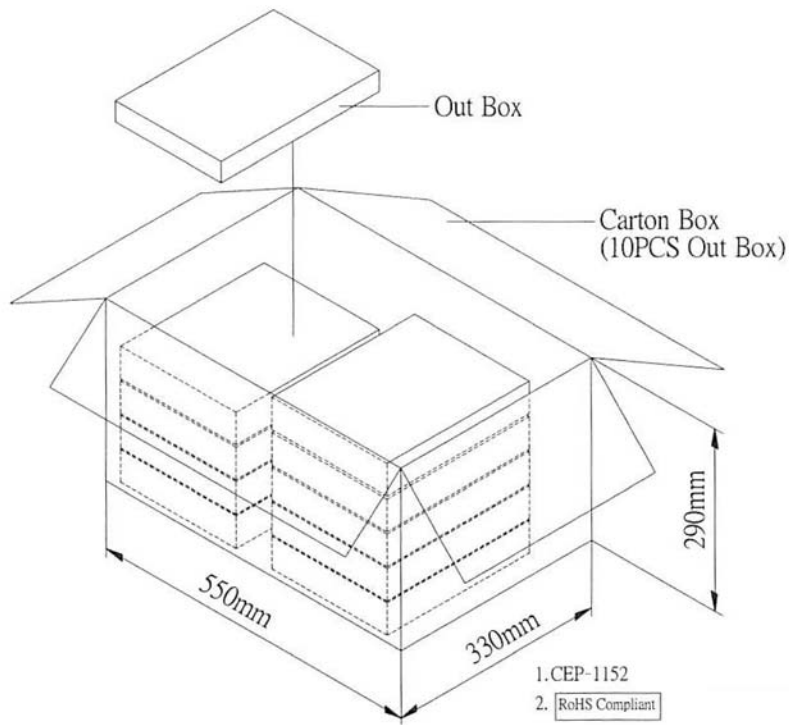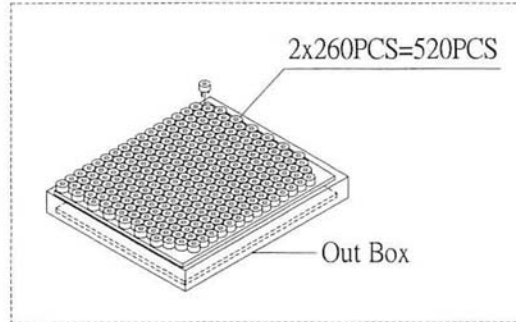

|            |                   |                    |
|------------|-------------------|--------------------|
| Out Box    | 310mmx248mmx49mm  | 2x260PCS=520PCS    |
| Carton Box | 550mmx330mmx290mm | 520PCSx10=5,200PCS |