

Type: CMS65

◆ **Product Description**


- 6.2×6.2mm Max.(L×W), 6.1mm Max. Height.
- Max. Operating frequency 500kHz;
Max Operating Power 1.5W (500kHz), 0.91W(300kHz), 0.30W(100kHz)
- Custom design is available.




◆ **Feature**

- Magnetically shielded construction.
- Ideally used in Bias OSC for Tape Recorder, can be also used as power chokes, Hybrid-IC inductors.
- RoHS Compliance.

◆ **Dimensions (mm)**

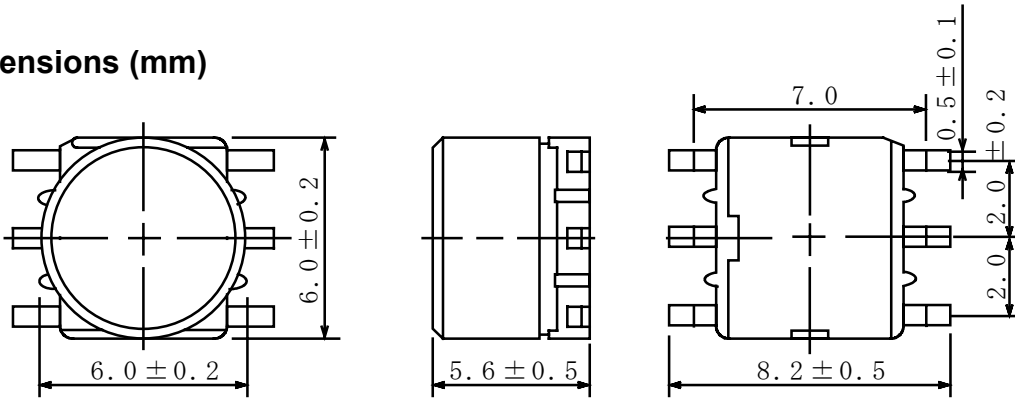


◆ **Schematics (Bottom)**



“ S ” is winding start.

◆ **Land Pattern (mm)**

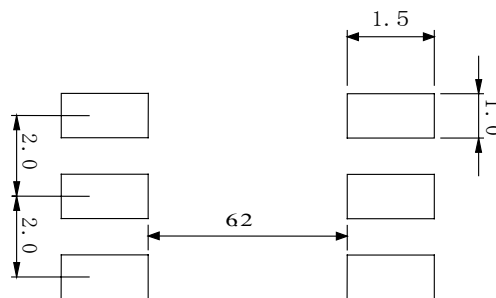

◆ **Specification**

Sample No.	Inductance (3-4) 1kHz/1V	D.C.R. (3-4)
6324-T061	76μH±30%	0.59 Ω Max