



# PJGL05 SERIES

## ULTRA LOW CAPACITANCE SINGLE TVS FOR HIGH SPEED DATA LINES

This Transient Voltage Suppressor is intended to Protect Sensitive Equipment against Electrostatic Discharge and Transient Events as well to offer a Minimum insertion loss in high speed data communication transmission line ports used in Portable Consumer, Computing and Networking Applications.

**VOLTAGE** 5~24 Volts    **POWER** 400Watts    **SOT-23**    Unit: inch ( mm )

### FEATURES


- Working Peak Reverse Voltage Range-5,12,15 and 24V
- Maximum Leakage Current of 5μA
- IEC61000-4-2 Compliance 15kV Air,8kV Contact Discharge
- IEC61000-4-5 17 Amps peak, 8x20μsec Waveform
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: SOT23, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Weight: approximately 0.008gram

### APPLICATIONS

- Mobile Phones and accessories
- Universal Serial Bus (USB1.1 and 2.0) Applications
- Portable Consumer Electronics
- Instrumentation Equipment
- Ethernet 10,100 and 1000 Base Port Protection

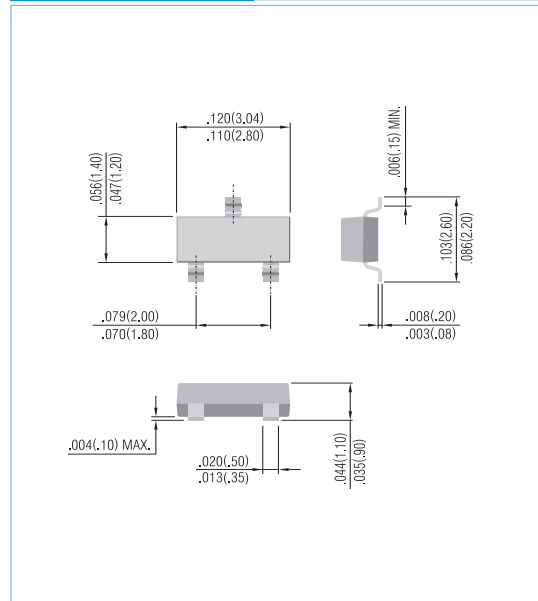

### MAXIMUM RATINGS

Rating	Symbol	Value	Units
Peak Pulse Power (8x20 μs Waveform)	P <sub>PP</sub>	400	W
Peak Pulse Current (8x20 μs Waveform)	I <sub>PP</sub>	17	A
ESD Voltage (HBM)	V <sub>ESD</sub>	>25	kV
Lead Soldering Temperature (max 10 secs)	T <sub>L</sub>	260	°C
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C




Fig.59



## PJGL05 SERIES

### ELECTRICAL CHARACTERISTICS (T<sub>J</sub>=25°C)





PJGL05 Marking GL5						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V <sub>WRM</sub>		-	-	5	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>BR</sub> =1mA	6	-	-	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	20	μA
Clamping Voltage (8/20μs)	V <sub>CL</sub>	I <sub>PP</sub> =1Amps	-	-	9.5	V
Clamping Voltage (8/20μs)	V <sub>CL</sub>	I <sub>PP</sub> =5Amps	-	-	11	V
Off State Junction Capacitance	C <sub>J</sub>	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF
PJGL12 Marking G12						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V <sub>WRM</sub>		-	-	12	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>BR</sub> =1mA	13.3	-	-	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> =12V	-	-	1	μA
Clamping Voltage (8/20μs)	V <sub>CL</sub>	I <sub>PP</sub> =1Amps	-	-	19	V
Clamping Voltage (8/20μs)	V <sub>CL</sub>	I <sub>PP</sub> =5Amps	-	-	24	V
Off State Junction Capacitance	C <sub>J</sub>	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF
PJGL15 Marking G15						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V <sub>WRM</sub>		-	-	15	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>BR</sub> =1mA	16.7	-	-	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> =15V	-	-	1	μA
Clamping Voltage (8/20μs)	V <sub>CL</sub>	I <sub>PP</sub> =1Amps	-	-	24	V
Clamping Voltage (8/20μs)	V <sub>CL</sub>	I <sub>PP</sub> =5Amps	-	-	30	V
Off State Junction Capacitance	C <sub>J</sub>	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF



# PJGL05 SERIES

PJGL24 Marking G24						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	$V_{WRM}$		-	-	24	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BR}=1mA$	26.7	-	-	V
Reverse Leakage Current	$I_R$	$V_R=24V$	-	-	1	$\mu A$
Clamping Voltage (8/20 $\mu s$ )	$V_{CL}$	$I_{PP}=1Amps$	-	-	43	V
Clamping Voltage (8/20 $\mu s$ )	$V_{CL}$	$I_{PP}=5Amps$	-	-	55	V
Off State Junction Capacitance	$C_J$	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF


## TYPICAL CHARACTERISTIC CURVES

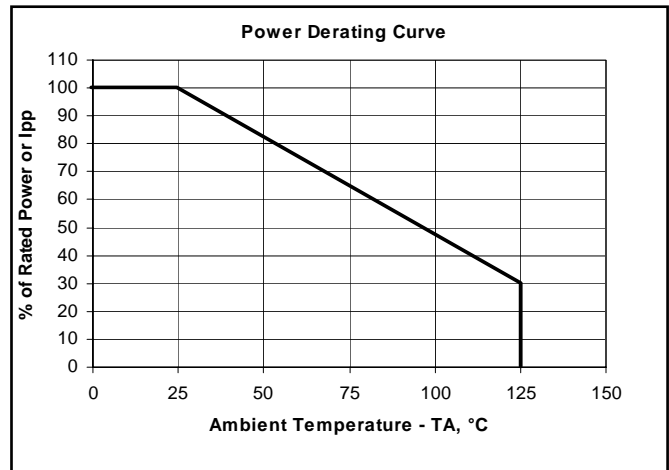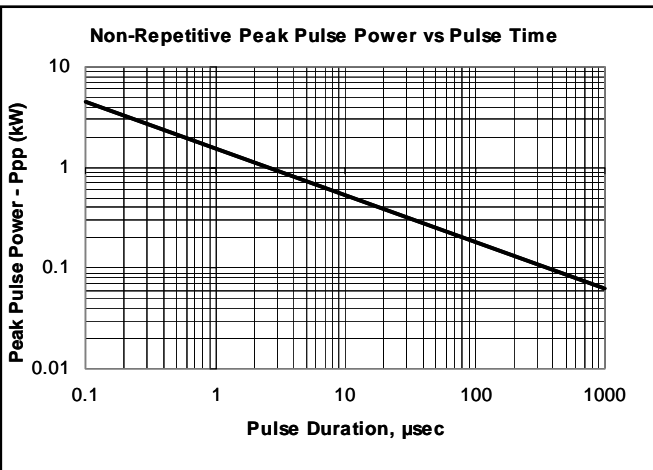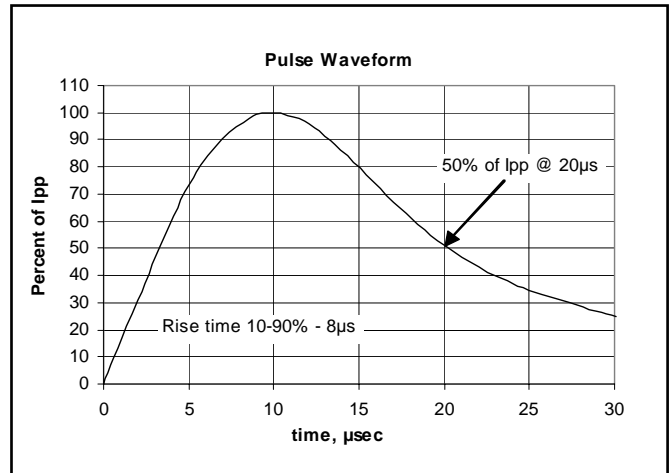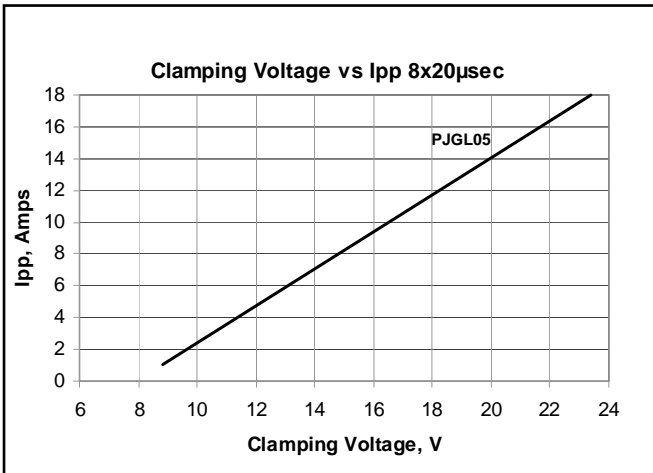



# PJGL05 SERIES

## MOUNTING PAD LAYOUT

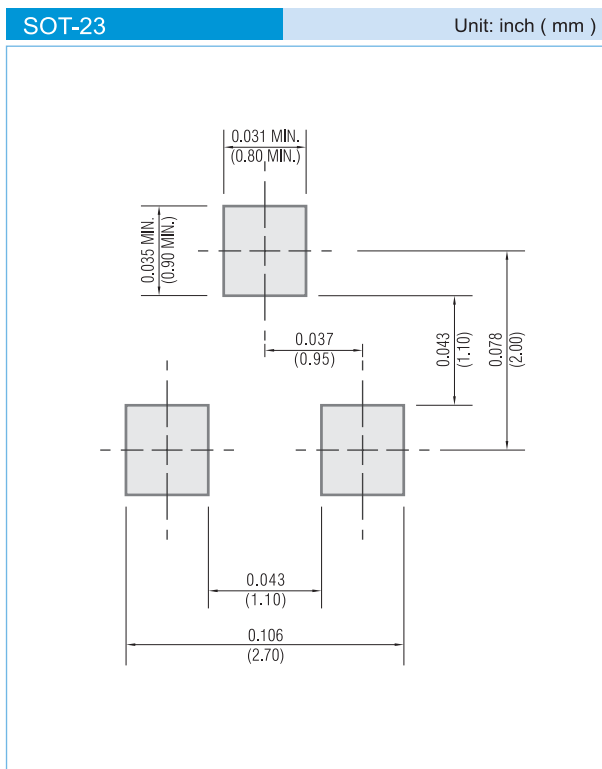

## ORDER INFORMATION

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.