


2.0mm DUAL ROW SOCKET P.C.B.MOUNT

(3.8mm PLASTIC HEIGHT)

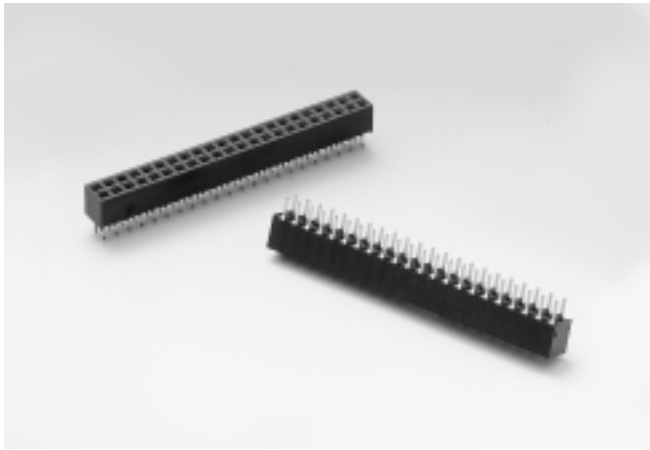


200136FS Series

Mates With SUYIN 200109,200112,200114,200115,200117,200121,200194 Series

Specifications:

- 4-80 Circuits
- Insulator Material : Black High Temp.Plastic
- Max Processing Temp. : -40°C to +105°C
- Terminal Material : Pho.bronze
- Plating : Contact-Selective Gold Plated
or Full Gold Plated
- Max. Current Rating : 1.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 Seconds)

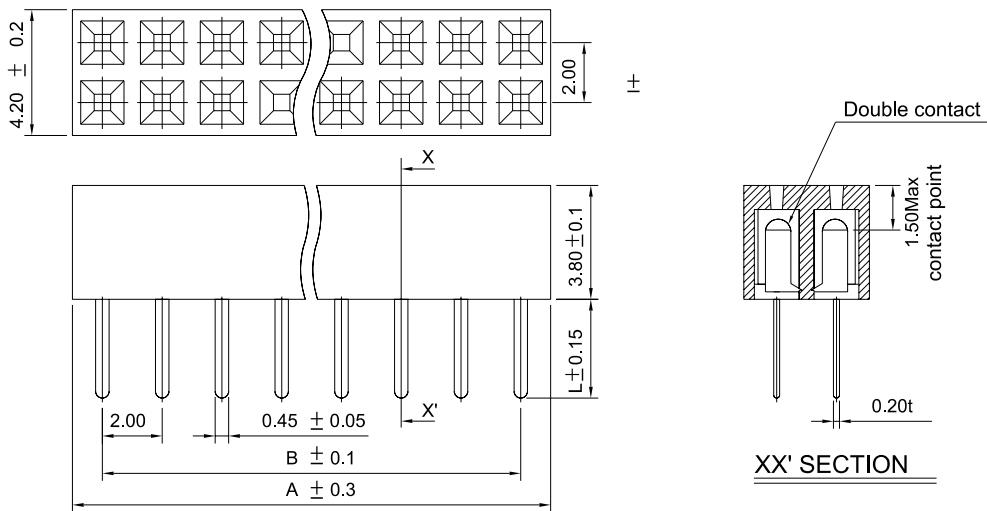

Order Information

200136FS□□□□□□ZU
1 2 3 6 4 5

1. 'S' : Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package
'U' : Tube Package Without CAP
6. Pin Length.

SUYIN P/NO.	DIM.L
200136FS□□□□□00ZU	3.3
200136FS□□□□□03ZU	2.0
200136FS□□□□□01ZU	1.5

Reference Page 11

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200136FS004□□00ZU	4.0	2.0	200136FS036□□00ZU	36.0	34.0
200136FS006□□00ZU	6.0	4.0	200136FS040□□00ZU	40.0	38.0
200136FS008□□00ZU	8.0	6.0	200136FS044□□00ZU	44.0	42.0
200136FS010□□00ZU	10.0	8.0	200136FS046□□00ZU	46.0	44.0
200136FS012□□00ZU	12.0	10.0	200136FS050□□00ZU	50.0	48.0
200136FS014□□00ZU	14.0	12.0	200136FS052□□00ZU	52.0	50.0
200136FS016□□00ZU	16.0	14.0	200136FS056□□00ZU	56.0	54.0
200136FS018□□00ZU	18.0	16.0	200136FS060□□00ZU	60.0	58.0
200136FS020□□00ZU	20.0	18.0	200136FS062□□00ZU	62.0	60.0
200136FS024□□00ZU	24.0	22.0	200136FS064□□00ZU	64.0	62.0
200136FS026□□00ZU	26.0	24.0	200136FS068□□00ZU	68.0	66.0
200136FS030□□00ZU	30.0	28.0	200136FS070□□00ZU	70.0	68.0
200136FS034□□00ZU	34.0	32.0	200136FS080□□00ZU	80.0	78.0

Recommended P.C.B Layout

