
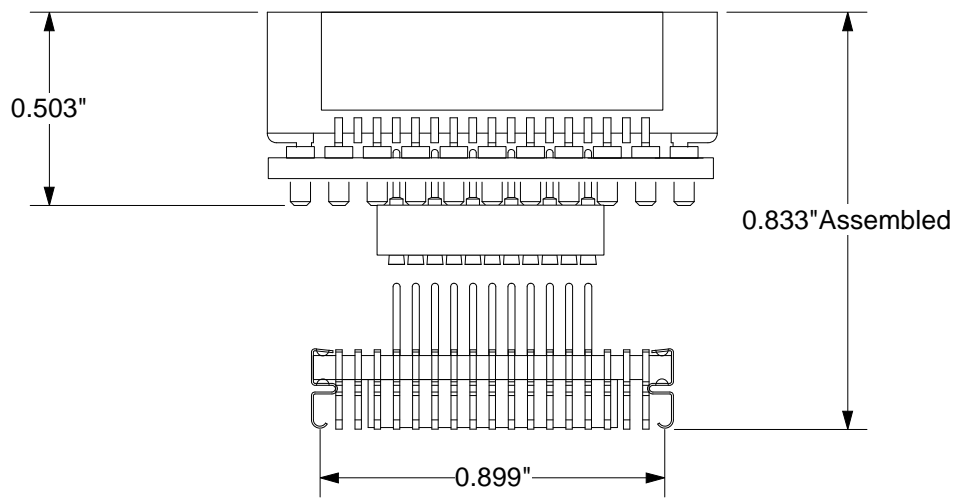


Carrier Adaptor (CA): 52 position PLCC Production socket with test points to 52 position PLCC J leaded SM foot. 2 pc. adaptor.

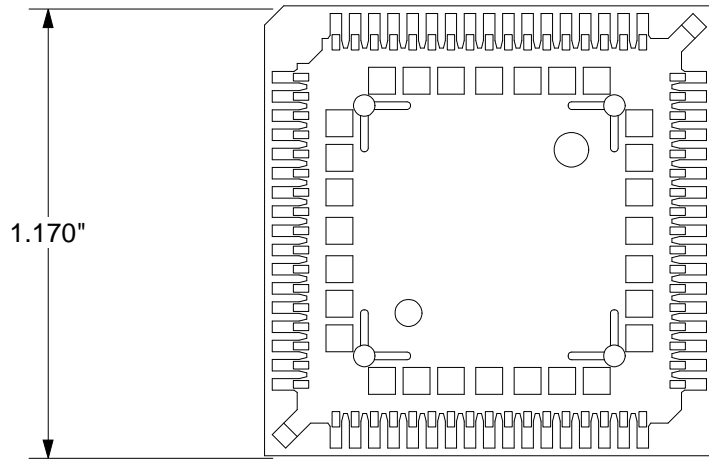


-J (Surface-mountable j leaded foot) option

Substrate: FR4/G10, 0.0625"±0.007" thick.

PLCC Socket Pins: Phosphor Bronze, finish: 150 μ" Tin/lead (93/7) over 40μ" Nickel

Base Pins: Brass Alloy 360, 1/2H ; finish: 10μ" Gold over 100/150μ" Nickel

<b>CA-PLCC052-D-J Drawing</b>		Status: Released	Scale: 2:1	Rev: A
 <p>© 1996 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing: E. Swanson		Date: 10/10/96	
	File: CA-PLCC52-D-J-01 Dwg			Modified: