

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0923181009

Status:

Active

Overview:

[picoflex](#)

Description:

Picoflex® PF-50 IDT-Board In Z-Style, 10 Circuits, 0.09m (3.54") Length

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-99020-0011 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family

Cable Assemblies

Series

92318

Connector to Connector

Picoflex® PCB-to-IDT

Overview

[picoflex](#)

Product Name

Picoflex®

Physical

Cable Length

0.09m (3.54")

Circuits (Loaded)

10

Color - Resin

Natural

Gender

Female-Female

Lock to Mating Part

None

Material - Metal

Phosphor Bronze

Material - Plating Mating

Tin

Material - Plating Termination

Tin

Material - Resin

Polyester

Packaging Type

Bag

Pitch - Mating Interface (in)

0.050 In

Pitch - Mating Interface (mm)

1.27 mm

Plating min: Mating (µin)

80.00

Plating min: Mating (µm)

2.000

Plating min: Termination (µin)

80.00

Plating min: Termination (µm)

2.00

Single Ended

No

Termination Interface: Style

IDT or Pierce, Through Hole - Kinked Pin

Waterproof / Dustproof

No

Wire Insulation Diameter

N/A

Wire Size AWG

28

Wire/Cable Type

PVC, Ribbon Cable

Electrical

Current - Maximum per Contact

1.2A

Voltage - Maximum

250V

Material Info


Reference - Drawing Numbers

Product Specification

PS-99020-0011

Sales Drawing

SD-92318-001

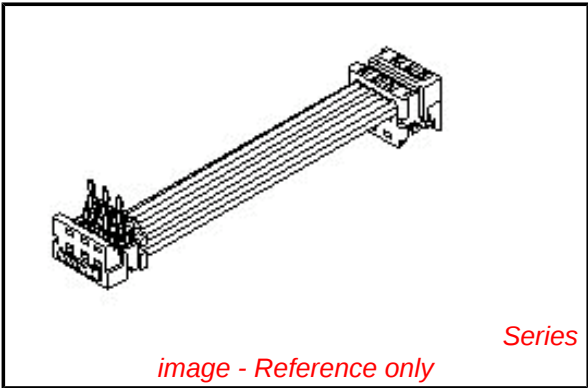

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series



92318Series

Mates With

Picoflex® PF-50 Header [90325](#) , [90800](#) , [90779](#) , [90715](#) , [90814](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

PART NO. SEE CHART
Dwg. NO. SD-92318-001

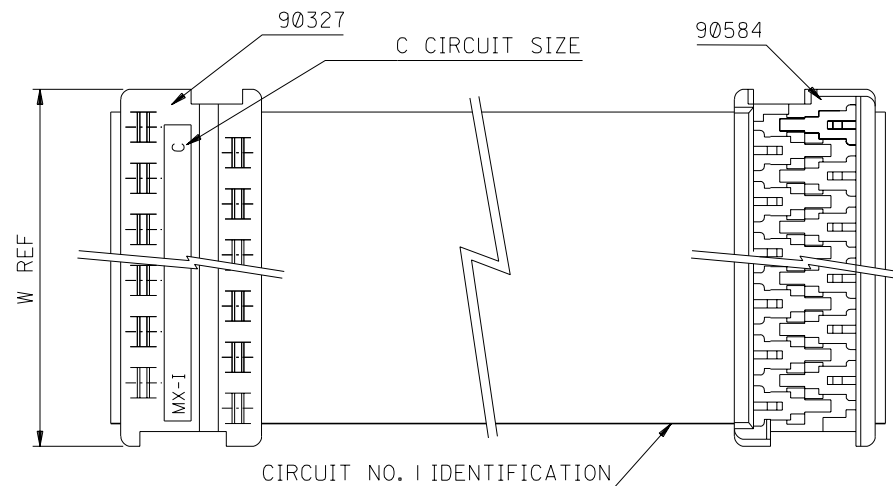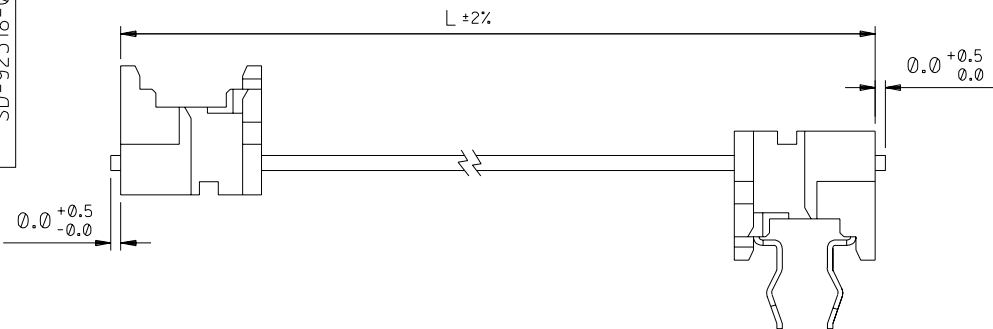

ORDERING INFORMATION

92318-****

CIRCUIT SIZE
LENGTH L IN CENTIMETRES

LENGTHS AVAILABLE FROM 6 CM TO 120 CM

e.g. 92318-1208 = 12 CIRCUIT
WITH LENGTH L OF 8 CM.

NOTE : FOR LENGTHS OF
100 CM , THE PART NO. IS 92318-***01
105 CM , THE PART NO. IS 92318-***02
110 CM , THE PART NO. IS 92318-***03
115 CM , THE PART NO. IS 92318-***04
120 CM , THE PART NO. IS 92318-***05

90327 CONNECTOR

CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

90584 CONNECTOR

CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

CABLE DETAILS:

28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
INDICATING CIRCUIT NO. 1 , UL 2651.

NOTES:

1. SEE PRODUCT SPECIFICATIONS PS-99020-0011.
2. SEE TERMINATION SPECIFICATION ES-99033-0001.
3. SEE TERMINATION SPECIFICATION ES-99033-0002.
4. SEE CABLE SPECIFICATION ES-99027-0006.
5. HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR SHORTS AND DISCONTINUITIES.

REF DIM ADDED EC NO. 2003-0499 DRAWN: P.FINN 02/11/13 CHK: / / APP: / /	QUALITY SYMBOLS MAJOR CRITICAL	DESCRIPTION REV	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 4 : 1	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm ☐ INCH ☒ mm ONLY		SHT	REV	
			4 PLACES ±0.	±.	DRAWN BY & DATE MCURRAN 98/06/24			TITLE: PICO FLEX IDT TO BOARD-IN STANDARD ASSEMBLIES (Z-STYLE)		MATERIAL NO. SEE CHART	DRAWING NO. SD-92318-001	SHEET NO. 1 OF 1
			3 PLACES ±0.	±.	CHECKED BY & DATE AMCANN 98/06/24							
			2 PLACES ±0.	±.	APPROVED BY & DATE MWILHITE 98/06/24							
1 PLACE ±0.		±.	ANGULAR: ± 1/2 °		CAD FILENAME		MATERIAL NO. SEE CHART		DRAWING NO. SD-92318-001		SHEET NO. 1 OF 1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.									SIZE B