

FST10120 to FST10150

Dual Schottky Barrier Rectifiers


PRV : 120 - 150 Volts
I_o : 10 Ampere

FEATURES :

- * Guard ring for reverse protection
- * Low power loss
- * High efficiency
- * High surge capacity
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : JEDEC TO-220AB molded plastic body
- * Terminals: Plated leads, solderable per MIL-STD-750 Method 2026
- * Polarity: As marked
- * Mounting Position: Any
- * Weight : 2.24 grams (Approximately)

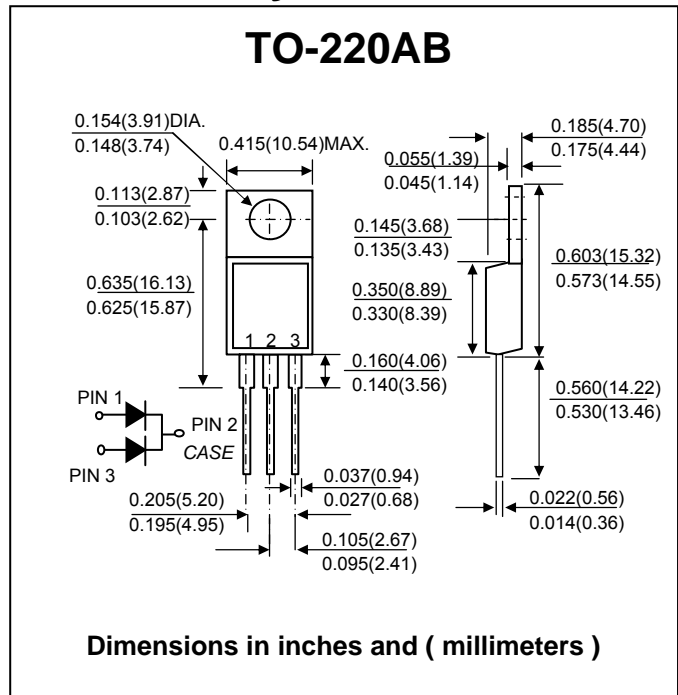

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_a = 25°C unless otherwise noted.)

PARAMETER	SYMBOL	FST10120	FST10130	FST10150	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	120	130	150	V
Maximum Average Forward Rectified Current at T _C = 162 °C	I _{F(AV)}	Total device			A
		Per Leg			
Maximum Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load Per Leg	I _{FSM}	200			A
Maximum Instantaneous Forward Voltage Per Leg ⁽¹⁾	V _F	at I _F = 5 A, T _J = 25 °C			V
		I _F = 5 A, T _J = 125 °C			
Maximum Reverse Current Per Leg at Working Peak Reverse Voltage ⁽¹⁾	I _R	T _J = 25 °C			μA
	I _{R(H)}	T _J = 125 °C			μA
Typical Junction Capacitance (V _R = 5 V, T _J = 25 °C)	C _J	180			pF
Typical Thermal Resistance, Junction to Case, Per Leg	R _{θJC}	3.6			°C/W
Operating Junction Temperature Range	T _J	- 55 to + 175			°C
Storage Temperature Range	T _{STG}	- 55 to + 175			°C

Note :

(1) Pulse Test: Pulse Width 300 μs, Duty Cycle 2% .

RATING AND CHARACTERISTIC CURVES (FST10120~ FST10150)

FIG.1 - FORWARD CURRENT DERATING PER LEG

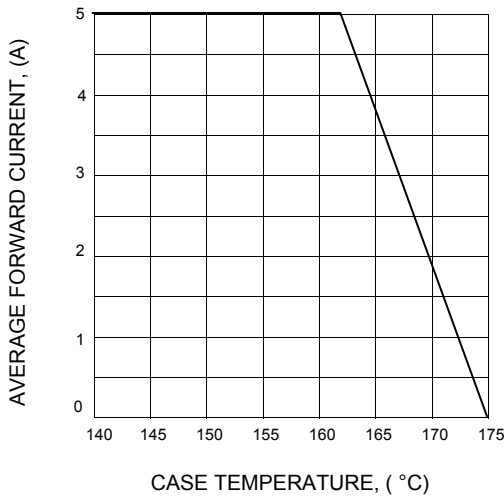


FIG.2 - TYPICAL JUNCTION CAPACITANCE PER LEG

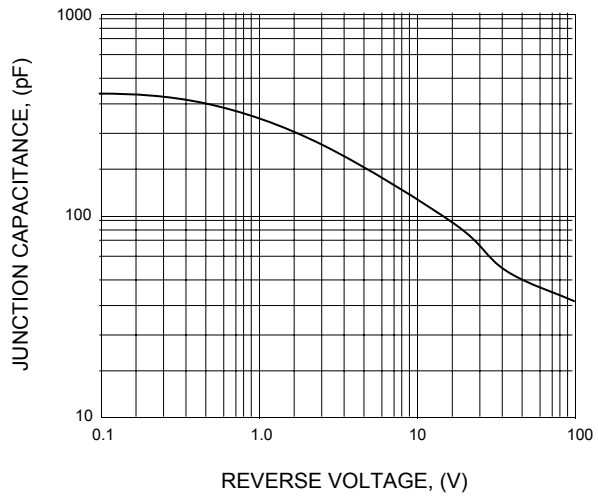


FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER LEG

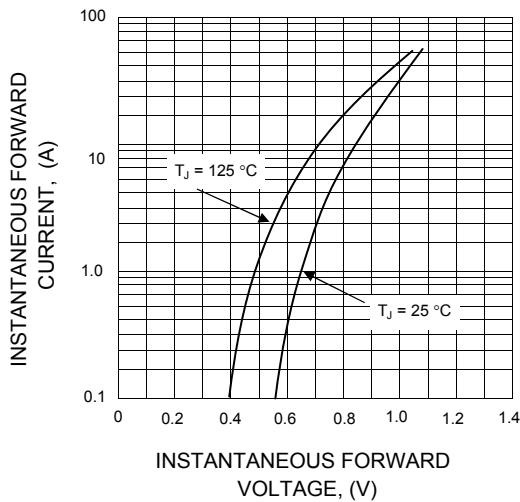


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

