




MM-1244 SERIES

The filter is designed to operate in high current applications of 48 Vdc telecommunication systems. The compact size makes it easy to fit into systems with limited space allocations. Our standard construction is more than adequate for most installation environments.



Should your application require operation in a more severe environment, JMK's engineering staff can Easily modify the mechanical construction to meet the most severe design criteria.

Order p/n: MM-1244-60 = 60 amp
MM-1244-85 = 85 amp

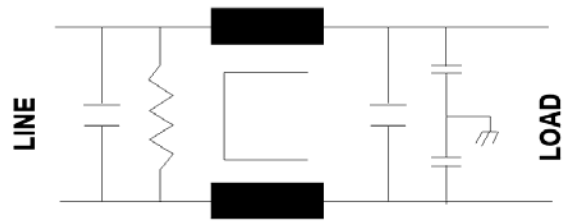

Operating Voltage = 48 Vdc
 Operating Current (Max) = 60, 85 Amp
 Temperature Range(Storage) = -55 TO 85 C
 Temperature Range(Operating) = -20 TO 50 C
 Diel. Withstanding Voltage (Term - Case) = 1500 Vdc
 Diel. Withstanding Voltage (+ to -) = 707 Vdc

Approvals: UL, CSA- NRTL, TUV

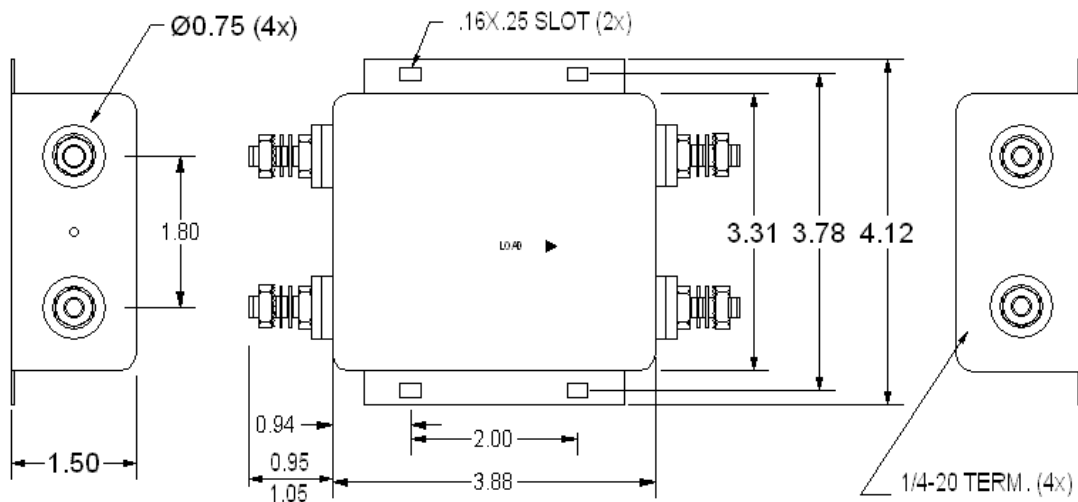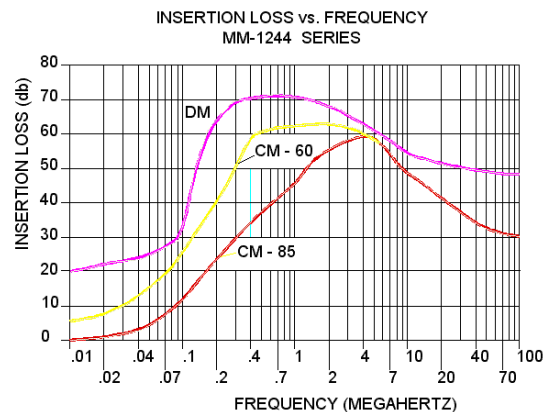

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884