


Recommended P.C.B Layout

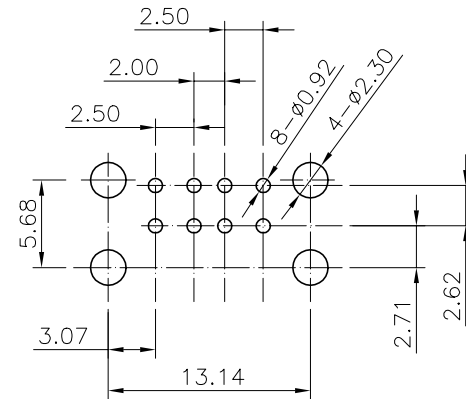

NOTE:  
2547A-08□□□-A  
1

- 1. Selective plated
- G1T-05u" Min. gold in contact area/  
100u" Min. Tin in soldr area.
- G2T-Gold flash in contact area/  
100u" Min. Tin in soldr area.
- G3T-10u" Min. gold in contact area/  
100u" Min. Tin in soldr area.
- G4T-15u" Min. gold in contact area/  
100u" Min. Tin in soldr area.
- G5T-30u" Min. gold in contact area/  
100u" Min. Tin in soldr area.
- G6T-50u" Min. gold in contact area/  
100u" Min. Tin in soldr area.

5	Shell	C2680	—	Ni Plated
4	Shell	C2680	—	Ni Plated
3	Shell	C2680	—	Ni Plated
2	Tetminal	C6280	—	Gold Plated
1	Plastic	NY-6T	Black	UL94V-9
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

**SUYIN**  
CONNECTOR

CUSTOMER COPY	TITLE:	USB Series A,R/A Dual Port Dip Type		
PART NO.	2547A-08GXT-A			
PART NO. (OLD)	—			
DRAWING NO.	D	2547A-08GXT-A		
SCALE	2:1	UNIT	mm	A4

Angle	±2°	DRAW			
30 ~	±0.50	DESIGN			
10 ~ 30	±0.30	CHECK			
~ 10	±0.15	APPRO.			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED					
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
0			New		