



FLASH-ROM MODULE 16MByte (8M x 16-Bit) , SMM 80Pin
Part No. HMF8M16F8VS

GENERAL DESCRIPTION

The HMF8M16F8VS is a high-speed flash read only memory (FROM) module containing 8,388,608 words organized in an x16bit configuration. The module consists of eight 2M x 8 FROM mounted on a 80-pin, MMC connector FR4-printed circuit board. Commands are written to the command register using standard microprocessor write timings.

Register contents serve as input to an internal state-machine, which controls the erase and programming circuitry. Write cycles also internally latch addresses and data needed for the programming and erase operations. Reading data out of the device is similar to reading from 12.0V flash or EPROM devices.

Output enable (/OE) and write enable (/WE) can set the memory input and output. The host system can detect a program or erase operation is complete by observing the Ready Pin, or reading the DQ7(Data # Polling) and DQ6(Toggle) status bits. When FROM module is disable condition the module is becoming power standby mode, system designer can get low-power design. All module components may be powered from a single +3V DC power supply and all inputs and outputs are LVTTTL-compatible.

PIN ASSIGNMENT

FEATURES

w Part identification

HMF8M16F8VS

(Bottom boot block configuration)

w Access time: 90, 100, 120ns

w High-density 16MByte design

w High-reliability, low-power design

w Single + 3V to 3.6V power supply

w 80-Pin Designed

40-Pin, 0.8mm Fine Pitch Connector P1,P2

w Minimum 100,000 write cycle guarantee
per sector

w 10-year data retention at 85 °C

w Flexible sector architecture

w Embedded algorithms

w Erase suspend / Erase resume

OPTIONS MARKING

w Timing

90ns access - 90

100ns access -100


120ns access -120

w Packages

SMM 80-pin F

P1				P2			
PIN	Symbol	PIN	Symbol	PIN	Symbol	PIN	Symbol
1	VCC	21	VCC	1	VCC	21	VCC
2	NC	22	DQ15	2	CE1*	22	NC
3	NC	23	DQ7	3	CE2*	23	NC
4	NC	24	DQ14	4	CE3*	24	BYTE*
5	NC	25	DQ6	5	CE4*	25	OE*
6	RY_BY*	26	DQ13	6	CE5*	26	CE0*
7	VSS	27	VSS	7	VSS	27	VSS
8	RESET*	28	DQ5	8	CE6*	28	A16
9	WE*	29	DQ12	9	CE7*	29	A0
10	A19	30	DQ4	10	NC	30	A18
11	A8	31	DQ11	11	NC	31	A17
12	A9	32	DQ3	12	NC	32	A7
13	A10	33	DQ10	13	NC	33	A6
14	VSS	34	VSS	14	VSS	34	VSS
15	A11	35	DQ2	15	NC	35	A5
16	A12	36	DQ9	16	NC	36	A4
17	A13	37	DQ1	17	NC	37	A3
18	A14	38	DQ8	18	NC	38	A2
19	A15	39	DQ0	19	NC	39	A1
20	VCC	40	VCC	20	VCC	40	VCC

FUNCTIONAL BLOCK DIAGRAM

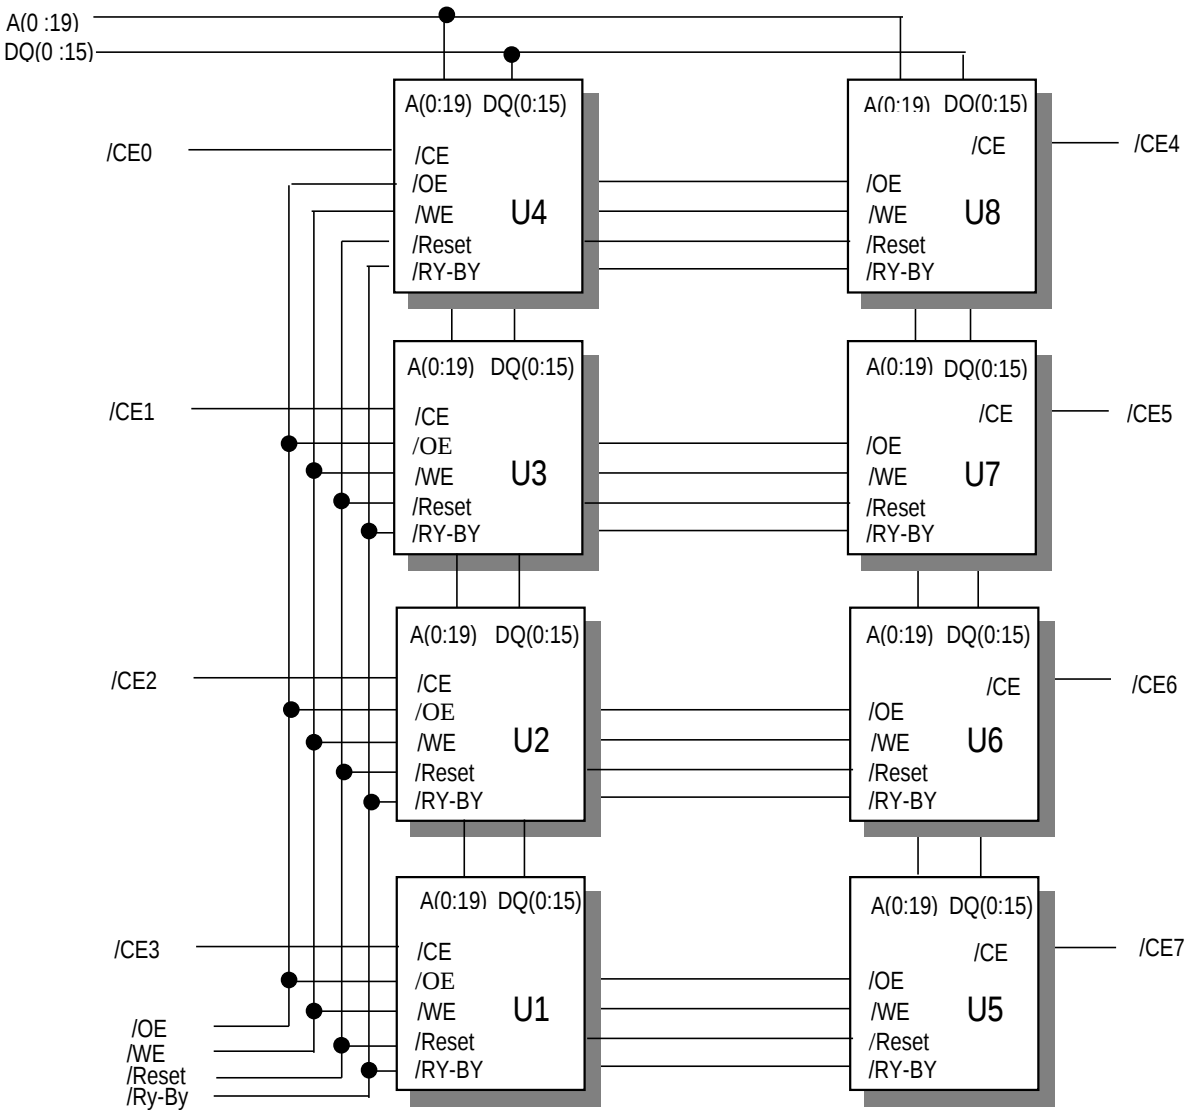

TRUTH TABLE

MODE	/CS	/OE	/WE	RESET	DQ
STANDBY	$V_{CC} \pm 0.3V$	X	X	$V_{CC} \pm 0.3V$	HIGH-Z
RESET	X	X	X	L	HIGH-Z
SECTOR PROTECT	L	H	L	V_{ID}	D_{IN}, D_{OUT}
SECTOR UNPROTECT	L	H	L	V_{ID}	D_{IN}, D_{OUT}
READ	L	L	H	H	D_{OUT}
WRITE	L	H	L	H	D_{OUT}

Note : X means don't care, WE0* Low byte (D0~7) Write enable, WE1* High byte(D8~15) Write enable.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING
Voltage on Any Pin Relative to Vss	-0.5V to $V_{CC} + 0.5V$
Voltage on Vcc Supply Relative to Vss	-0.5V to +4.0V
Output Short Circuit Current	1,600mA
Storage Temperature	-65°C to +150°C
Operating Temperature	-0°C to +70°C

w Stresses greater than those listed under " Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operating section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	RANGE
Vcc for regulated Supply Voltage	+2.0V to 3.6V
Vcc for full voltage	+2.7V to 3.6V

DC AND OPERATING CHARACTERISTICS

PARAMETER	TEST CONDITIONS	SYMBOL	MIN	MAX	UNITS
Input Leakage Current	$V_{IN} = V_{SS}$ to V_{CC} , $V_{CC} = V_{CC} \text{ max}$	I_{L1}	-8.0	+8.0	μA
Output Leakage Current	$V_{OUT} = V_{SS}$ to V_{CC} , $V_{CC} = V_{CC} \text{ max}$	I_{L0}	-8.0	+8.0	μA
Output High Voltage	$I_{OH} = -2.0mA$, $V_{CC} = V_{CC} \text{ min}$	V_{OH}	0.85 V_{CC}		V
Output Low Voltage	$I_{OL} = 4.0mA$, $V_{CC} = V_{CC} \text{ min}$	V_{OL}		0.4	V
Vcc Active Read Current	/CE = V_{IL} , /OE= V_{IL} , f=5MHz	I_{CC1}		128	mA
Vcc Active Write Current	/CE = V_{IL} , /OE= V_{IH}	I_{CC2}		240	mA
Vcc Standby Current	/CE, RESET= $V_{CC} \pm 0.3V$	I_{CC3}		40	μA
Vcc Reset Current	/RESET= $V_{SS} \pm 0.3V$,	I_{CC4}		40	μA
Low Vcc Lock-Out Voltage		V_{LKO}	1.5		V

ERASE AND PROGRAMMING PERFORMANCE

PARAMETER	LIMITS			UNIT	COMMENTS
	MIN.	TYP.	MAX.		
Block Erase Time	-	0.7	15	Sec	Excludes 00H programming prior to erasure
Byte Programming Time	-	9	270	μS	Excludes system-level overhead
Chip Programming Time	-	18	54	sec	Excludes system-level overhead

CAPACITANCE

PARAMETER SYMBOL	PARAMETER DESCRIPTION	TEST SETUP	MIN.	MAX	UNIT
C _{IN}	Input Capacitance	V _{IN} = 0		10	pF
C _{OUT}	Output Capacitance	V _{OUT} = 0		10	pF
C _{IN2}	Control Pin Capacitance	V _{IN} = 0		10	pF


Notes: Test conditions T_A = 25° C, f=1.0 MHz.

AC CHARACTERISTICS**u Read Only Operations Characteristics**

PARAMETER SYMBOLS		DESCRIPTION	CL=100pF						UNIT
JEDEC	STANDARD		-90		-100		-120		
			Min	Max	Min	Max	Min	Max	
t _{AVAV}	t _{RC}	Read Cycle Time	90		100		120		ns
t _{ELQV}	t _{CE}	Chip Enable to Output Delay		90		100		120	ns
t _{GLQV}	t _{OE}	Chip Enable to Output Delay		35		40		50	ns
t _{EHQZ}	t _{DF}	Chip Enable to Output High-Z		30		30		30	ns
t _{AXQX}	t _{QH}	Output Hold Time From Addresses, /CE or /OE, Whichever Occurs First	0		0		0		ns

TEST CONDITIONS

TEST CONDITION	75	ALL OTHERS	UNIT
Output load	1TTL gate		
Output load capacitance, C_L (Including jig capacitance)	30	100	pF
Input rise and full times	5	20	ns
Input pulse levels	0.0 - 3.0	0.45-2.4	V
Input timing measurement reference levels	1.5	0.8, 2.0	V
Output timing measurement reference levels	1.5	0.8, 2.0	V

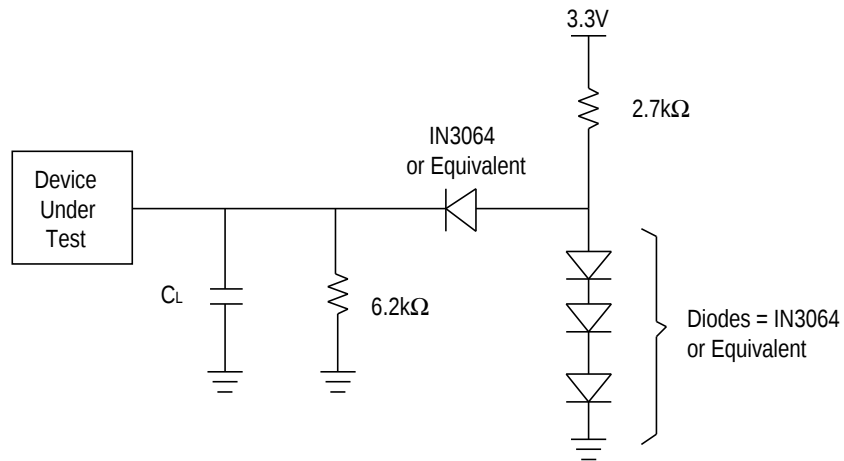

Note : C_L = 100pF including jig capacitance



u Erase/Program Operations

PARAMETER SYMBOLS		DESCRIPTION	C _L =100pF						UNIT
JEDEC	STANDARD		-90		-100		-120		
			Min	Max	Min	Max	Min	Max	
t _{AVAV}	t _{WC}	Write Cycle Time	90		100		120		ns
t _{AVWL}	t _{AS}	Address Setup Time	0		0		0		ns
t _{WLAX}	t _{AH}	Address Hold Time	45		45		50		ns
t _{DVWH}	t _{DS}	Data Setup Time	45		45		50		ns
t _{WHDX}	t _{DH}	Data Hold Time	0		0		0		ns
	t _{OES}	Output Enable Setup Time	0		0		0		ns
t _{GHWL}	t _{GHWL}	Read Recover Time Before Write	0		0		0		ns
t _{ELWL}	t _{CS}	/CE Setup Time	0		0		0		ns
t _{WHEH}	t _{CH}	/CE Hold Time	0		0		0		ns
t _{WLWH}	t _{WP}	Write Pulse Width	45		45		50		ns

t_{WHWL}	t_{WPH}	Write Pulse Width High	30		30		30		ns
t_{WHWH1}	t_{WHWH1}	Byte Programming Operation	9		9		9		μ s
t_{WHWH2}	t_{BERS}	Block Erase Operation	0.7		0.7		0.7		sec
	t_{VCS}	Vcc Setup Time	50		50		50		μ s
	t_{RB}	Recovery time from RY/BY	0		0		0		ns
	t_{BUSY}	Program/Erase Valid to RY/BY Delay	90		90		90		ns


u Alternate /CE Controlled Erase/Program Operations

PARAMETER SYMBOLS		DESCRIPTION	C _L =100pF						UNIT
			-90		-100		-120		
JEDEC	STANDARD		Min	Max	Min	Max	Min	Max	
t _{AVAV}	t _{WC}	Write Cycle Time	90		100		120		ns
t _{AVEL}	t _{AS}	Address Setup Time	0		0		0		ns
t _{ELAX}	t _{AH}	Address Hold Time	45		45		50		ns
t _{DVEH}	t _{DS}	Data Setup Time	45		45		50		ns
t _{EHDx}	t _{DH}	Data Hold Time	0		0		0		ns
	t _{OES}	Output Enable Setup Time	0		0		0		ns
t _{GH_{EL}}	t _{GH_{EL}}	Read Recover Time Before Write	0		0		0		ns
t _{WL_{EL}}	t _{WS}	/OE High to /WE Low	0		0		0		ns
t _{EHWH}	t _{WH}	/WE Hold Time	0		0		0		ns
t _{EL_{EH}}	t _{CP}	/CE Pulse Width	45		45		50		ns
t _{EH_{EL}}	t _{CPH}	/CE Pulse Width High	30		30		30		ns
	t _{BUSY}	Program/Erase Valid RY//BY Delay	90		90		90		ns
	t _{RB}	Recovery Time from RY//BY	0		0		0		ns

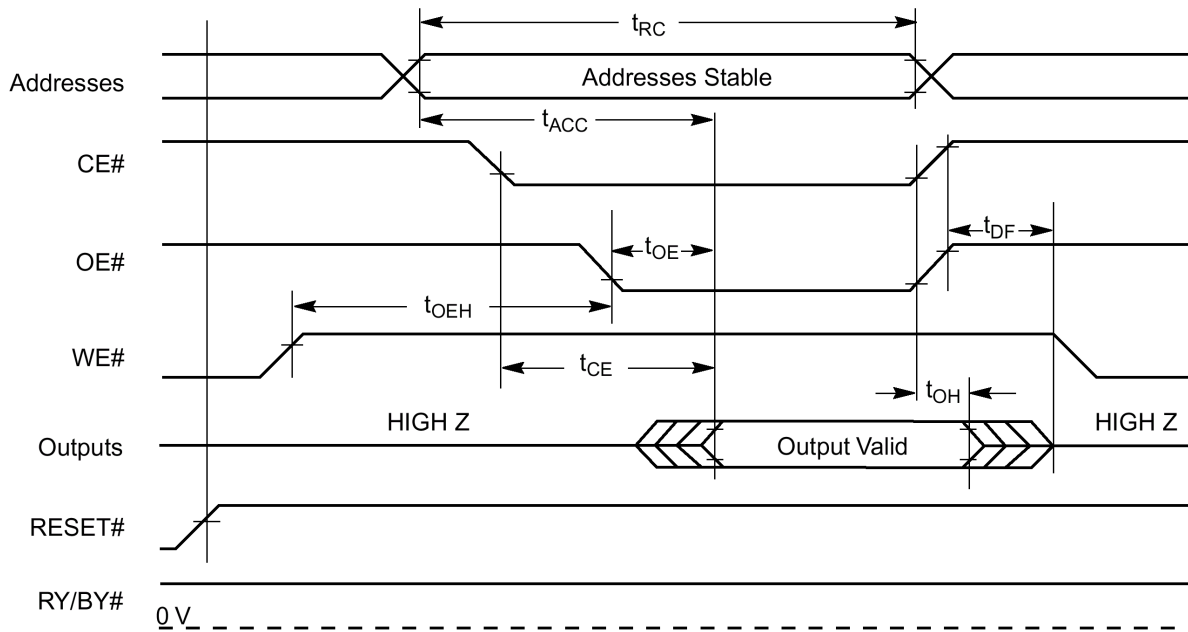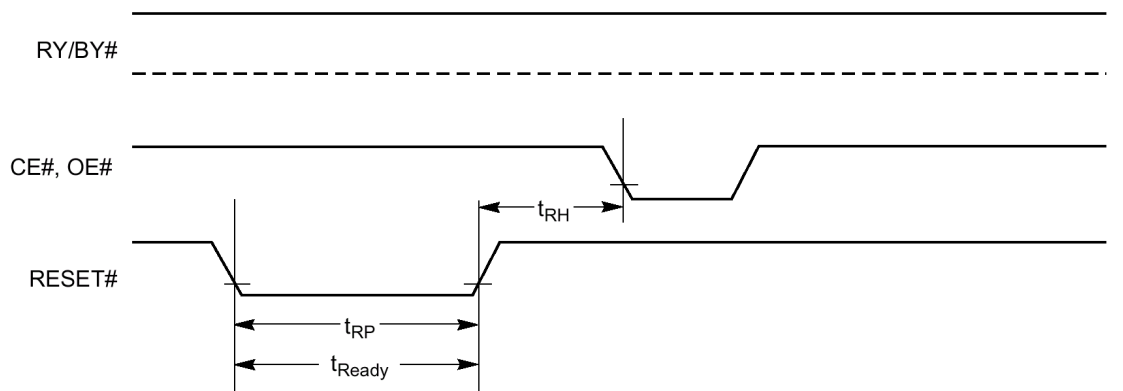
u READ OPERATIONS TIMING**u RESET TIMING**

Reset Timings NOT during Embedded Algorithms


Reset Timings during Embedded Algorithms


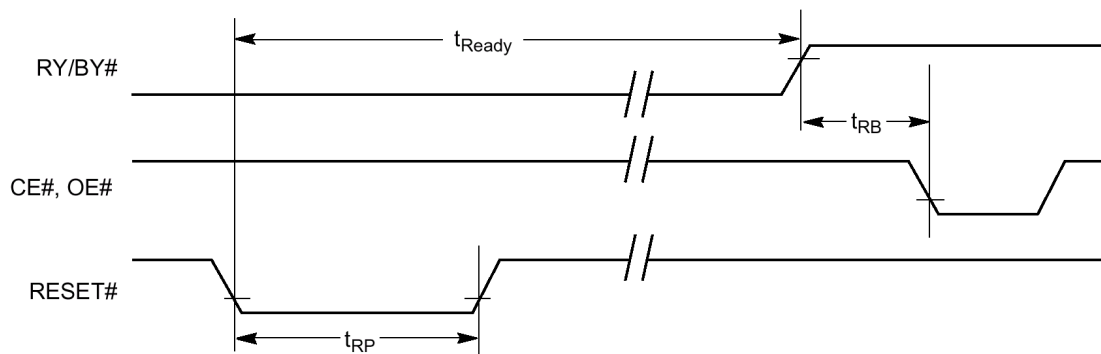


u PROGRAM OPERATIONS TIMING

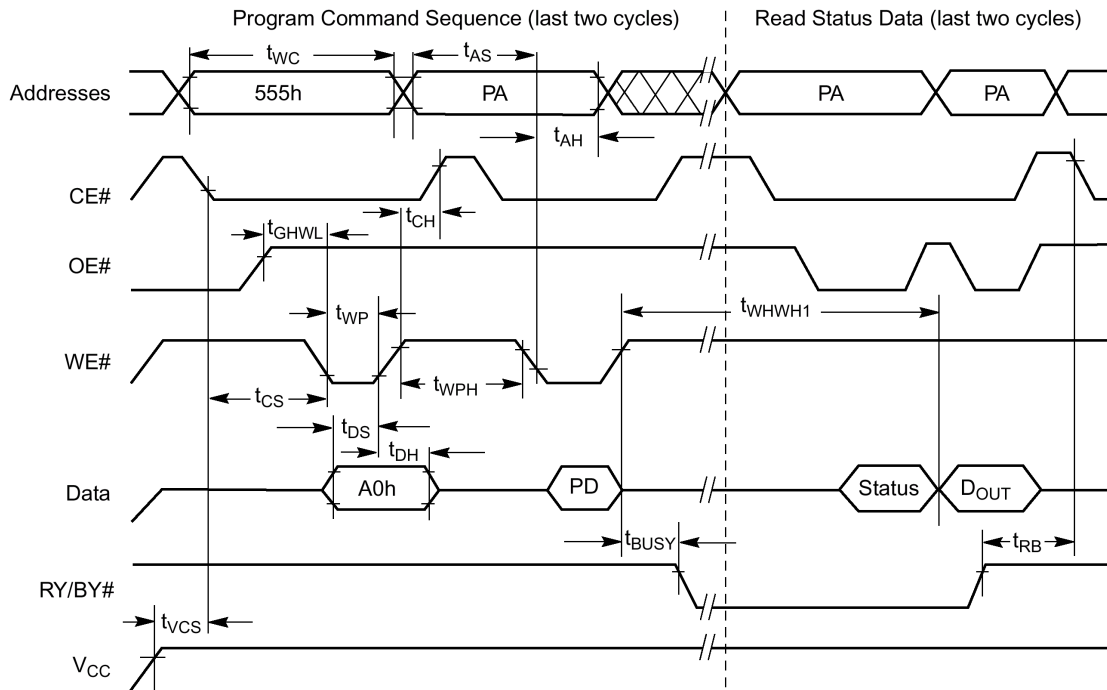


u CHIP/SECTOR ERASE OPERATION TIMINGS

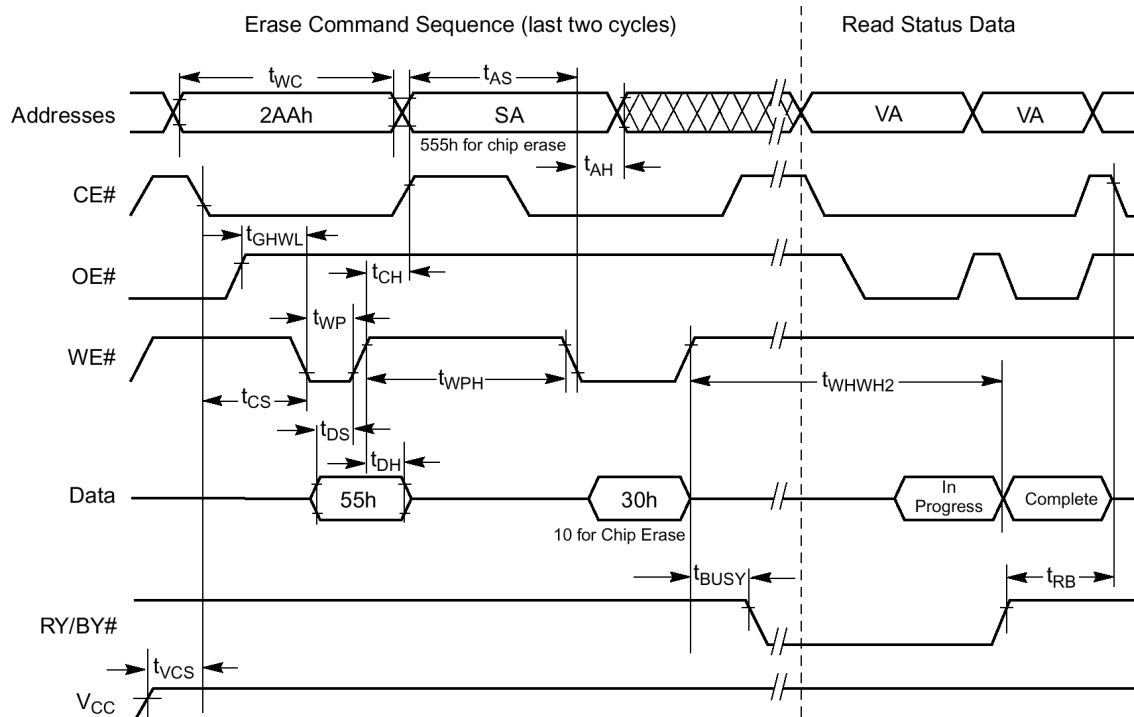


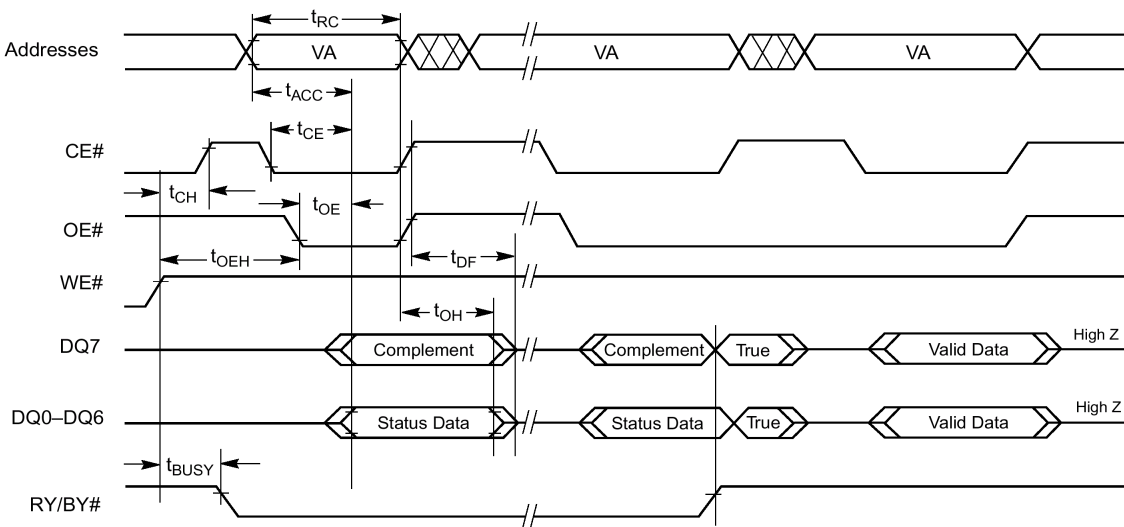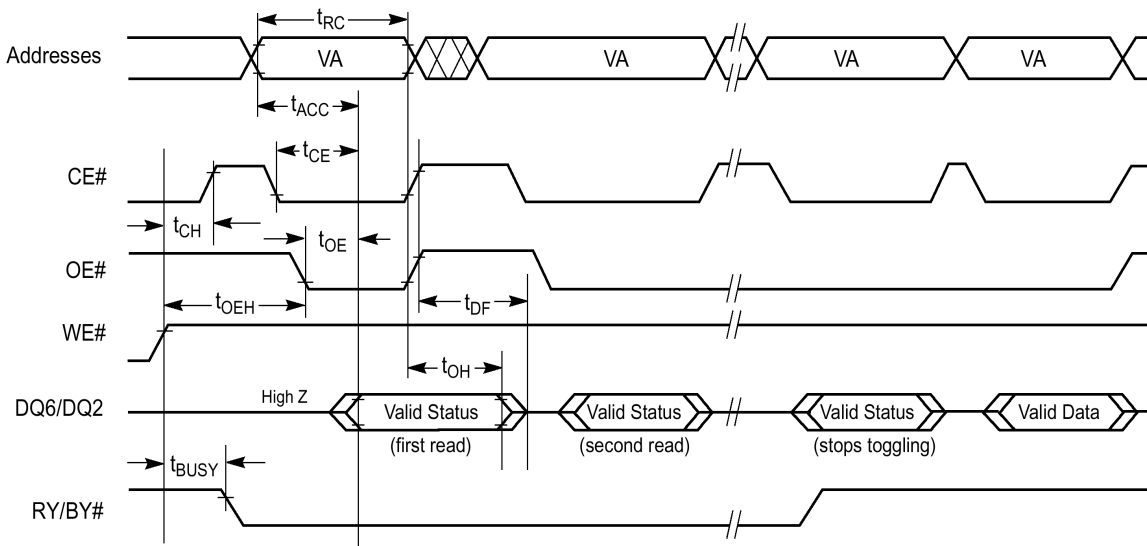u DATA# POLLING TIMES(DURING EMBEDDED ALGORITHMS)**u TOGGLE# BIT TIMINGS (DURING EMBEDDED ALGORITHMS)**

u SECTOR PROTECT UNPROTECT TIMEING DIAGRAM

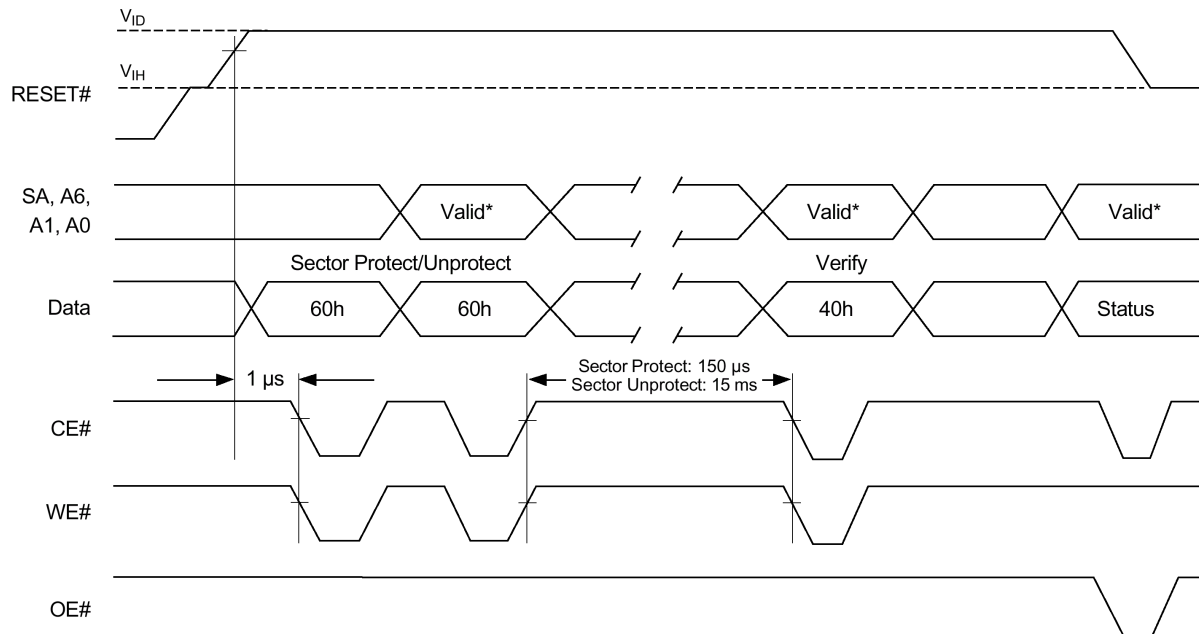


u ALTERNATE CE# CONTROLLED WRITE OPERATING TIMINGS

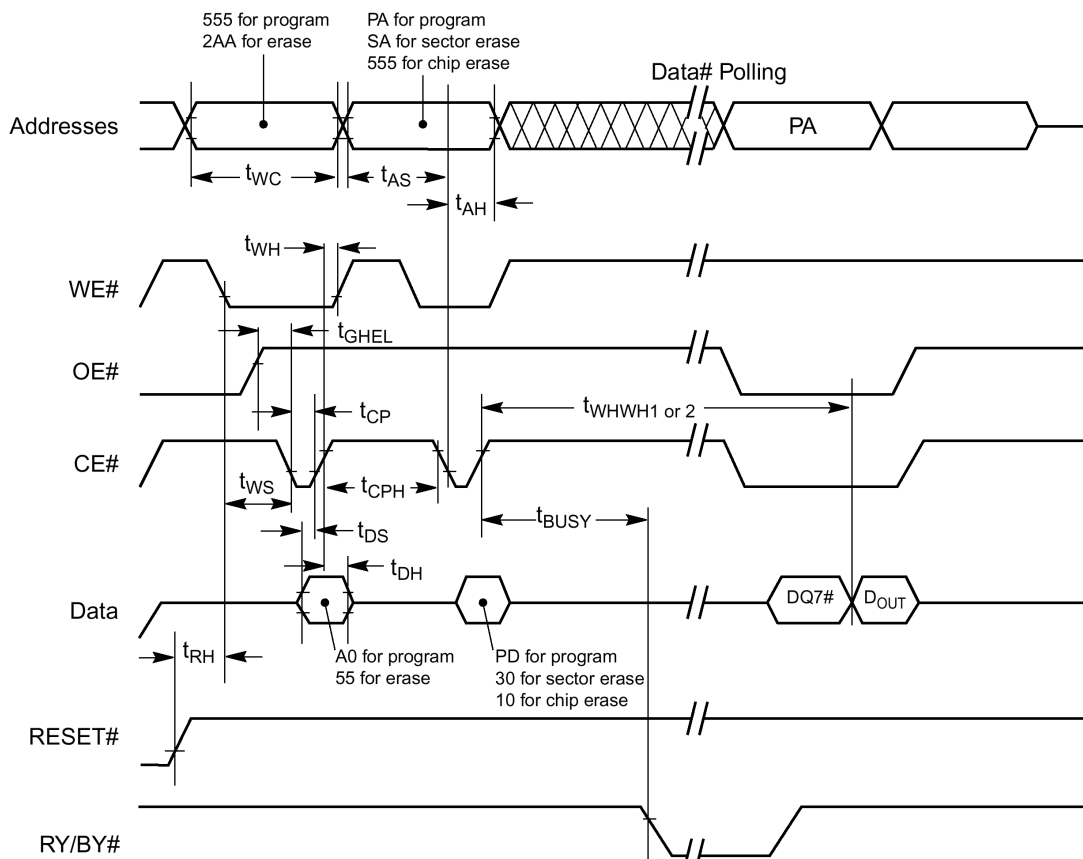


PACKAGE DIMENSIONS

UNIT: mm

(Front-Side)

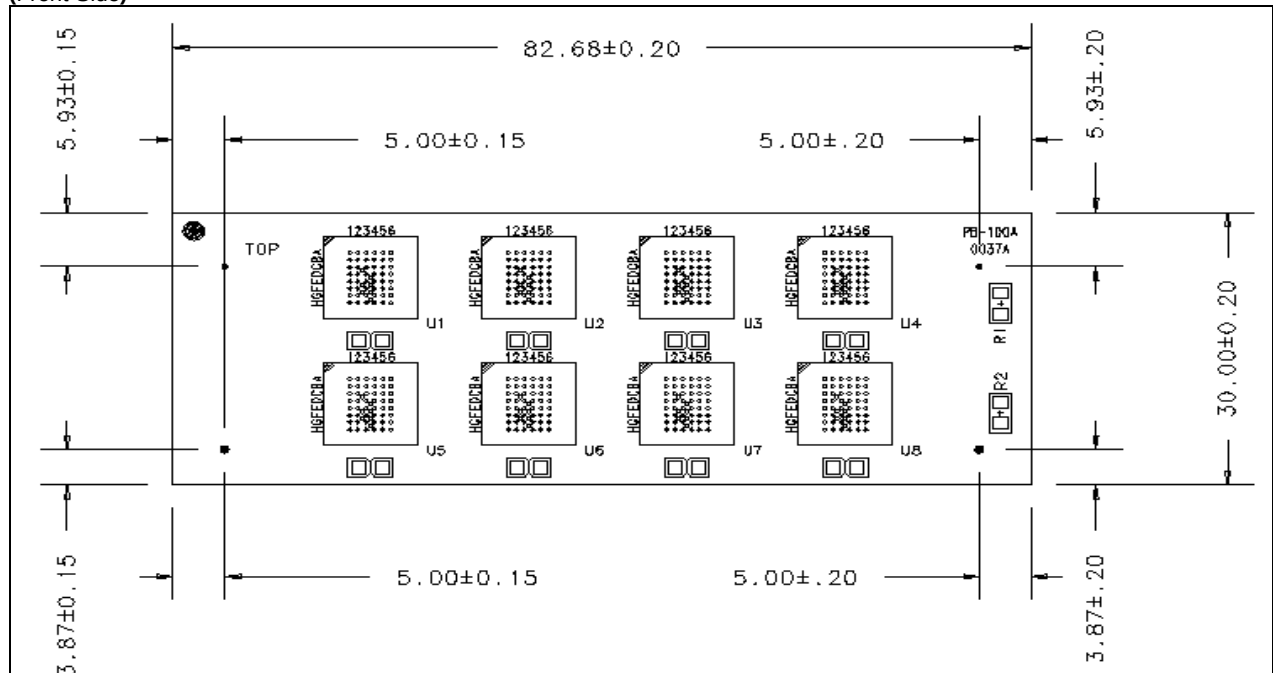

(Rear-Side)

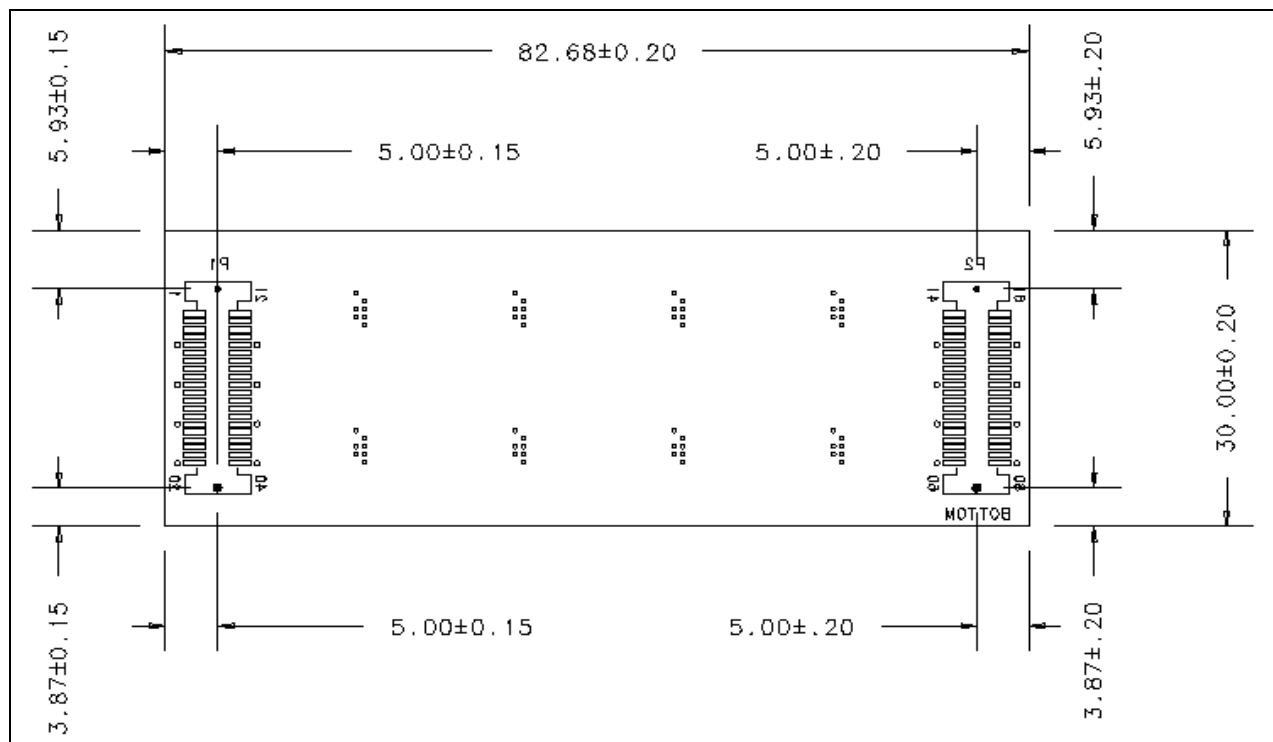

ORDERING INFORMATION

Part Number	Density	Org.	Package	Component Number	Vcc	SPEED
HMF8M16F8VS-90	16MByte	x 16	80Pin -SMM	8EA	3.3V	90ns
HMF8M16F8VS-100	16MByte	x 16	80Pin -SMM	8EA	3.3V	100ns
HMF8M16F8VS-120	16MByte	x 16	80Pin -SMM	8EA	3.3V	120ns