

VI TELEFILTER**Filter specification****TFS 440 - 1/5****Measurement condition**

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedances
 for input: 250 Ω // -0.8 pF
 for output: 250 Ω // -0.8 pF

Characteristics**Remark:**

Reference level for the relative attenuation a_{rel} of the TFS 440 is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed on 440 MHz without tolerance. The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below also if the centre frequency f_c is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_c .

Data		typ. Value		tolerance/limit		
Insertion loss (Reference level)	$a_e = a_{min}$	4.4	dB	max.	6,5	dB
Nominal frequency	f_N	-			440,000	MHz
Guaranteed 1,5 dB signal band width	BW	293	kHz	min.	140	kHz
Relative attenuation	a_{rel}					
$f_N \pm 70$ kHz		0.5	dB	max.	1,5	dB
$f_N \pm 100$ kHz		1.0	dB	max.	3,0	dB
$f_N \pm 400$ kHz ... $f_N \pm 600$ kHz		29	dB	min.	25	dB
$f_N \pm 600$ kHz ... $f_N \pm 800$ kHz		48	dB	min.	40	dB
$f_N \pm 800$ kHz ... $f_N \pm 3$ MHz		58	dB	min.	50	dB
$f_N \pm 3$ MHz ... $f_N \pm 78$ MHz		62	dB	min.	50	dB
Group delay ripple	GD					
$f_N \pm 100$ kHz		1.1	µs	max.	2	µs
Operating temperature range		- 20 °C ... + 70 °C				
Maximum Input Power					10	dBm
Temperature coefficient of frequency	TC	ca. - 0.036 ppm/K ²				
Frequency inversion temperature		+ 25 °C				

Generated: _____**Checked / approved:** _____


VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Construction, pin configuration and 50 Ω - matching network

(All dimensions in mm)

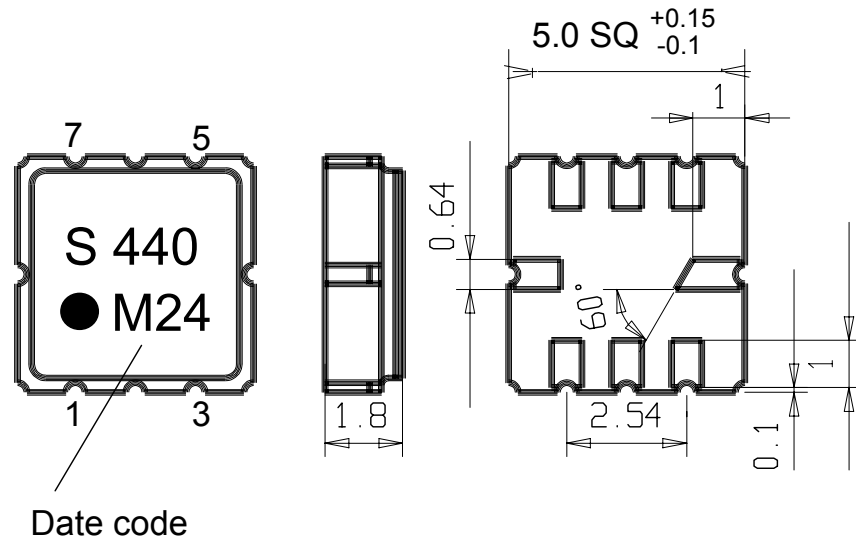


Pin 1 Sym. Output
 Pin 2 Sym. Output
 Pin 3 External Coil
 Pin 4,8 Package Ground


Pin 5 Sym. Input
 Pin 6 Sym. Input
 Pin 7 Ground

Date code: Year + week
 K 1998
 L 1999
 M 2000
 ...

50 Ohm Test circuit 1

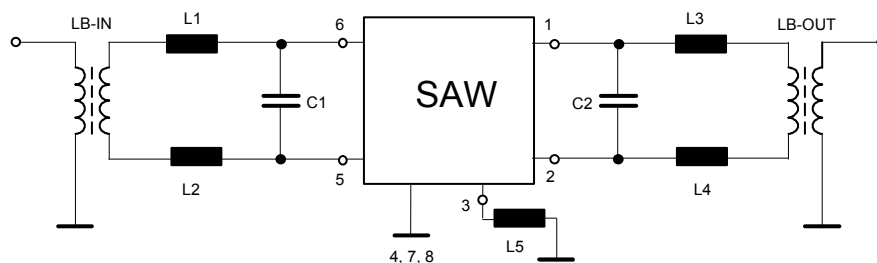

50 Ohm Test circuit 2

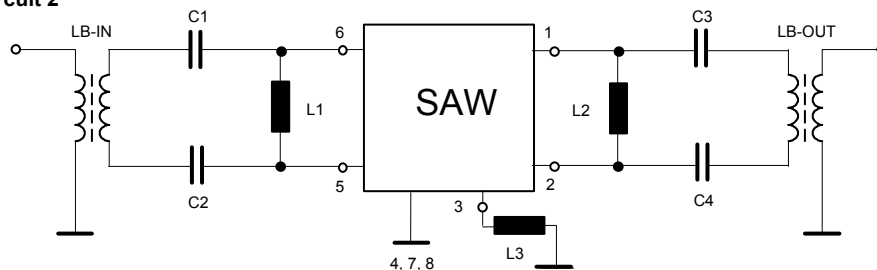

VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

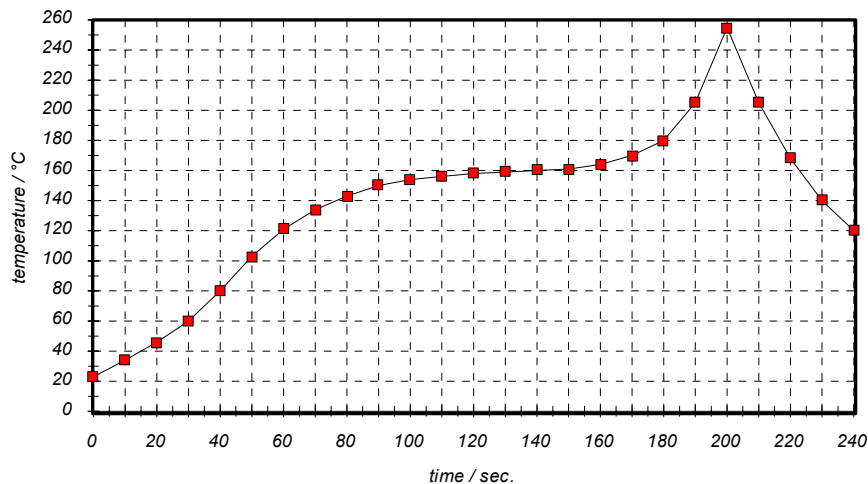
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter specification****TFS 440 - 5/5**

History

Version	Reason of Changes	Name	Date
1.3	Correct tape and reel information Guarantee stronger values in stability characteristics Add limit values for package dimensions Add history	Dr. Wall	15.06.2000

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.