




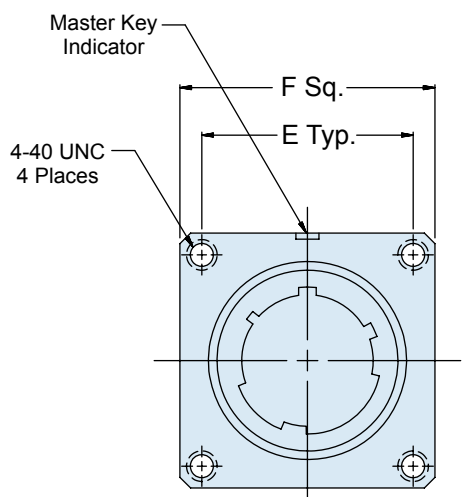


650HS058 Dummy Stowage Receptacle for MIL-DTL-38999 Series III Connector

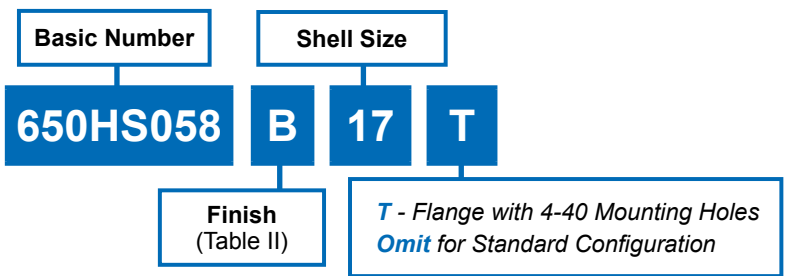


Style T
Metal and Composite Configuration
with 4-40 UNC Mounting Holes

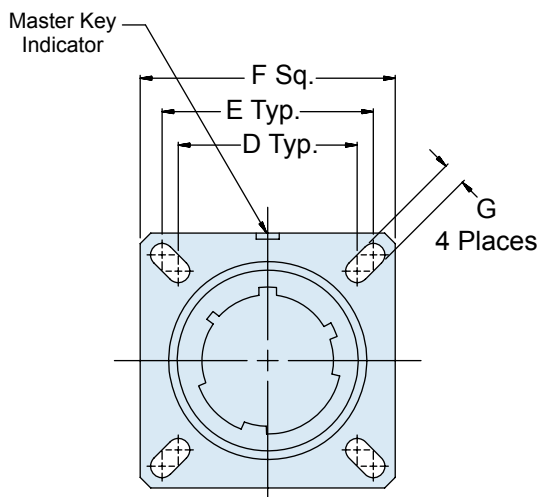

Standard Configuration
(Metal Shell)

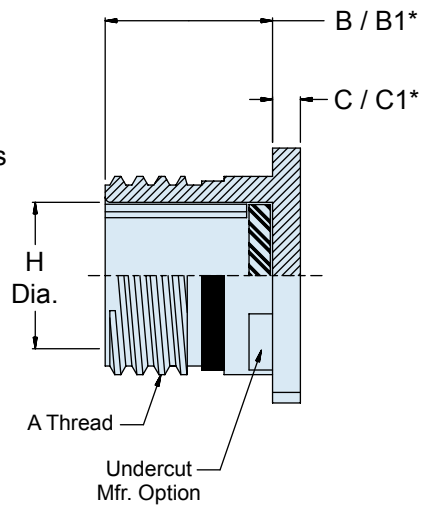

*** Denotes the Following:**
 B (For Aluminum or Stainless Steel)
 B1 (For Composite)
 C (For Aluminum or Stainless Steel)
 C1 (For Composite)

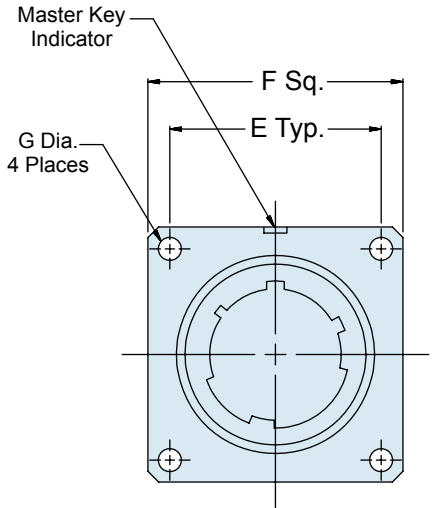

Standard Configuration
(Composite Shell Finish XM and XW)

APPLICATION NOTES

1. See applicable Military Specification for complete dimensions.
2. Metric dimensions (mm) are indicated in parentheses.



650HS058 Dummy Stowage Receptacle for MIL-DTL-38999 Series III Connector



TABLE II: FINISHES

Symbol	Finish
B	Cadmium Plate, Olive Drab
J	Gold Iridite over Cadmium Plate over Nickel
M	Electroless Nickel
N	Cad Plate, Olive Drab over Electroless Nickel
NF	Cadmium Plate, Olive Drab over Electroless Nickel
T	Cad Plate / Bright Dip over Nickel
Z1	300 Series SST, Passivated
MT	Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
XM	Composite, Electroless Nickel
XW	Composite, Cadmium Olive Drab over Electroless Nickel
XZN	Composite, Zinc-Nickel

TABLE I: DIMENSIONS

Shell Size	Shell Size Ref	A Thread	B +.000 -.005 (.13)	B1 +.055 -.000	C ±.012 (0.3)	C1	D
A	9	.625-.1P-3LTS	.820 (20.83)	.768 (19.5)	.098 (2.5)	.144/.087 (3.65/2.2)	.594 (15.09)
B	11	.750-.1P-3LTS	.820 (20.83)	.768 (19.5)	.098 (2.5)	.144/.087 (3.65/2.2)	.719 (18.26)
C	13	.875-.1P-3LTS	.820 (20.83)	.768 (19.5)	.098 (2.5)	.144/.087 (3.65/2.2)	.812 (20.62)
D	15	1.000-.1P-3LTS	.820 (20.83)	.768 (19.5)	.098 (2.5)	.144/.087 (3.65/2.2)	.906 (23.01)
E	17	1.187-.1P-3LTS	.820 (20.83)	.768 (19.5)	.098 (2.5)	.144/.087 (3.65/2.2)	.969 (24.61)
F	19	1.250-.1P-3LTS	.820 (20.83)	.768 (19.5)	.098 (2.5)	.144/.087 (3.65/2.2)	1.062 (26.97)
G	21	1.375-.1P-3LTS	.790 (20.07)	.736 (18.7)	.126 (3.2)	.171/.114 (4.35/2.9)	1.156 (29.36)
H	23	1.500-.1P-3LTS	.790 (20.07)	.736 (18.7)	.126 (3.2)	.171/.114 (4.35/2.9)	1.250 (31.75)
J	25	1.625-.1P-3LTS	.790 (20.07)	.736 (18.7)	.126 (3.2)	.171/.114 (4.35/2.9)	1.375 (34.93)

TABLE I: DIMENSIONS (CONTINUED)

Shell Size	Shell Size Ref	E	F ±.012 (0.3)	G Dia ±.008 (0.2)	H +.000 -.005 (.127)
A	9	.719 (18.26)	.937 (23.8)	.128 (3.25)	.492 (12.5)
B	11	.812 (20.62)	1.031 (26.2)	.128 (3.25)	.620 (15.7)
C	13	.906 (23.01)	1.126 (28.6)	.128 (3.25)	.769 (19.5)
D	15	.969 (24.61)	1.220 (31.0)	.128 (3.25)	.894 (22.7)
E	17	1.062 (26.97)	1.311 (33.3)	.128 (3.25)	1.019 (25.9)
F	19	1.156 (29.36)	1.437 (36.5)	.128 (3.25)	1.124 (28.5)
G	21	1.250 (31.75)	1.563 (39.7)	.128 (3.25)	1.249 (31.7)
H	23	1.375 (34.93)	1.689 (42.9)	.154 (3.91)	1.375 (34.9)
J	25	1.500 (38.10)	1.811 (46.0)	.154 (3.91)	1.499 (38.1)

