


CL5M SERIES

HERMETICALLY SEALED TO-8 CASE

- 9 Types
- Maximum Power — Air: ½ Watt @ 25°C
- Maximum Power — Heat Sink: 2 Watts @ 25°C Case
- Resistance Tolerance at 2 ft-c: $\pm 33\text{-}1/3\%$
- 6 Photoconductive Materials
- Temperature Range: -50°C to $+75^{\circ}\text{C}$

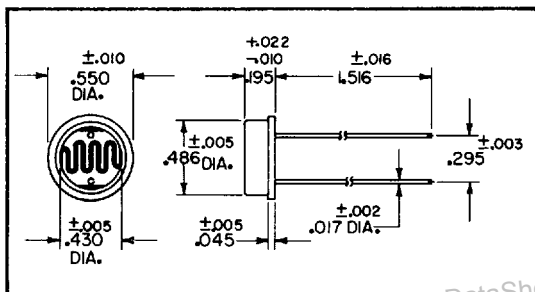

TYPE	Sensitive Material	Peak Spectral Response (Angstroms)	Resistance @ 2ft-c (Ohms)	Min. Dark Resistance 5 sec. After 2 ft-c	Maximum Voltage Rating (Peak A.C.)	Measurement Voltage
CL5M2	Type 2 CdS	5150	55K	3.6 Meg	250V	10V
CL5M2L			9K	600K	170V	12V
CL5M3	Type 3 CdSe	7350	7.2K	48 Meg	250V	12V
CL5M4	Type 4 CdSe	6900	1.5K	400K	250V	10V
CL5M4L			.25K	67K	170V	1.35V
CL5M5	Type 5 CdS	5500	9K	600K	250V	12V
CL5M5L			1.5K	100K	170V	10V
CL5M7	Type 7 CdS	6150	7.2K	1.4 Meg	250V	12V
CL5M9M	Type 9 CdS	5500	11K	7.3 Meg	170V	10V

MEASUREMENT DATA • All measurements at 2854°K • Cells light adapted 16 hrs. at 30 ft—c prior to test
 • Measurement voltage is D.C. applied voltage for measuring resistance • All readings made at 25°C ambient.