


Typ ST30..

- 7,62 mm pin spacing
- 2 .. 16-poles single mold
- horizontal header
- selective loading possible
- not to be connected or disconnected under electrical load
- open end

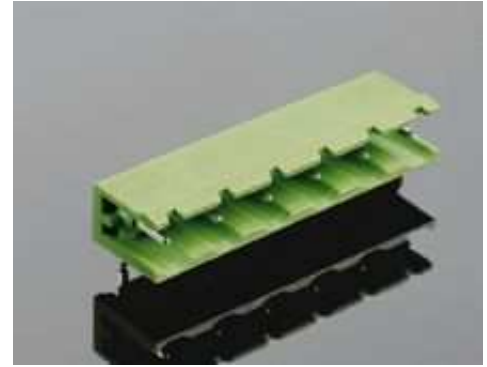

Rated voltage	cULus 300 V	VDE 400 V
Rated current	15 A	12 A
Rated impulse voltage		6 kV
Pollution degree		3
Dimensions	Spacing PCB hole diameter	7,62 mm 1,4 mm
Materials	Insulating material Flammability class Temperature range	PA UL 94 V-0 -30°C/+105°C
Colour	Contact pin RAL 6018	Cu green

Dimensions

