

Features

- IEC input connector

Applications

- PCs, Monitors, Printers, PDPs and Measuring devices.




Safety Agency : Standard	File No.
UL : UL-1283	E78644
C-UL : C22.2, NO.8-M1986	E78644
SEMKO : EN133200	SE/0142-10A


The "ENCE" mark is a common European product certification mark based on testing to harmonised European safety standard.




Dimensions

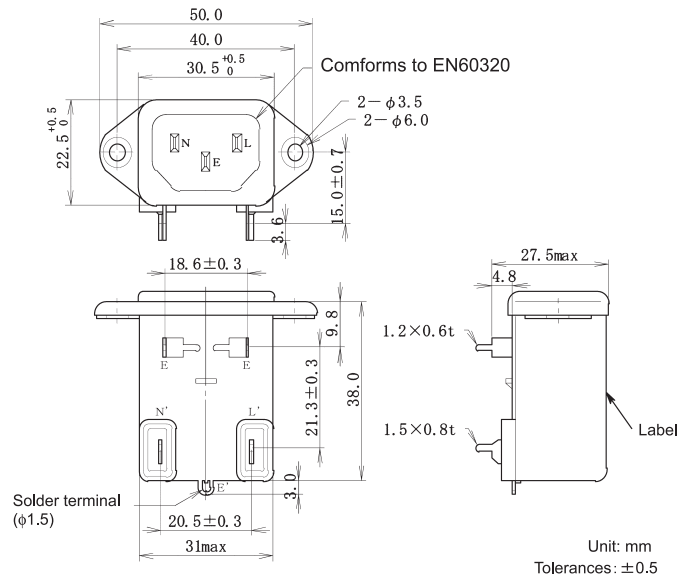

Static characteristics

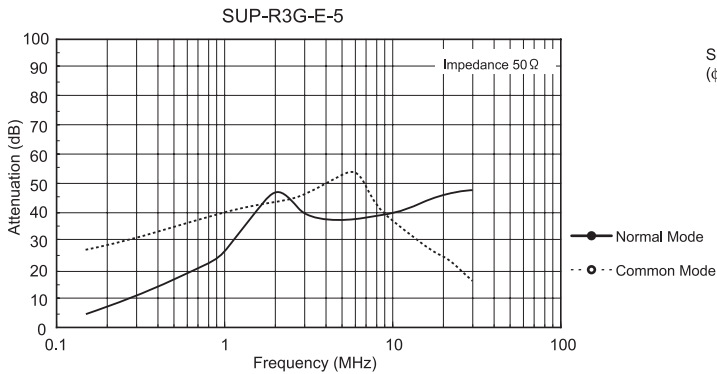

Circuit

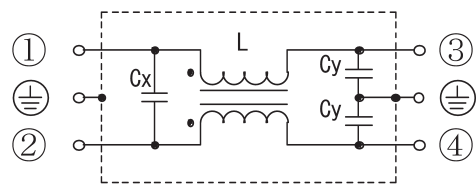

Electrical Specifications

Rated Voltage **250VAC**

Safety Agency	Model Number	Rated Current (A)	Test Voltage	Insulation Resistance	Leakage Current (max)	Voltage Drop (max)	Temperature Rise (max)	Operating Temperature (°C)	Insertion losses	
									Normal Mode (MHz)	Common Mode (MHz)
 	SUP-R3G-E-5	3	Line to Ground 1500Vrms 50/60Hz 60sec	Line to Ground 100MΩmin (at 500Vdc)	0.5mA (at 250Vrms 60Hz)	1.0Vrms	50K	-25 ~ +50	2.0 ~ 30	1.0 ~ 10
	SUP-R6G-E-5	6							2.0 ~ 30	1.0 ~ 10
	SUP-R10G-E-5	10							* 2.0 ~ 30	* 2.0 ~ 10

Guaranteed attenuation is more than 20dB. (*more than 15dB)