
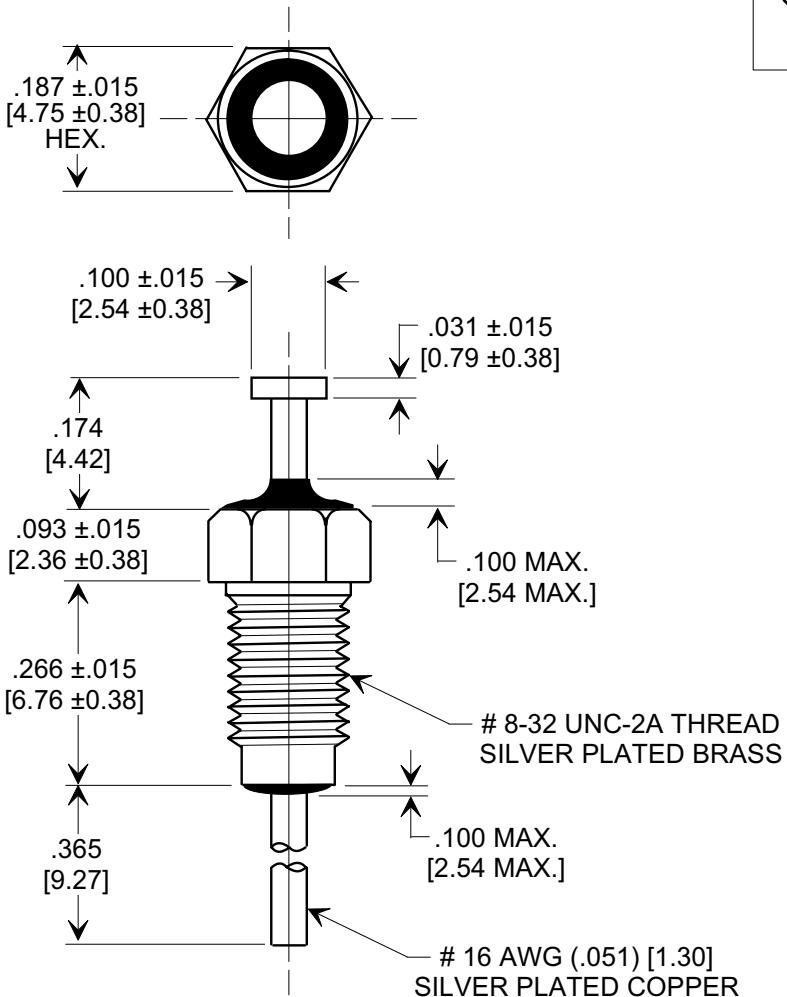



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

This drawing is the property of
 Tusonix, Inc., and may not be
 used, reproduced, published or
 disclosed to others without ex-
 pressed authorization by Tusonix Inc.

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



SPECIFICATIONS

TUSONIX STYLE:	2425-000
CAP. VALUE:	1,000 pF
CAP. TOLERANCE:	±20%
TEMP. CHARACTERISTIC:	X5S
RATING:	200 VDC @ + 85°C/100 VDC @ +125°C
OPERATING RANGE:	-55°C TO +125°C
IR MIN. @ 100 VDC:	10 G Ω
DWV VDC:	600

NOTES:

1. SUPPLIED WITHOUT HEX NUT AND LOCK WASHER.
2. MOUNTING TORQUE NOT TO EXCEED 2.5 lb-in. [.282 Nm].
3. TUSONIX STANDARD PART NUMBER: 2425-000-X5S0-102M. TUSONIX RoHS COMPLIANT PART NUMBER: 2425-000-X5S0-102M LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
4. PART MARKING: STANDARD PART: BLACK INK FOR TRADEMARK AND CAP. CODE RoHS PART: GREEN INK FOR TRADEMARK AND CAP. CODE.

REVISION RECORD	0		--TOLERANCES-- Unless Otherwise Specified	Title	MINIATURE BUSHING FEED-THRU	
	Original Release C.O. 20020718-3-01	REVISED RATING, OPERATING RANGE & ADDED & REVISED NOTES. S.M. 03-06-06			DECIMAL ± .031 [0.79]	Drawn S.M. 07-22-02
	20060217-2-01		ANGLES ±	Approved T.C. 07-22-02	Scale X 4	
				TUSONIX TUCSON, ARIZONA	A	2425-000-X5S0-102M