
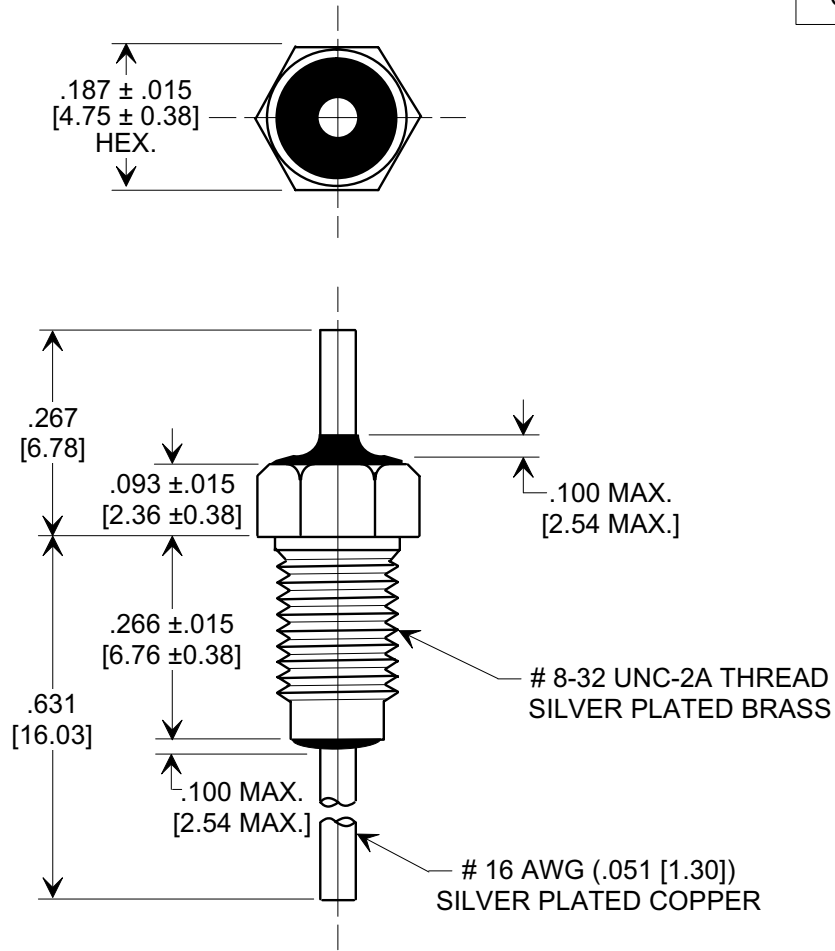



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



SPECIFICATIONS

Tusonix Style:	2425-544
Capacitance Value:	100 pF
Capacitance Tolerance:	±20%
Temp. Characteristic:	X7R
Rating:	200 VDC @ + 85°C / 100 VDC @ +125°C
Current (A):	20
Operating Range:	-55°C TO +125°C
Insulation Resistance:	10,000 megohms (min.) @ +25°C
DWV @ 2 Sec. Min:	600 VDC

NOTE:

- SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
- MOUNTING TORQUE NOT TO EXCEED 5 lb - in. MAX. [.565 N-m]

REVISION RECORD	Original Release C.O.	WAS SK 7540-020. S.M. 05-17-99	1	TUSONIX STYLE 2425-544 WAS 2425-044 L.E. 01-18-05	2	DIM'S & TOL'S REV'D .267 WAS .265 L.E. 04-01-05	3	20050331-3-01	--TOLERANCES-- Unless Otherwise Specified	Title	MINIATURE BUSHING FEED-THRU				
	0	19990511-10-02							0	DECIMAL ± .031[0.79]	Drawn	S.M. 04-13-99	Scale	4 X	
	TUSONIX STYLE CURRENT (A), DWV COLUMNS ADDED & NOTE 2 REVISED L.E. 05-27-04								1	20040514-3-14	1	Approved		J.Mc. 04-13-99	
	TUSONIX STYLE CURRENT (A), DWV COLUMNS ADDED & NOTE 2 REVISED L.E. 05-27-04								1	20040514-3-14	1	Approved		J.Mc. 04-13-99	
TUSONIX STYLE CURRENT (A), DWV COLUMNS ADDED & NOTE 2 REVISED L.E. 05-27-04		1	20040514-3-14	1	Approved		J.Mc. 04-13-99		A 2425-544-X7R0-101M						
TUSONIX STYLE CURRENT (A), DWV COLUMNS ADDED & NOTE 2 REVISED L.E. 05-27-04		1	20040514-3-14	1	Approved		J.Mc. 04-13-99								
TUSONIX STYLE CURRENT (A), DWV COLUMNS ADDED & NOTE 2 REVISED L.E. 05-27-04		1	20040514-3-14	1	Approved		J.Mc. 04-13-99		TUCSON, ARIZONA						