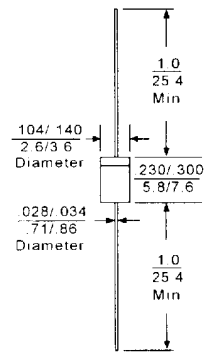


TRANSIENT VOLTAGE SUPPRESSORS

250 Watts		BREAKDOWN VOLTAGE			WORKING PEAK REVERSE VOLTAGE V_{RWM} (Volts)	MAXIMUM REVERSE LEAKAGE at V_{RWM} I_L (uA)	PEAK PULSE CURRENT I_{PP} (Amps)	MAXIMUM CLAMPING VOLTAGE at I_{PP} V_C (Volts)	MAXIMUM TEMPERATURE COEFFICIENT of V_{BR} (%/°C)	PACKAGE QUANTITIES BULK/REEL	OUTLINE Inches/Millimeters
1S1 PART NUMBER BIPOLAR	1S1 PART NUMBER UNI-POLAR	V_{BR} (Volts)		at I_L (mA)							
		Min	Max								
2B15	2U15	13.5	16.5	1.0	12.1	5.0	11.4	22.0	0.076	1000/ 5000	
2B16	2U16	14.4	17.6	1.0	12.9	5.0	10.6	23.5	0.078		
2B18	2U18	16.2	19.8	1.0	14.5	5.0	9.43	26.5	0.079		
2B20	2U20	19.0	22.0	1.0	16.2	5.0	8.59	29.1	0.081		
2B22	2U22	19.8	24.2	1.0	17.8	5.0	7.84	31.9	0.082		
2B24	2U24	21.6	26.4	1.0	19.4	5.0	7.20	34.7	0.084		
2B27	2U27	24.3	29.7	1.0	21.8	5.0	6.39	39.1	0.085		
2B30	2U30	27.0	33.0	1.0	24.3	5.0	5.75	43.5	0.086		
2B33	2U33	29.7	36.3	1.0	26.8	5.0	5.24	47.7	0.087		
2B36	2U36	32.4	39.6	1.0	29.1	5.0	4.81	52.0	0.089		
2B39	2U39	35.1	42.9	1.0	31.6	5.0	4.43	56.4	0.090		
2B43	2U43	38.7	47.3	1.0	34.8	5.0	4.04	61.9	0.091		
2B47	2U47	42.3	51.7	1.0	38.1	5.0	3.69	67.8	0.092		
2B51	2U51	45.9	56.1	1.0	41.3	5.0	3.40	73.5	0.093		
2B56	2U56	50.4	61.6	1.0	45.4	5.0	3.11	80.5	0.094		
2B62	2U62	55.8	68.2	1.0	50.2	5.0	2.81	89.0	0.095		
2B68	2U68	61.2	74.8	1.0	55.1	5.0	2.55	98.0	0.096		
2B75	2U75	67.5	82.5	1.0	60.7	5.0	2.31	108	0.098		
2B82	2U82	73.8	90.2	1.0	66.4	5.0	2.12	118	0.099		
2B91	2U91	81.9	100	1.0	73.7	5.0	1.91	131	0.100		
2B100	2U100	90.0	110	1.0	81.0	5.0	1.74	144	0.101		
2B110	2U110	99.0	121	1.0	89.2	5.0	1.58	158	0.102		
2B120	2U120	108	132	1.0	97.2	5.0	1.45	173	0.103		
2B130	2U130	117	143	1.0	105	5.0	1.34	187	0.104		
2B150	2U150	135	165	1.0	121	5.0	1.16	215	0.105		

DO-15