www.DataSheet4U.com

BOLYMIN

BG19264A

Feature

1. COB with metal frame
2. Built-in controller KS107/108
3. +5V single power supply, with built-in negative voltage
4. 1/64 duty cycle
5. Option: Temperature compensation circuit
6. LED B/L Pins: 19/20, or A/K , or 1/2
7. Option: LED array/edge B/L, EL B/L
8. Option: +3V single power supply
9. Option: negative voltage (built-in, external)

Mechanical Data

Item	Standard Value	Unit
Module Dimension	93.0 x 70.0	mm
Viewing Area	72.0 x 40.0	mm
Dot Size	0.48 x 0.48	mm
Dot Pitch	0.52 x 0.52	mm

Pin Assignment

Pin	Symbol	Function
1	/CSA	Chip select A:
2	/CSB	Chip select B:
3	Vss	Ground
4	Vdd	Power supply for logic (+5V)
5	Vo	Power supply for LCD driver
6	D/I	Data or instruction select input
7	R/W	Read/Write control signal input pin
8	E	Chip Enable
9~16	DB0~DB7	Data input / output
17	RST	Reset
18	Vee	Negative voltage output
19	LED(+)	ANode of backlight
20	LED(-)	Cathode of backlight

Electronic Characteristics

Item	Symbol	Condition	Typical Value	Unit
Input Voltage	Vdd	Vdd = +5V	5.0	V
Supply Current	Idd	Vdd = +5V	9.7	mA
LCD Driving Voltage	Vdd-Vo	25°C	9	V
LED Forward Voltage	Vf	25°C	4.2	V
LED Forward Current	If	25°C	330	mA
EL Power Voltage	Vel	Vel=110Vac/400Hz		V
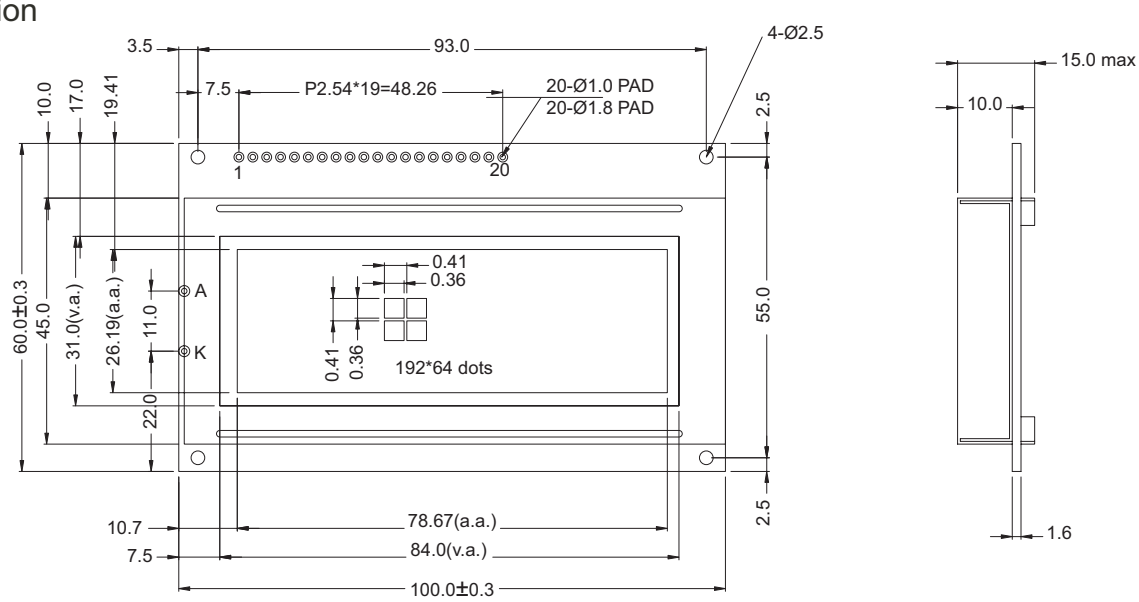
Dimension