


Plasma Panel Displays

32 Character, 16 Segment Alphanumeric Display
with .250" [6.35mm] High Characters

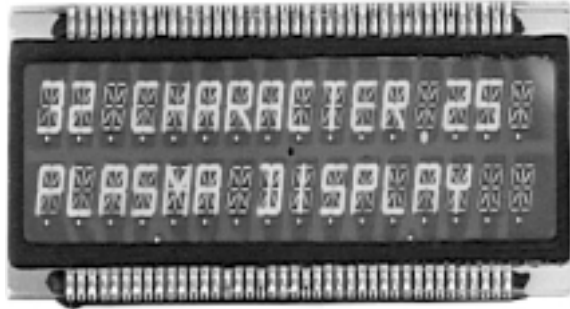

FEATURES


- 80 foot lamberts brightness
- Multiplexed operation
- Integral terminals
- Low power consumption

MAXIMUM RATINGS*


Peak Applied Voltage: 250 volts.
Operating Temperature: 0 to + 55°C.
Storage Temperature: - 55°C to + 85°.
Altitude: 70,000 feet.

*Values beyond which the life of the device may be reduced.

DIMENSIONS in inches [millimeters]

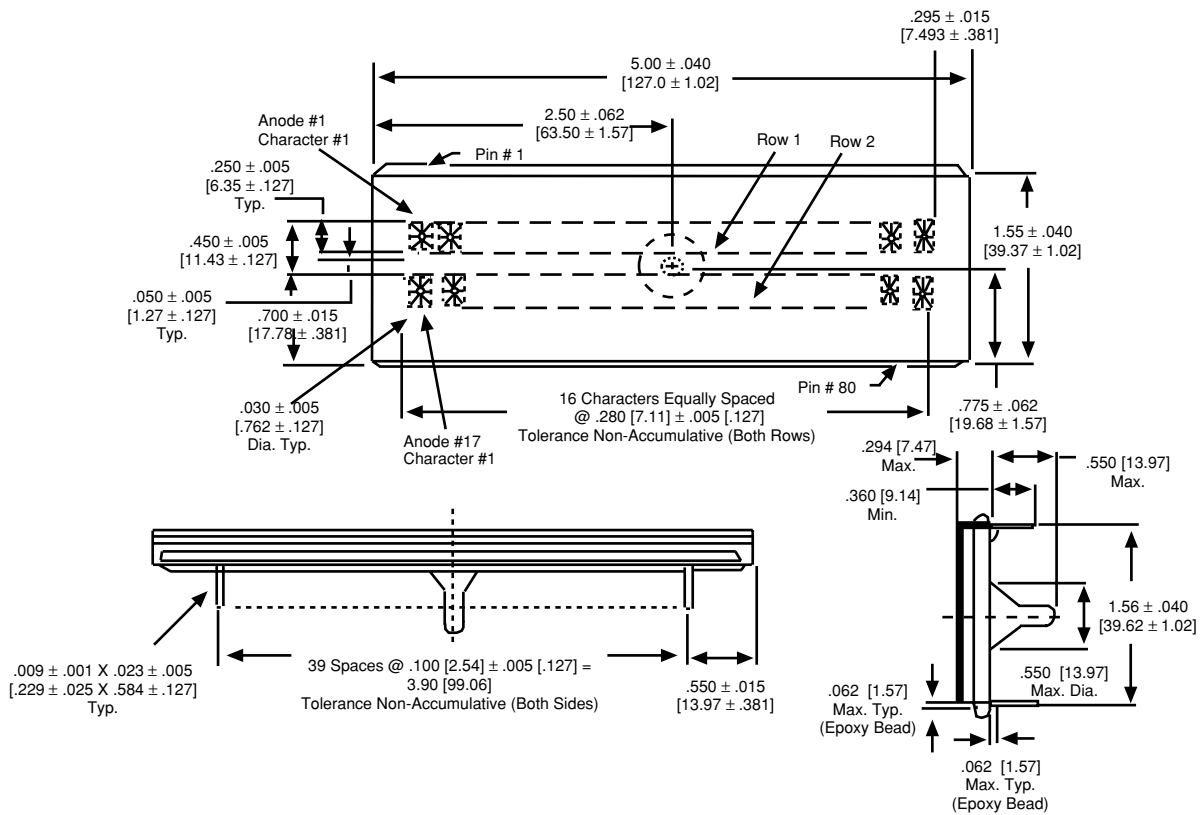

SEGMENT DESIGNATION



ORDERING INFORMATION

DESCRIPTION

Display with Integral Connector Pins

PART NUMBER

PD-32A025