



Front view of the component. The drawing shows a vertical profile with a central slot. Dimensions are indicated: a width of 1.1 at the top, a maximum width of 2.85 (MAX) for the upper section, and a maximum width of 0.5 (MAX) for the lower section. A label 'EL' points to the lower section. An arrow labeled 'FRONT' indicates the viewing direction.

DETAIL C:




25 ± 0.05

25 ± 0.05

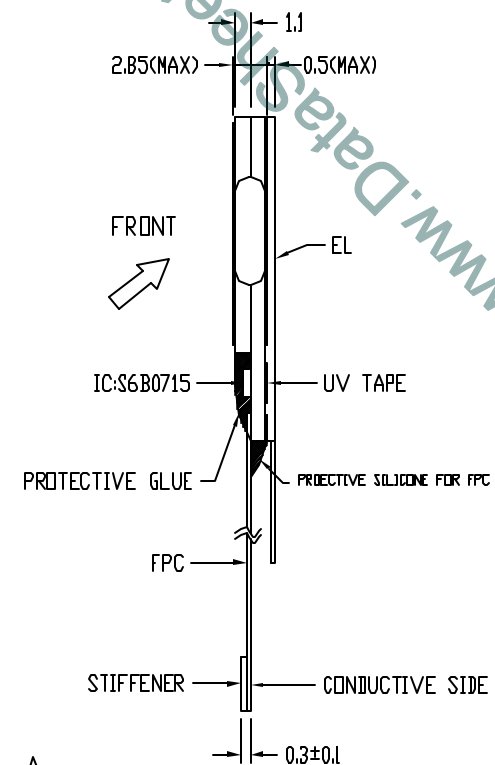

Technical drawing of a circular feature with dimensions 1.2 ± 0.04 and 1.0 ± 0.04 , and a fillet radius $R0.5$.

1. DISPLAY TYPE:	FSTN
2. VIEWING DIRECTION:	6:00
3. POLARIZER MODE:	TRANSFLECTIVE/POSITIVE
4. LOGIC VOLTAGE:	3.0V
5. LCD OPERATING VOLTAGE:	7.0V
6. DRIVE METHOD:	1/32 DUTY 1/6 BIAS
7. OPERATING TEMP.:	-20°C~+60°C
8. STORAGE TEMP.:	-30°C~+70°C
9. CONTROLLER:	S6B0715A11-B0CZ(KS0715UM-HOCC)
10. EL BACKLIGHT:	BLUE
11. UNMARKED TOLERANCES:	±0.3MM
12. CONNECTOR:	FPC



6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM10032ACBWG1		
CHECKED BY:		SCALE	
APPROVED BY:		DWG NO: G-2	UNIT: mm
CONFIRMED BY:	DWG NAME: TM003ACBWG1-G-2	SHEET	No. 1 OF 1