



NEW!

Flyback Transformers

For TI TPS23753 PoE Interface and Converter Controller



- Isolated synchronous flyback transformers developed for Texas Instruments TPS23753 for use at 125 kHz. Listed as T2 on SLVU245 for evaluation module TPS23753EVM.
- Windings optimized for hiccup overload protection
- 1500 Vrms isolation primary and bias to secondary windings

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 5.0 – 5.3 g

Ambient temperature –40°C to +125°C

Storage temperature Component: –40°C to +125°C. Packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF) 38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 200 per 13" reel Plastic tape: 44 mm wide, 0.4 mm thick, 28 mm pocket spacing, 9.6 mm pocket depth

PCB washing Only pure water or alcohol recommended

| Part number ¹ | L at 0 A ² ±10% (µH) | L at Ipk ³ min (µH) | DCR max (Ohms) | | | | Leakage L ⁵ max (µH) | | Turns ratio | | | Ipk ³ (A) | Output ⁷ | Drive output |
|--------------------------|---------------------------------|--------------------------------|----------------|------------------|-------|-------|---------------------------------|-------|----------------------|-----------|----------|----------------------|---------------------|--------------|
| | | | pri | sec ⁴ | drive | bias | pri | drive | pri:sec ⁶ | pri:drive | pri:bias | | | |
| HA3801-AL_ | 166.5 | 150.0 | 0.735 | 0.0225 | 0.510 | 0.985 | 2.50 | 0.45 | 6.5:1 | 3.7:1 | 2.0:1 | 1.2 | 3.3V, 3A | 5.6V, 10 mA |
| HA3802-AL_ | 150.0 | 135.0 | 0.520 | 0.0275 | 0.525 | 0.770 | 2.00 | 0.40 | 5.0:1 | 3.2:1 | 2.25:1 | 1.2 | 5.0V, 2A | 7.5V, 10 mA |
| HA3803-AL_ | 166.5 | 150.0 | 0.760 | 0.101 | 0.500 | 1.10 | 2.05 | 0.245 | 2.0:1 | 4.0:1 | 2.0:1 | 1.2 | 12V, 0.83A | 6.0V, 10 mA |

1. When ordering, please specify **packaging** code:

HA3803-AL D

Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (200 per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Inductance is for the primary, measured at 100 kHz, 0.1 Vrms.

3. Peak primary current drawn at minimum input voltage.

4. DCR for secondary is with windings connected in parallel.




5. Leakage inductance for the primary is with the secondary and drive windings shorted; leakage inductance for the drive winding is with the secondary windings shorted.

6. Turns ratio is with both secondary windings connected in parallel.

7. Output of the secondary is with the windings connected in parallel. 10 W output from 36 – 57 V PoE input or 24 V adapter; 6 W output from 12 V adapter. Bias winding output is 10 V, 20 mA.

8. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

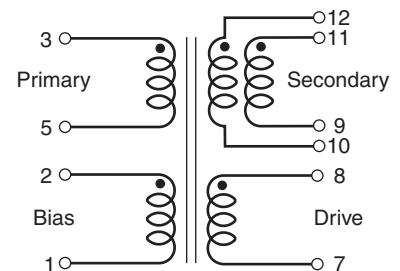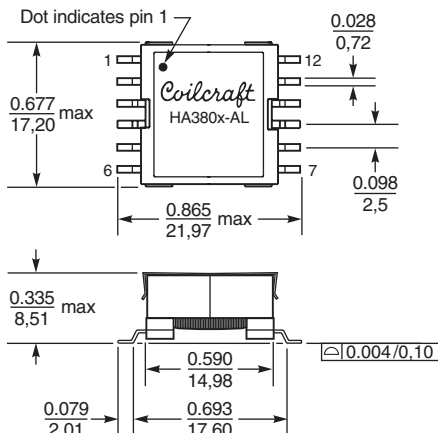

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



Specifications subject to change without notice. Please check our website for latest information.

Document 696 Revised 10/28/08

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>