


Series

Display Format	20 Characters X 4 Lines
Drive Method	1/16 Duty , 1/5 Bias
LCD Type	STN Blue
LED Backlight	White
Viewing direction	6 : 00
Operating Temperature	-20°C~+60°C


Electrical Characteristics

ITEM	Symbol	Condition	Standard value			UNIT
			Min.	Typ.	Max.	
Supply Voltage For Logic	$V_{DD}-V_{SS}$	—	4.5	5.0	5.5	V
Supply Voltage For LCD	$V_{DD}-V_0$	—	—	4.7	—	V
Input High Voltage	V_{IH}	—	2.2	—	V_{DD}	V
Input Low Voltage	V_{IL}	—	-0.3	—	0.6	V
output High Voltage	V_{OH}	$-I_{OH}=0.2mA$	2.4	—	—	V
output Low Voltage	V_{OL}	$I_{OL}=1.2mA$	—	—	0.4	V
Power Supply Current	V_{DD}	$V_{DD}=5.0V$	—	2.0	5	mA
With B/L	I_{LED}	$V_{LED}=5.0V$	—	72	80	mA

Power supply

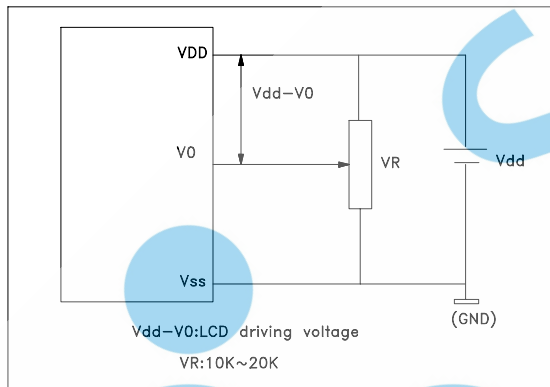

Block Diagram

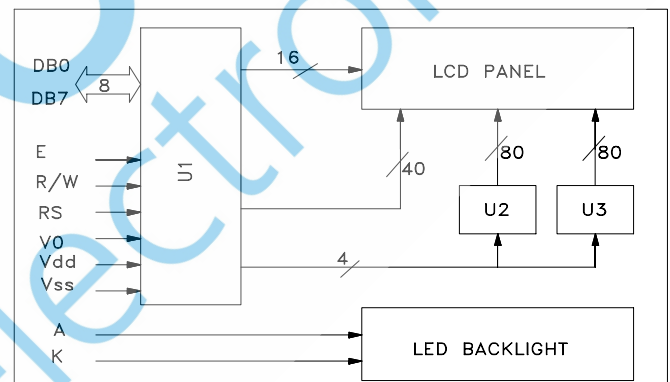

EXTERNAL DIMENSIONS AND DISPLAY PATTERN

