

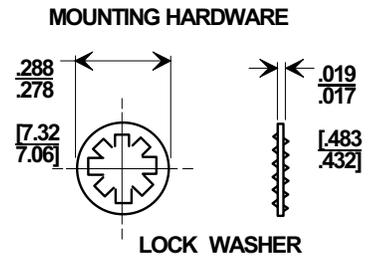
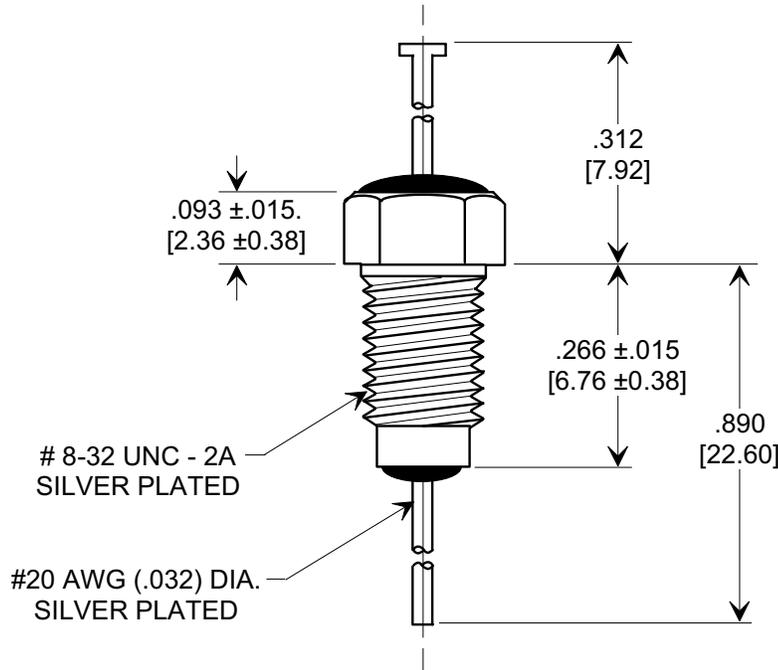
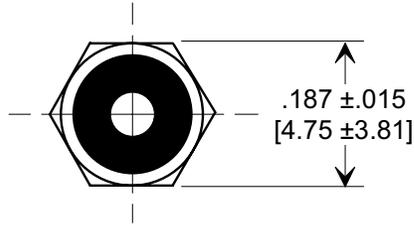



**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.



- NOTE:  
 1. SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.  
 2. MOUNTING TORQUE NOT TO EXCEED 3 lb-in.

MIN. CAP (pF)	WORKING VOLTAGE		CURRENT	MINIMUM NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220			
	85°C	125°C		200 MHz	300 MHz	1 GHz	10 GHz
1500	200	100	10A	50	50	50	50

X-2015 Rev-0 <b>REVISION RECORD</b> Original Release C.O. 20030505-1-01 0	--TOLERANCES-- Unless Otherwise Specified		Title <b>MIL-15733/43-0002</b> <b>BUSHING STYLE</b> <b>EMI FILTER</b>	
	DECIMAL ± .031 [0.79]		Drawn S.M. 05-05-03      Scale 4 X	
	ANGLES ±		Approved T.C. 05-05-03	
	<b>TUSONIX</b> TUCSON, ARIZONA		<b>A</b>	<b>4201-505</b>