

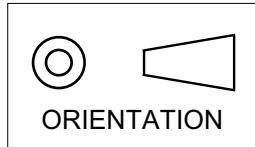


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

This drawing is the property of
 Tusonix, Inc., and may not be
 used, reproduced, published or
 disclosed to others without ex-
 pressed authorization by Tusonix Inc.

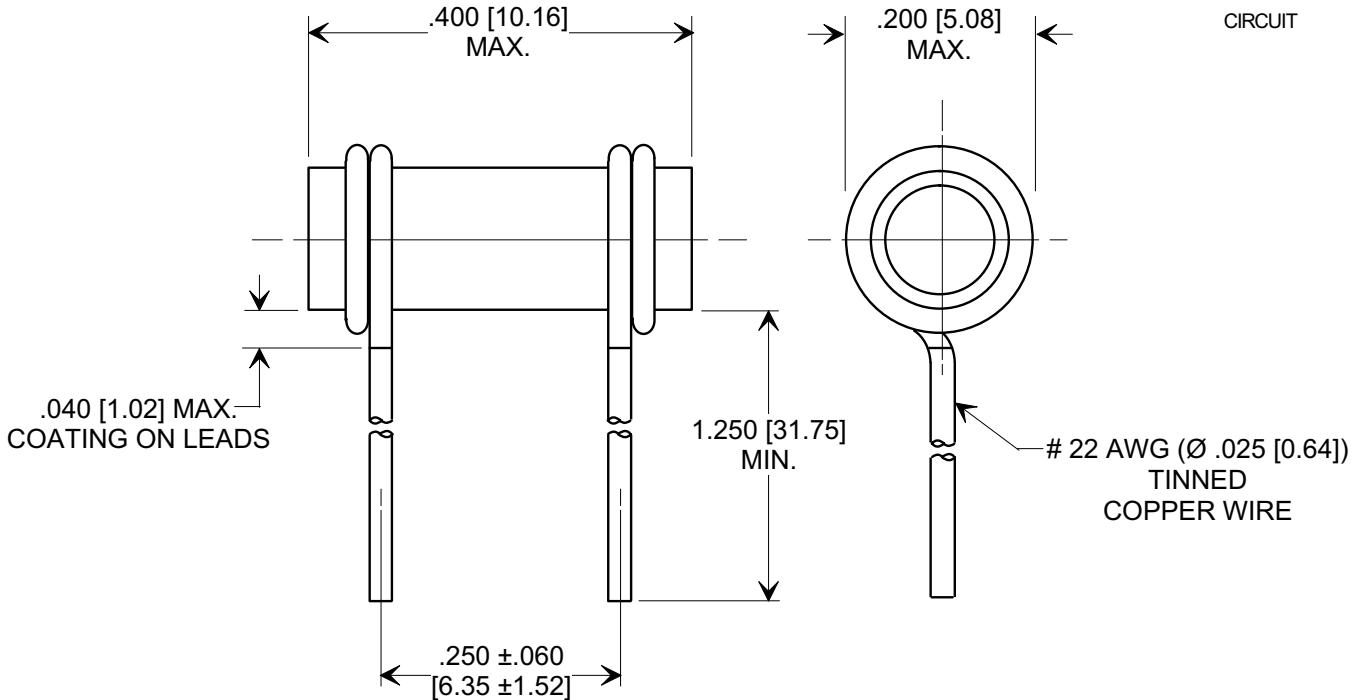

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



SPECIFICATIONS

Tusonix Style:	301-086	
Value:	36 pF	
Value Tol.:	± 5 %	
Temp. Coef.:	S2H	
Operating Range:	-55°C TO 85°C	
IR Min @ 100vdc	50 GΩ	
Voltage	Working:	500 VDC
	Test:	1500 VDC
	Life:	1000 VDC
Marking:	STANDARD COLOR CODE	

NOTE:
 CLEAR LAQUER COATING

REVISION RECORD			--TOLERANCES-- Unless Otherwise Specified	Title
	C.O.	DATE		
Original Release	20000204-4-01	0		LAQUER COATED TUBULAR CAPACITOR
SPECIFICATIONS TABLE				
REVISED L.E. 07-30-03				
20030728-5-03	1		DECIMAL ± / / / /	Drawn S.M. 02-07-00 Scale 5 X
CLEAR LAQUER WAS WHITE, S.M. 05-17-06			ANGLES ± / / / /	Approved T.C. 02-07-00
20060406-4-07	2			
TUSONIX TUCSON, ARIZONA	A	301-086-S2H0-360J		