

---

# HM5112805 Series, HM5113805 Series

128M EDO DRAM (16-Mword × 8-bit)  
8k refresh/4k refresh

## HITACHI

ADE-203-839C (Z)  
Rev. 2.0  
Jul. 10, 1998

---

### Description

The Hitachi HM5112805 Series, HM5113805 Series are 128M-bit dynamic RAMs organized as 16,777,216-word × 8-bit. They have realized high performance and low power by employing CMOS process technology. HM5112805 Series, HM5113805 Series offer Extended Data Out (EDO) Page Mode as a high speed access mode. They are packaged in 32-pin plastic TSOPII.

### Features

- Single 3.3 V supply: 3.3 V ± 0.3 V
- Access time: 60 ns (max)
- Power dissipation
  - Active: 720 mW (max) (HM5112805 Series)  
792 mW (max) (HM5113805 Series)
  - Standby: 3.6 mW (max) (CMOS interface)  
1.8 mW (max) (CMOS interface) (L-version)
- EDO page mode capability
- Refresh cycles
  - $\overline{\text{RAS}}$ -only refresh
    - 8192 cycles/64 ms (HM5112805 Series)
    - 4096 cycles/64 ms (HM5113805 Series)
  - CBR/Hidden refresh
    - 4096 cycles/64 ms (HM5112805 Series, HM5113805 Series)

---

## HM5112805 Series, HM5113805 Series

---

- 4 variations of refresh
  - $\overline{\text{RAS}}$ -only refresh
  - $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$  refresh
  - Hidden refresh
  - Self refresh (L-version)
- Battery backup operation (L-version)


### Ordering Information

Type No.	Access time	Package
HM5112805TD-6	60 ns	400-mil 32-pin plastic TSOP II (TTP-32DF)
HM5112805LTD-6	60 ns	
HM5113805TD-6	60 ns	
HM5113805LTD-6	60 ns	

---

## HM5112805 Series, HM5113805 Series

### Pin Arrangement (HM5112805 Series)

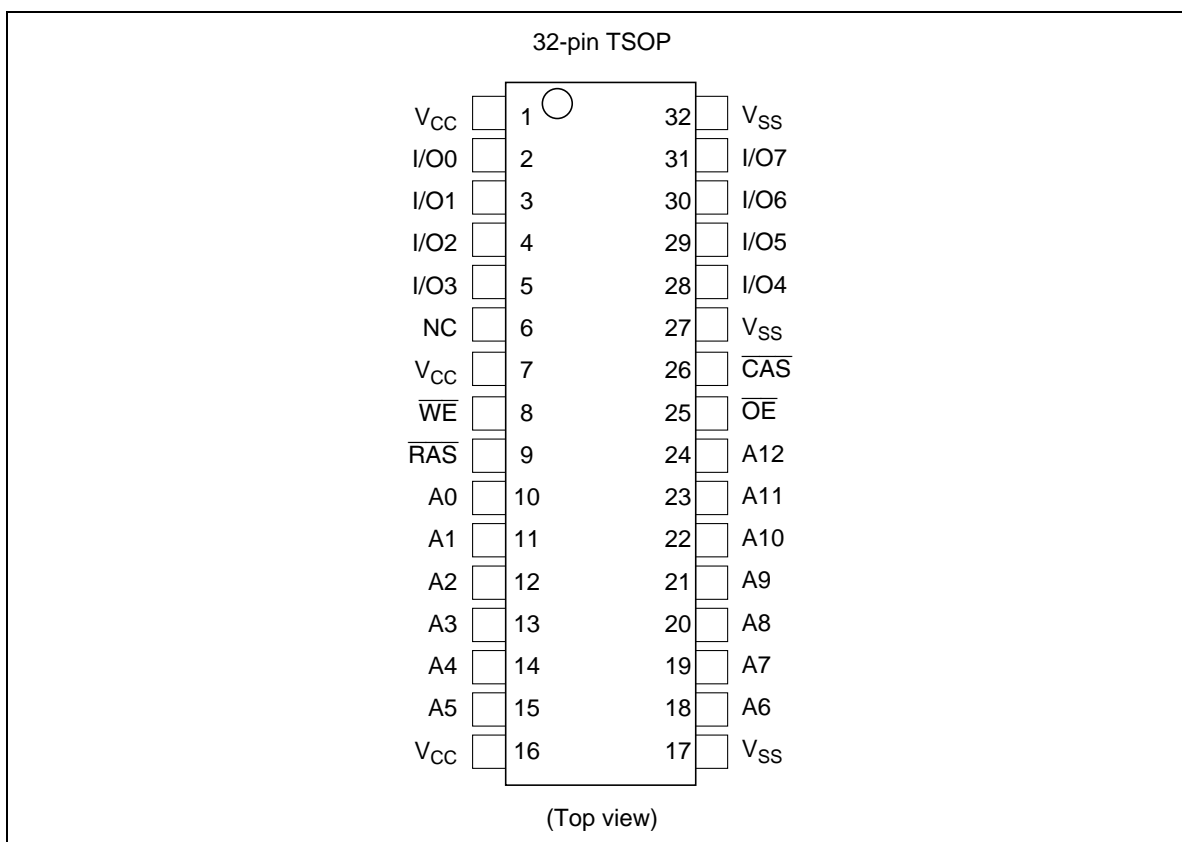


### Pin Description

Pin name	Function
A0 to A12	Address input <ul style="list-style-type: none"> <li>• Row/Refresh address      A0 to A12</li> <li>• Column address            A0 to A10</li> </ul>
I/O0 to I/O7	Data input/output
$\overline{\text{RAS}}$	Row address strobe
$\overline{\text{CAS}}$	Column address strobe
$\overline{\text{WE}}$	Write enable
$\overline{\text{OE}}$	Output enable
$V_{\text{cc}}$	Power supply
$V_{\text{ss}}$	Ground
NC	No connection

## HM5112805 Series, HM5113805 Series

### Pin Arrangement (HM5113805 Series)

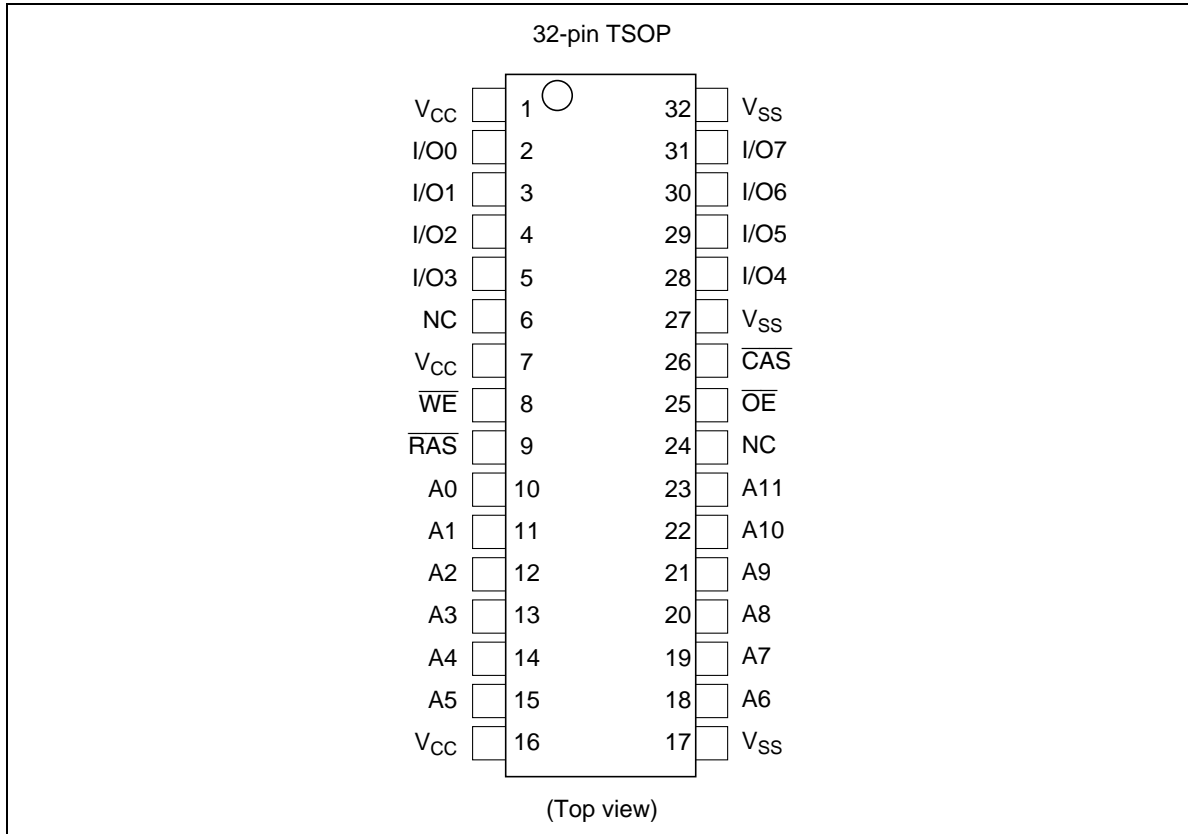


### Pin Description

Pin name	Function
A0 to A11	Address input <ul style="list-style-type: none"> <li>• Row/Refresh address      A0 to A11</li> <li>• Column address            A0 to A11</li> </ul>
I/O0 to I/O7	Data input/output
$\overline{\text{RAS}}$	Row address strobe
$\overline{\text{CAS}}$	Column address strobe
$\overline{\text{WE}}$	Write enable
$\overline{\text{OE}}$	Output enable
$V_{\text{cc}}$	Power supply
$V_{\text{ss}}$	Ground
NC	No connection


# HM5112805 Series, HM5113805 Series

## Block Diagram (HM5112805 Series)

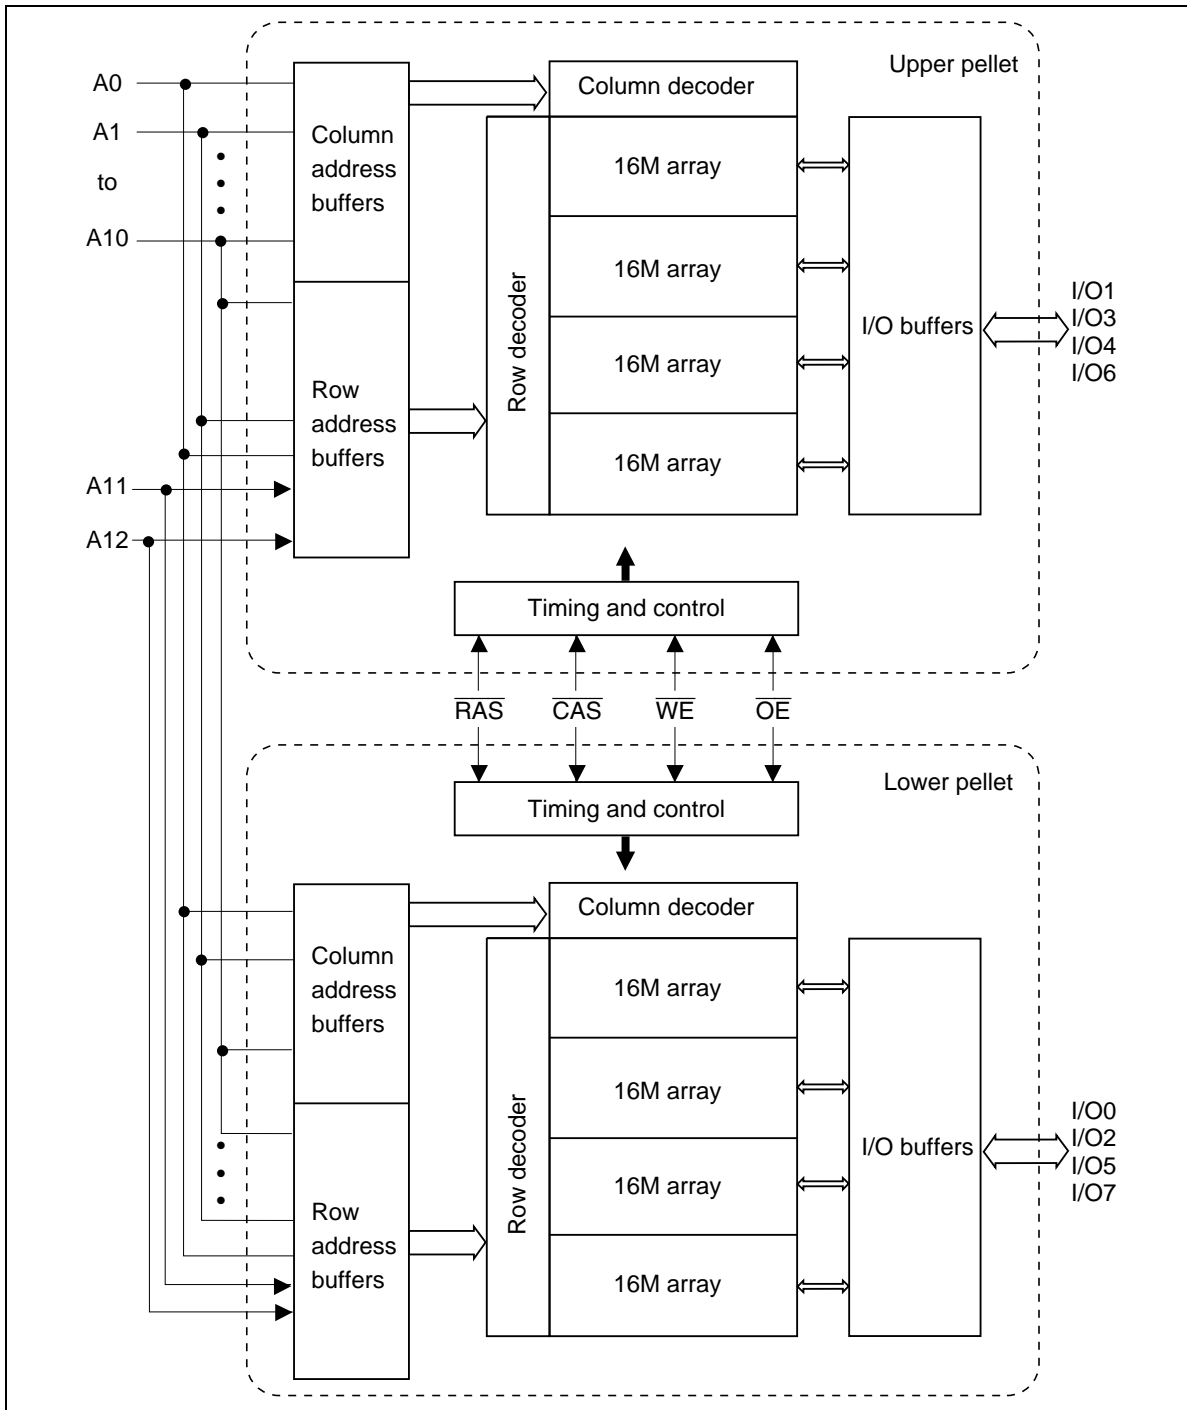

# HM5112805 Series, HM5113805 Series

## Block Diagram (HM5113805 Series)

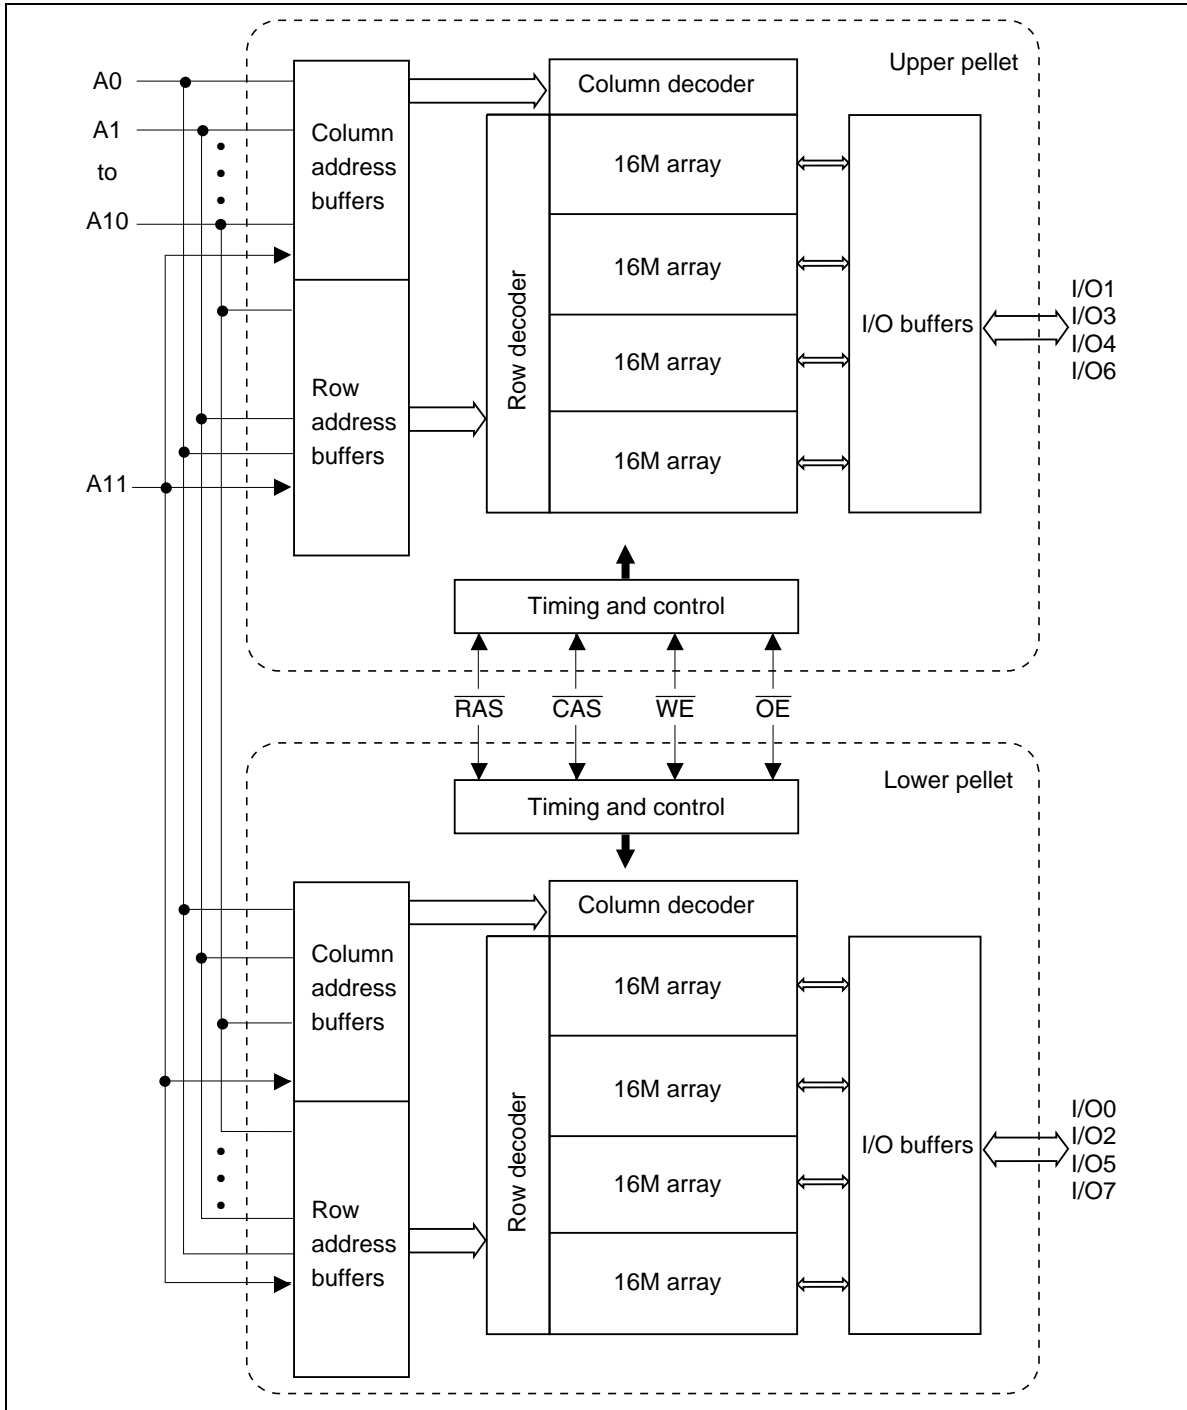

## HM5112805 Series, HM5113805 Series

### Operation Table

$\overline{\text{RAS}}$	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	$\overline{\text{OE}}$	I/O 0 to I/O 7	Operation
H	×	×	×	High-Z	Standby
L	L	H	L	Dout	Read cycle
L	L	L <sup>*2</sup>	×	Din	Early write cycle
L	L	L <sup>*2</sup>	H	Din	Delayed write cycle
L	L	H to L	L to H	Dout/Din	Read-modify-write cycle
L	H	×	×	High-Z	$\overline{\text{RAS}}$ -only refresh cycle
H to L	L	H	×	High-Z	$\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycle
L	L	H	H	High-Z	Read cycle (Output disabled)

Notes: 1. H:  $V_{\text{IH}}$  (inactive), L:  $V_{\text{IL}}$  (active), ×:  $V_{\text{IH}}$  or  $V_{\text{IL}}$

2.  $t_{\text{WCS}} \geq 0$  ns: Early write cycle

$t_{\text{WCS}} < 0$  ns: Delayed write cycle

### Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Terminal voltage on any pin relative to $V_{\text{SS}}$	$V_{\text{T}}$	-0.5 to $V_{\text{CC}} + 0.5$ ( $\leq 4.6$ V (max))	V
Power supply voltage relative to $V_{\text{SS}}$	$V_{\text{CC}}$	-0.5 to +4.6	V
Short circuit output current	$I_{\text{out}}$	50	mA
Power dissipation	$P_{\text{T}}$	1.0	W
Storage temperature	Tstg	-55 to +125	°C

### DC Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Supply voltage	$V_{\text{CC}}$	3.0	3.3	3.6	V	1, 2
	$V_{\text{SS}}$	0	0	0	V	2
Input high voltage	$V_{\text{IH}}$	2.0	—	$V_{\text{CC}} + 0.3$	V	1
Input low voltage	$V_{\text{IL}}$	-0.3	—	0.8	V	1
Ambient temperature range	Ta	0	—	70	°C	

Notes: 1. All voltage referred to  $V_{\text{SS}}$ .

2. The supply voltage with all  $V_{\text{CC}}$  pins must be on the same level. The supply voltage with all  $V_{\text{SS}}$  pins must be on the same level.

## HM5112805 Series, HM5113805 Series

### DC Characteristics (HM5112805 Series)

Parameter	Symbol	HM5112805		Unit	Test conditions
		Min	Max		
Operating current* <sup>1, *2</sup>	$I_{CC1}$	—	200	mA	$t_{RC} = \text{min}$
Standby current	$I_{CC2}$	—	4	mA	TTL interface $\overline{RAS}, \overline{CAS} = V_{IH}$ Dout = High-Z
		—	1	mA	CMOS interface $\overline{RAS}, \overline{CAS} \geq V_{CC} - 0.2 \text{ V}$ Dout = High-Z
Standby current (L-version)	$I_{CC2}$	—	500	$\mu\text{A}$	CMOS interface $\overline{RAS}, \overline{CAS} \geq V_{CC} - 0.2 \text{ V}$ Dout = High-Z
$\overline{RAS}$ -only refresh current* <sup>2</sup>	$I_{CC3}$	—	200	mA	$t_{RC} = \text{min}$
Standby current* <sup>1</sup>	$I_{CC5}$	—	10	mA	$\overline{RAS} = V_{IH}, \overline{CAS} = V_{IL}$ Dout = enable
$\overline{CAS}$ -before- $\overline{RAS}$ refresh current	$I_{CC6}$	—	200	mA	$t_{RC} = \text{min}$
EDO page mode current* <sup>1, *3</sup>	$I_{CC7}$	—	200	mA	$\overline{RAS} = V_{IL}, \overline{CAS}$ cycle, $t_{HPC} = t_{HPC} \text{ min}$
Battery backup current* <sup>4</sup> (Standby with CBR refresh) (L-version)	$I_{CC10}$	—	2	mA	CMOS interface Dout = High-Z CBR refresh: $t_{RC} = 15.6 \mu\text{s}$ $t_{RAS} \leq 0.3 \mu\text{s}$
Self refresh mode current (L-version)	$I_{CC11}$	—	1.6	mA	CMOS interface $\overline{RAS}, \overline{CAS} \leq 0.2 \text{ V}$ Dout = High-Z
Input leakage current	$I_{LI}$	-5	5	$\mu\text{A}$	$0 \text{ V} \leq V_{in} \leq V_{CC} + 0.3 \text{ V}$
Output leakage current	$I_{LO}$	-5	5	$\mu\text{A}$	$0 \text{ V} \leq V_{out} \leq V_{CC}$ Dout = disable
Output high voltage	$V_{OH}$	2.4	$V_{CC}$	V	High Iout = -2 mA
Output low voltage	$V_{OL}$	0	0.4	V	Low Iout = 2 mA

Notes: 1.  $I_{CC}$  depends on output load condition when the device is selected.  $I_{CC}$  max is specified at the output open condition.

2. Address can be changed once or less while  $\overline{RAS} = V_{IL}$ .

3. Measured with one sequential address change per EDO cycle,  $t_{HPC}$ .

4.  $V_{IH} \geq V_{CC} - 0.2 \text{ V}$ ,  $0 \text{ V} \leq V_{IL} \leq 0.2 \text{ V}$ .



## HM5112805 Series, HM5113805 Series

### DC Characteristics (HM5113805 Series)

Parameter	Symbol	HM5113805		Unit	Test conditions
		Min	Max		
Operating current* <sup>1, *2</sup>	$I_{CC1}$	—	220	mA	$t_{RC} = \text{min}$
Standby current	$I_{CC2}$	—	4	mA	TTL interface $\overline{RAS}, \overline{CAS} = V_{IH}$ Dout = High-Z
		—	1	mA	CMOS interface $\overline{RAS}, \overline{CAS} \geq V_{CC} - 0.2 \text{ V}$ Dout = High-Z
Standby current (L-version)	$I_{CC2}$	—	500	$\mu\text{A}$	CMOS interface $\overline{RAS}, \overline{CAS} \geq V_{CC} - 0.2 \text{ V}$ Dout = High-Z
$\overline{RAS}$ -only refresh current* <sup>2</sup>	$I_{CC3}$	—	220	mA	$t_{RC} = \text{min}$
Standby current* <sup>1</sup>	$I_{CC5}$	—	10	mA	$\overline{RAS} = V_{IH}, \overline{CAS} = V_{IL}$ Dout = enable
$\overline{CAS}$ -before- $\overline{RAS}$ refresh current	$I_{CC6}$	—	220	mA	$t_{RC} = \text{min}$
EDO page mode current* <sup>1, *3</sup>	$I_{CC7}$	—	200	mA	$\overline{RAS} = V_{IL}, \overline{CAS}$ cycle, $t_{HPC} = t_{HPC} \text{ min}$
Battery backup current* <sup>4</sup> (Standby with CBR refresh) (L-version)	$I_{CC10}$	—	2	mA	CMOS interface Dout = High-Z CBR refresh: $t_{RC} = 15.6 \mu\text{s}$ $t_{RAS} \leq 0.3 \mu\text{s}$
Self refresh mode current (L-version)	$I_{CC11}$	—	1.6	mA	CMOS interface $\overline{RAS}, \overline{CAS} \leq 0.2 \text{ V}$ Dout = High-Z
Input leakage current	$I_{LI}$	-5	5	$\mu\text{A}$	$0 \text{ V} \leq V_{in} \leq V_{CC} + 0.3 \text{ V}$
Output leakage current	$I_{LO}$	-5	5	$\mu\text{A}$	$0 \text{ V} \leq V_{out} \leq V_{CC}$ Dout = disable
Output high voltage	$V_{OH}$	2.4	$V_{CC}$	V	High Iout = -2 mA
Output low voltage	$V_{OL}$	0	0.4	V	Low Iout = 2 mA

- Notes: 1.  $I_{CC}$  depends on output load condition when the device is selected.  $I_{CC}$  max is specified at the output open condition.
2. Address can be changed once or less while  $\overline{RAS} = V_{IL}$ .
3. Measured with one sequential address change per EDO cycle,  $t_{HPC}$ .
4.  $V_{IH} \geq V_{CC} - 0.2 \text{ V}$ ,  $0 \text{ V} \leq V_{IL} \leq 0.2 \text{ V}$ .

---

## HM5112805 Series, HM5113805 Series

---

**Capacitance** ( $T_a = 25_{\circ}C$ ,  $V_{CC} = 3.3 V \pm 0.3 V$ )

Parameter	Symbol	Typ	Max	Unit	Notes
Input capacitance (Address)	$C_{i1}$	—	7	pF	1
Input capacitance (Clocks)	$C_{i2}$	—	7	pF	1
Output capacitance (Data-in, Data-out)	$C_{iO}$	—	8	pF	1, 2

Notes : 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.

2.  $\overline{RAS}$  and  $\overline{CAS} = V_{IH}$  to disable Dout.

## HM5112805 Series, HM5113805 Series

**AC Characteristics** ( $T_a = 0$  to  $+70_{\text{C}}$ ,  $V_{\text{CC}} = 3.3 \text{ V} \pm 0.3 \text{ V}$ ,  $V_{\text{SS}} = 0 \text{ V}$ ) \*<sup>1</sup>, \*<sup>2</sup>, \*<sup>19</sup>

### Test Conditions

- Input rise and fall time: 2 ns
- Input pulse levels:  $V_{\text{IL}} = 0 \text{ V}$ ,  $V_{\text{IH}} = 3.0 \text{ V}$
- Input timing reference levels: 0.8 V, 2.0 V
- Output timing reference levels: 0.8 V, 2.0 V
- Output load: 1 TTL gate +  $C_L$  (100 pF) (Including scope and jig)

### Read, Write, Read-Modify-Write and Refresh Cycles (Common parameters)

HM5112805/HM5113805					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
Random read or write cycle time	$t_{\text{RC}}$	104	—	ns	
$\overline{\text{RAS}}$ precharge time	$t_{\text{RP}}$	40	—	ns	
$\overline{\text{CAS}}$ precharge time	$t_{\text{CP}}$	10	—	ns	
$\overline{\text{RAS}}$ pulse width	$t_{\text{RAS}}$	60	10000	ns	
$\overline{\text{CAS}}$ pulse width	$t_{\text{CAS}}$	10	10000	ns	
Row address setup time	$t_{\text{ASR}}$	0	—	ns	
Row address hold time	$t_{\text{RAH}}$	10	—	ns	
Column address setup time	$t_{\text{ASC}}$	0	—	ns	
Column address hold time	$t_{\text{CAH}}$	10	—	ns	
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay time	$t_{\text{RCD}}$	14	45	ns	3
$\overline{\text{RAS}}$ to column address delay time	$t_{\text{RAD}}$	12	30	ns	4
$\overline{\text{RAS}}$ hold time	$t_{\text{RSH}}$	15	—	ns	
$\overline{\text{CAS}}$ hold time	$t_{\text{CSH}}$	40	—	ns	
$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ precharge time	$t_{\text{CRP}}$	5	—	ns	
$\overline{\text{OE}}$ to Din delay time	$t_{\text{OED}}$	15	—	ns	5
$\overline{\text{OE}}$ delay time from Din	$t_{\text{DZO}}$	0	—	ns	6
$\overline{\text{CAS}}$ delay time from Din	$t_{\text{DZC}}$	0	—	ns	6
Transition time (rise and fall)	$t_{\text{T}}$	2	50	ns	7

## HM5112805 Series, HM5113805 Series

### Read Cycle

HM5112805/HM5113805

-6

Parameter	Symbol	Min	Max	Unit	Notes
Access time from $\overline{\text{RAS}}$	$t_{\text{RAC}}$	—	60	ns	8, 9
Access time from $\overline{\text{CAS}}$	$t_{\text{CAC}}$	—	15	ns	9, 10, 17
Access time from address	$t_{\text{AA}}$	—	30	ns	9, 11, 17
Access time from $\overline{\text{OE}}$	$t_{\text{OEA}}$	—	15	ns	9
Read command setup time	$t_{\text{RCS}}$	0	—	ns	
Read command hold time to $\overline{\text{CAS}}$	$t_{\text{RCH}}$	0	—	ns	12
Read command hold time from $\overline{\text{RAS}}$	$t_{\text{RCHR}}$	60	—	ns	
Read command hold time to $\overline{\text{RAS}}$	$t_{\text{RRH}}$	0	—	ns	12
Column address to $\overline{\text{RAS}}$ lead time	$t_{\text{RAL}}$	30	—	ns	
Column address to $\overline{\text{CAS}}$ lead time	$t_{\text{CAL}}$	18	—	ns	
$\overline{\text{CAS}}$ to output in low-Z	$t_{\text{CLZ}}$	0	—	ns	
Output data hold time	$t_{\text{OH}}$	3	—	ns	21
Output data hold time from $\overline{\text{OE}}$	$t_{\text{OHO}}$	3	—	ns	
Output buffer turn-off time	$t_{\text{OFF}}$	—	15	ns	13, 21
Output buffer turn-off to $\overline{\text{OE}}$	$t_{\text{OEZ}}$	—	15	ns	13
$\overline{\text{CAS}}$ to Din delay time	$t_{\text{CDD}}$	15	—	ns	5
Output data hold time from $\overline{\text{RAS}}$	$t_{\text{OHR}}$	3	—	ns	21
Output buffer turn-off to $\overline{\text{RAS}}$	$t_{\text{OFR}}$	—	15	ns	13, 21
Output buffer turn-off to $\overline{\text{WE}}$	$t_{\text{WEZ}}$	—	15	ns	13
$\overline{\text{WE}}$ to Din delay time	$t_{\text{WED}}$	15	—	ns	
$\overline{\text{RAS}}$ to Din delay time	$t_{\text{RDD}}$	15	—	ns	

## HM5112805 Series, HM5113805 Series

### Write Cycle

HM5112805/HM5113805

-6

Parameter	Symbol	Min	Max	Unit	Notes
Write command setup time	$t_{WCS}$	0	—	ns	14
Write command hold time	$t_{WCH}$	10	—	ns	
Write command pulse width	$t_{WCP}$	10	—	ns	
Write command to $\overline{RAS}$ lead time	$t_{RWL}$	15	—	ns	
Write command to $\overline{CAS}$ lead time	$t_{CWL}$	10	—	ns	
Data-in setup time	$t_{DS}$	0	—	ns	15
Data-in hold time	$t_{DH}$	10	—	ns	15

### Read-Modify-Write Cycle

HM5112805/HM5113805

-6

Parameter	Symbol	Min	Max	Unit	Notes
Read-modify-write cycle time	$t_{RWC}$	140	—	ns	
$\overline{RAS}$ to $\overline{WE}$ delay time	$t_{RWD}$	79	—	ns	14
$\overline{CAS}$ to $\overline{WE}$ delay time	$t_{CWD}$	34	—	ns	14
Column address to $\overline{WE}$ delay time	$t_{AWD}$	49	—	ns	14
$\overline{OE}$ hold time from $\overline{WE}$	$t_{OEH}$	15	—	ns	

### Refresh Cycle

HM5112805/HM5113805

-6

Parameter	Symbol	Min	Max	Unit	Notes
$\overline{CAS}$ setup time (CBR refresh cycle)	$t_{CSR}$	5	—	ns	
$\overline{CAS}$ hold time (CBR refresh cycle)	$t_{CHR}$	10	—	ns	
$\overline{WE}$ setup time (CBR refresh cycle)	$t_{WRP}$	0	—	ns	
$\overline{WE}$ hold time (CBR refresh cycle)	$t_{WRH}$	10	—	ns	
$\overline{RAS}$ precharge to $\overline{CAS}$ hold time	$t_{RPC}$	5	—	ns	

## HM5112805 Series, HM5113805 Series

### EDO Page Mode Cycle

HM5112805/HM5113805					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
EDO page mode cycle time	$t_{HPC}$	25	—	ns	20
EDO page mode $\overline{RAS}$ pulse width	$t_{RASP}$	—	100000	ns	16
Access time from $\overline{CAS}$ precharge	$t_{CPA}$	—	35	ns	9, 17
$\overline{RAS}$ hold time from $\overline{CAS}$ precharge	$t_{CPRH}$	35	—	ns	
Output data hold time from $\overline{CAS}$ low	$t_{DOH}$	3	—	ns	9, 22
$\overline{CAS}$ hold time referred $\overline{OE}$	$t_{COL}$	10	—	ns	
$\overline{CAS}$ to $\overline{OE}$ setup time	$t_{COP}$	5	—	ns	
Read command hold time from $\overline{CAS}$ precharge	$t_{RCHC}$	35	—	ns	
Write pulse width during $\overline{CAS}$ precharge	$t_{WPE}$	10	—	ns	
$\overline{OE}$ precharge time	$t_{OEP}$	10	—	ns	

### EDO Page Mode Read-Modify-Write Cycle

HM5112805/HM5113805					
-6					
Parameter	Symbol	Min	Max	Unit	Notes
EDO page mode read-modify-write cycle time	$t_{HPRWC}$	68	—	ns	
$\overline{WE}$ delay time from $\overline{CAS}$ precharge	$t_{CPW}$	54	—	ns	14

### Refresh(HM5112805 Series)

Parameter	Symbol	Max	Unit	Notes
Refresh period	$t_{REF}$	64	ms	8192 cycles
Refresh period (L-version)	$t_{REF}$	64	ms	8192 cycles

## HM5112805 Series, HM5113805 Series

### Refresh(HM5113805 Series)

Parameter	Symbol	Max	Unit	Notes
Refresh period	$t_{REF}$	64	ms	4096 cycles
Refresh period (L-version)	$t_{REF}$	64	ms	4096 cycles

### Self Refresh Mode (L-version)

#### HM5112805L/HM5113805L

-6

Parameter	Symbol	Min	Max	Unit	Notes
$\overline{RAS}$ pulse width (self refresh)	$t_{RASS}$	100	—	$\mu s$	25
$\overline{RAS}$ precharge time (self refresh)	$t_{RPS}$	110	—	ns	25
$\overline{CAS}$ hold time (self refresh)	$t_{CHS}$	-50	—	ns	

- Notes:
- AC measurements assume  $t_T = 2$  ns.
  - An initial pause of 200  $\mu s$  is required after power up followed by a minimum of eight initialization cycles (any combination of cycles containing  $\overline{RAS}$ -only refresh or  $\overline{CAS}$ -before- $\overline{RAS}$  refresh).
  - Operation with the  $t_{RCD}$  (max) limit insures that  $t_{RAC}$  (max) can be met,  $t_{RCD}$  (max) is specified as a reference point only; if  $t_{RCD}$  is greater than the specified  $t_{RCD}$  (max) limit, then the access time is controlled exclusively by  $t_{CAC}$ .
  - Operation with the  $t_{RAD}$  (max) limit insures that  $t_{RAC}$  (max) can be met,  $t_{RAD}$  (max) is specified as a reference point only; if  $t_{RAD}$  is greater than the specified  $t_{RAD}$  (max) limit, then access time is controlled exclusively by  $t_{AA}$ .
  - Either  $t_{OED}$  or  $t_{CDD}$  must be satisfied.
  - Either  $t_{DZO}$  or  $t_{DZC}$  must be satisfied.
  - $V_{IH}$  (min) and  $V_{IL}$  (max) are reference levels for measuring timing of input signals. Also, transition times are measured between  $V_{IH}$  (min) and  $V_{IL}$  (max).
  - Assumes that  $t_{RCD} \leq t_{RCD}$  (max) and  $t_{RAD} \leq t_{RAD}$  (max). If  $t_{RCD}$  or  $t_{RAD}$  is greater than the maximum recommended value shown in this table,  $t_{RAC}$  exceeds the value shown.
  - Measured with a load circuit equivalent to 1 TTL loads and 100 pF.
  - Assumes that  $t_{RCD} \geq t_{RCD}$  (max) and  $t_{RCD} + t_{CAC}$  (max)  $\geq t_{RAD} + t_{AA}$  (max).
  - Assumes that  $t_{RAD} \geq t_{RAD}$  (max) and  $t_{RCD} + t_{CAC}$  (max)  $\leq t_{RAD} + t_{AA}$  (max).
  - Either  $t_{RCH}$  or  $t_{RRH}$  must be satisfied for a read cycles.
  - $t_{OFF}$  (max),  $t_{OEZ}$  (max),  $t_{WEZ}$  (max) and  $t_{OFR}$  (max) define the time at which the outputs achieve the open circuit condition and are not referred to output voltage levels.
  - $t_{WCS}$ ,  $t_{RWD}$ ,  $t_{CWD}$ ,  $t_{AWD}$  and  $t_{CPW}$  are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only; if  $t_{WCS} \geq t_{WCS}$  (min), the cycle is an early write cycle and the data out pin will remain open circuit (high impedance) throughout the entire cycle; if  $t_{RWD} \geq t_{RWD}$  (min),  $t_{CWD} \geq t_{CWD}$  (min), and  $t_{AWD} \geq t_{AWD}$  (min), or  $t_{CWD} \geq t_{CWD}$  (min),  $t_{AWD} \geq t_{AWD}$  (min) and  $t_{CPW} \geq t_{CPW}$  (min), the cycle is a read-modify-write and the data output will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indeterminate.
  - $t_{DS}$  and  $t_{DH}$  are referred to  $\overline{CAS}$  leading edge in early write cycles and to  $\overline{WE}$  leading edge in delayed write or read-modify-write cycles.
  - $t_{RASP}$  defines  $\overline{RAS}$  pulse width in EDO page mode cycles.
  - Access time is determined by the longest among  $t_{AA}$ ,  $t_{CAC}$  and  $t_{CPA}$ .
  - In delayed write or read-modify-write cycles,  $\overline{OE}$  must disable output buffer prior to applying data to the device.
  - When output buffers are enabled once, sustain the low impedance state until valid data is obtained. When output buffer is turned on and off within a very short time, generally it causes large  $V_{CC}/V_{SS}$  line noise, which causes to degrade  $V_{IH}$  min/ $V_{IL}$  max level.

---

## HM5112805 Series, HM5113805 Series


---

20.  $t_{\text{HPC}}$  (min) can be achieved during a series of EDO page mode write cycles or EDO page mode read cycles. If both write and read operation are mixed in a EDO page mode  $\overline{\text{RAS}}$  cycle (EDO page mode mix cycle (1), (2)), minimum value of  $\overline{\text{CAS}}$  cycle ( $t_{\text{CAS}} + t_{\text{CP}} + 2 t_{\text{T}}$ ) becomes greater than the specified  $t_{\text{HPC}}$  (min) value. The value of  $\overline{\text{CAS}}$  cycle time of mixed EDO page mode is shown in EDO page mode mix cycle (1) and (2).
21. Data output turns off and becomes high impedance from later rising edge of  $\overline{\text{RAS}}$  and  $\overline{\text{CAS}}$ . Hold time and turn off time are specified by the timing specifications of later rising edge of  $\overline{\text{RAS}}$  and  $\overline{\text{CAS}}$  between  $t_{\text{OHR}}$  and  $t_{\text{OH}}$  and between  $t_{\text{OFR}}$  and  $t_{\text{OFF}}$ .
22.  $t_{\text{DOH}}$  defines the time at which the output level go cross.  $V_{\text{OL}} = 0.8 \text{ V}$ ,  $V_{\text{OH}} = 2.0 \text{ V}$  of output timing reference level.
23. Before and after self refresh mode, execute CBR refresh to all refresh addresses in or within 64 ms period on the condition a and b below.
  - a. Enter self refresh mode within 15.6  $\mu\text{s}$  after either burst refresh or distributed refresh at equal interval to all refresh addresses are completed.
  - b. Start burst refresh or distributed refresh at equal interval to all refresh addresses within 15.6 $\mu\text{s}$  after exiting from self refresh mode.
24. In case of entering from  $\overline{\text{RAS}}$ -only-refresh, it is necessary to execute CBR refresh before and after self refresh mode according as note 23.
25. At  $t_{\text{RASS}} > 100 \mu\text{s}$ , self refresh mode is activated, and not activated at  $t_{\text{RASS}} < 10 \mu\text{s}$ . It is undefined within the range of  $10 \mu\text{s} \leq t_{\text{RASS}} \leq 100 \mu\text{s}$ . For  $t_{\text{RASS}} \geq 10 \mu\text{s}$ , it is necessary to satisfy  $t_{\text{RPS}}$ .
26. XXX: H or L (H:  $V_{\text{IH}}(\text{min}) \leq V_{\text{IN}} \leq V_{\text{IH}}(\text{max})$ , L:  $V_{\text{IL}}(\text{min}) \leq V_{\text{IN}} \leq V_{\text{IL}}(\text{max})$ )  
/////: Invalid Dout  
When the address, clock and input pins are not described on timing waveforms, their pins must be applied  $V_{\text{IH}}$  or  $V_{\text{IL}}$ .




Timing Waveforms\*26

Read Cycle

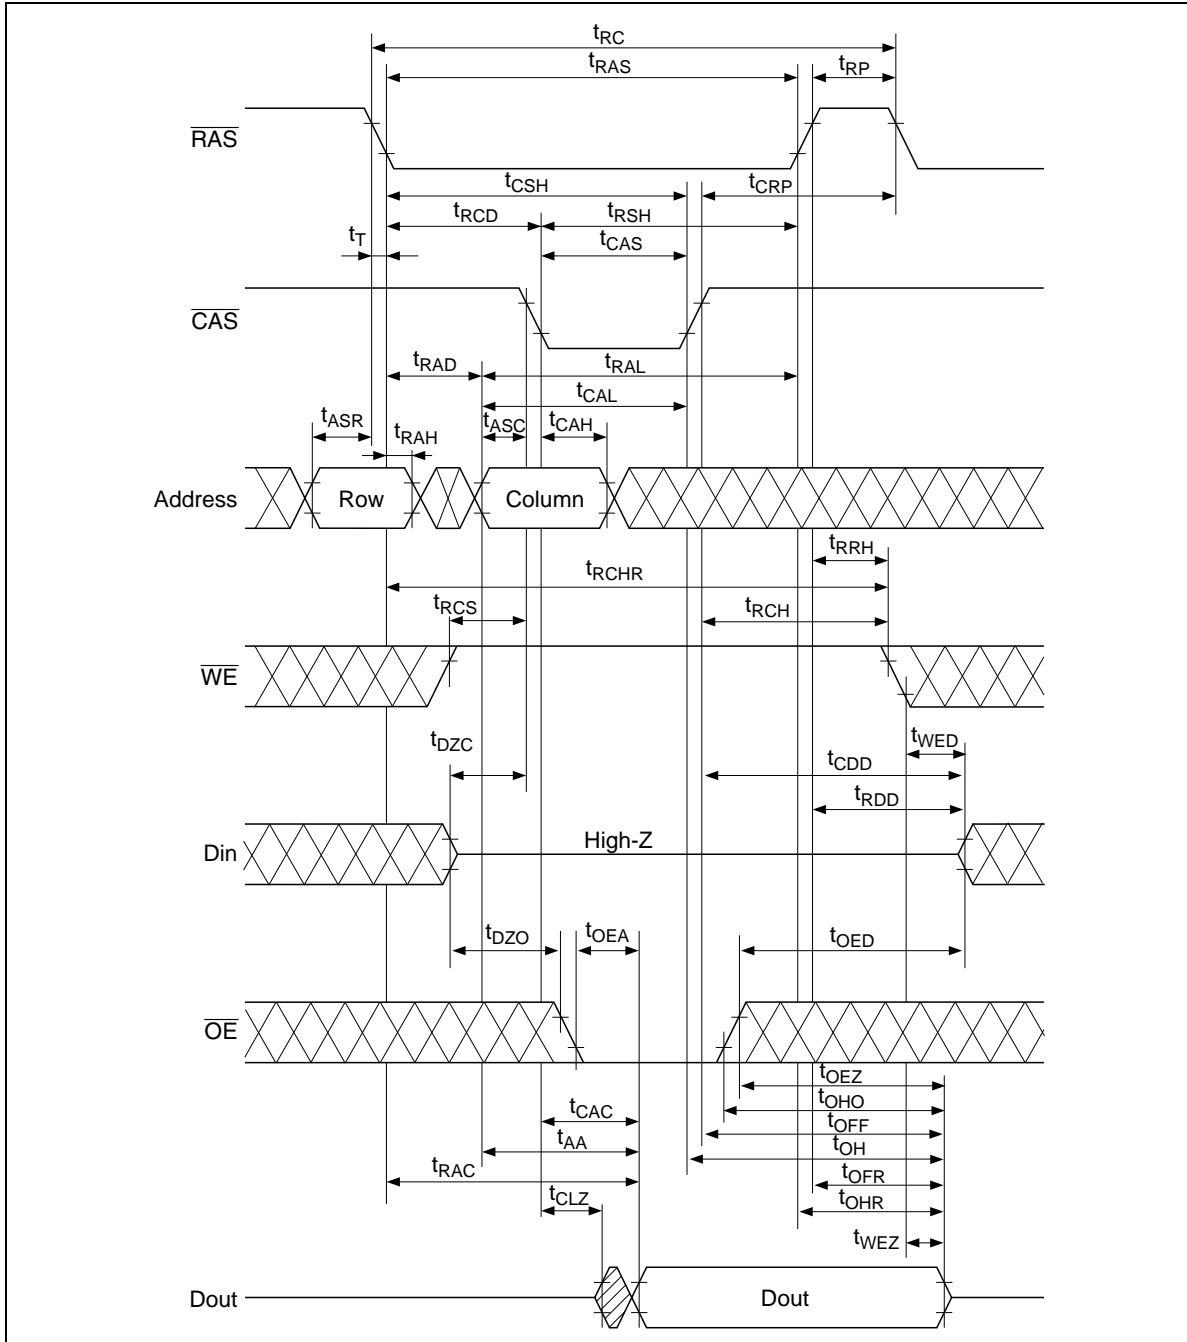


# HM5112805 Series, HM5113805 Series

## Early Write Cycle

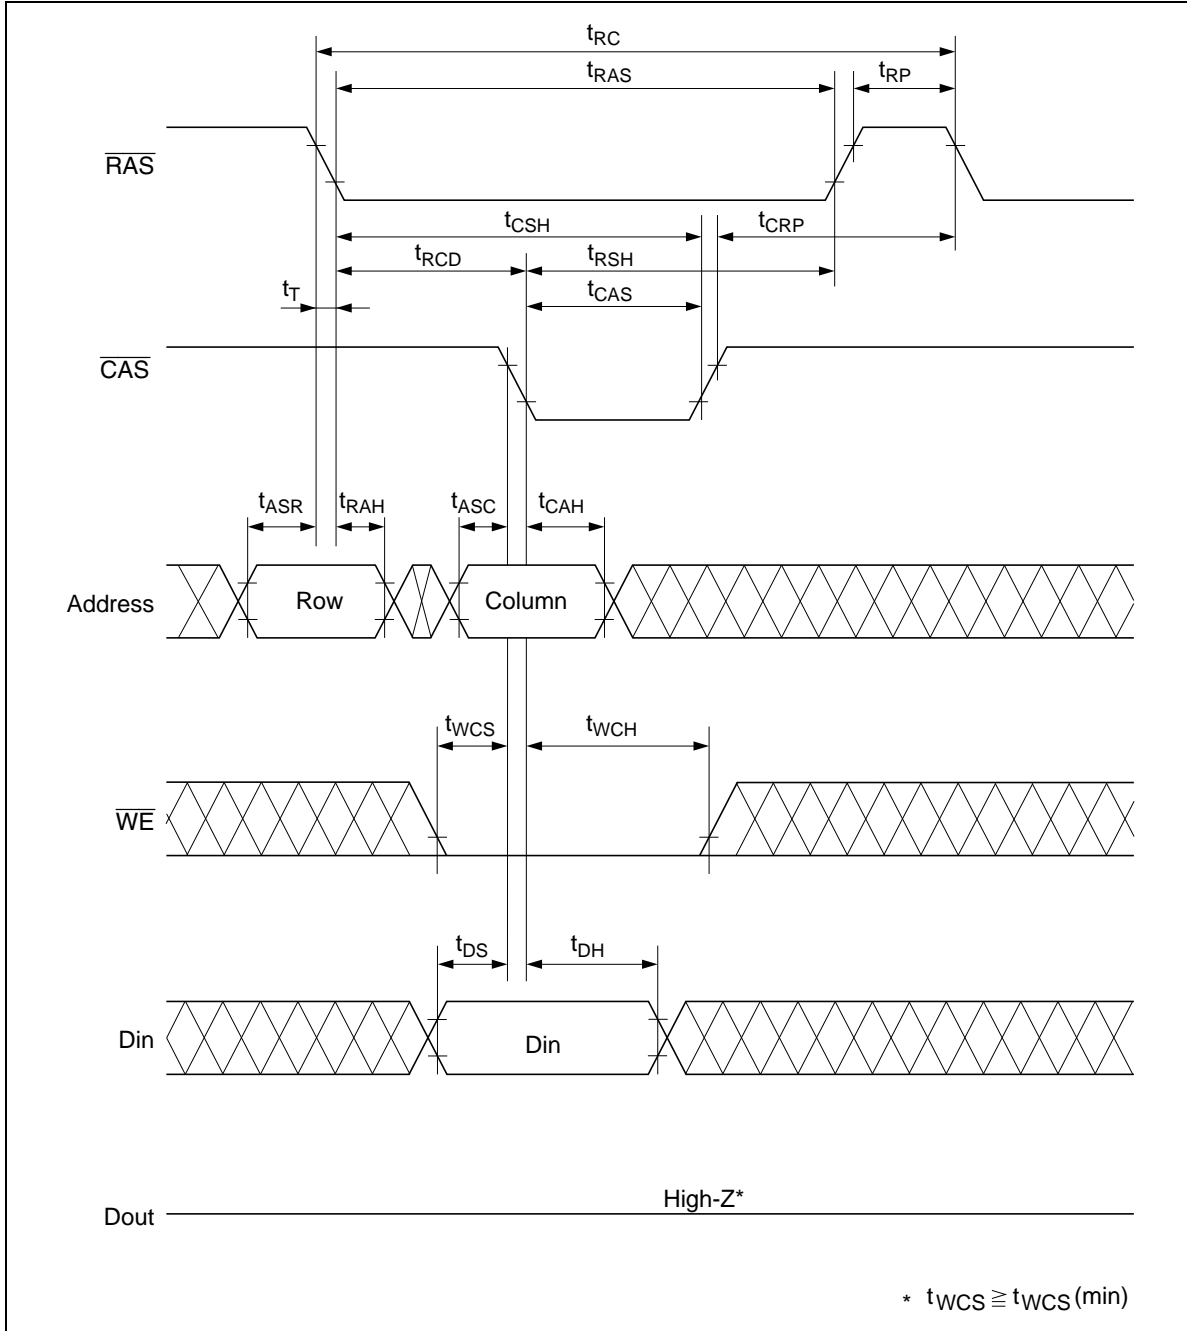


# HM5112805 Series, HM5113805 Series

## Delayed Write Cycle\*<sup>18</sup>

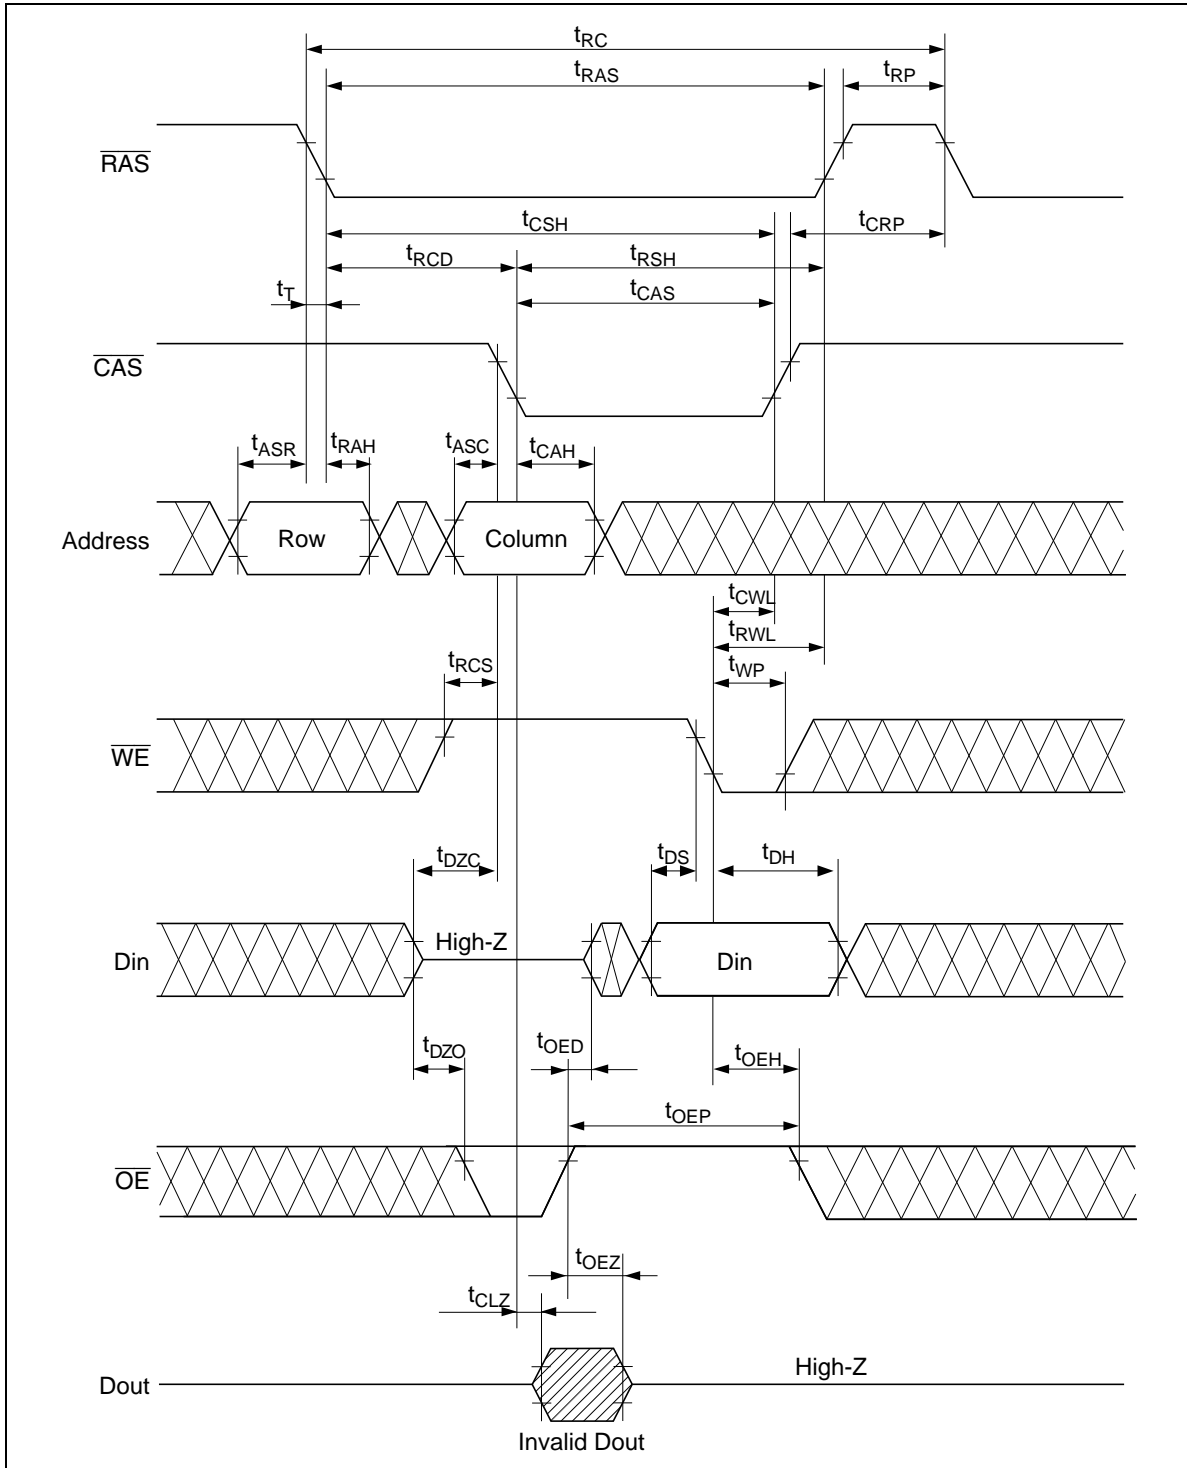


# HM5112805 Series, HM5113805 Series

## Read-Modify-Write Cycle\*18

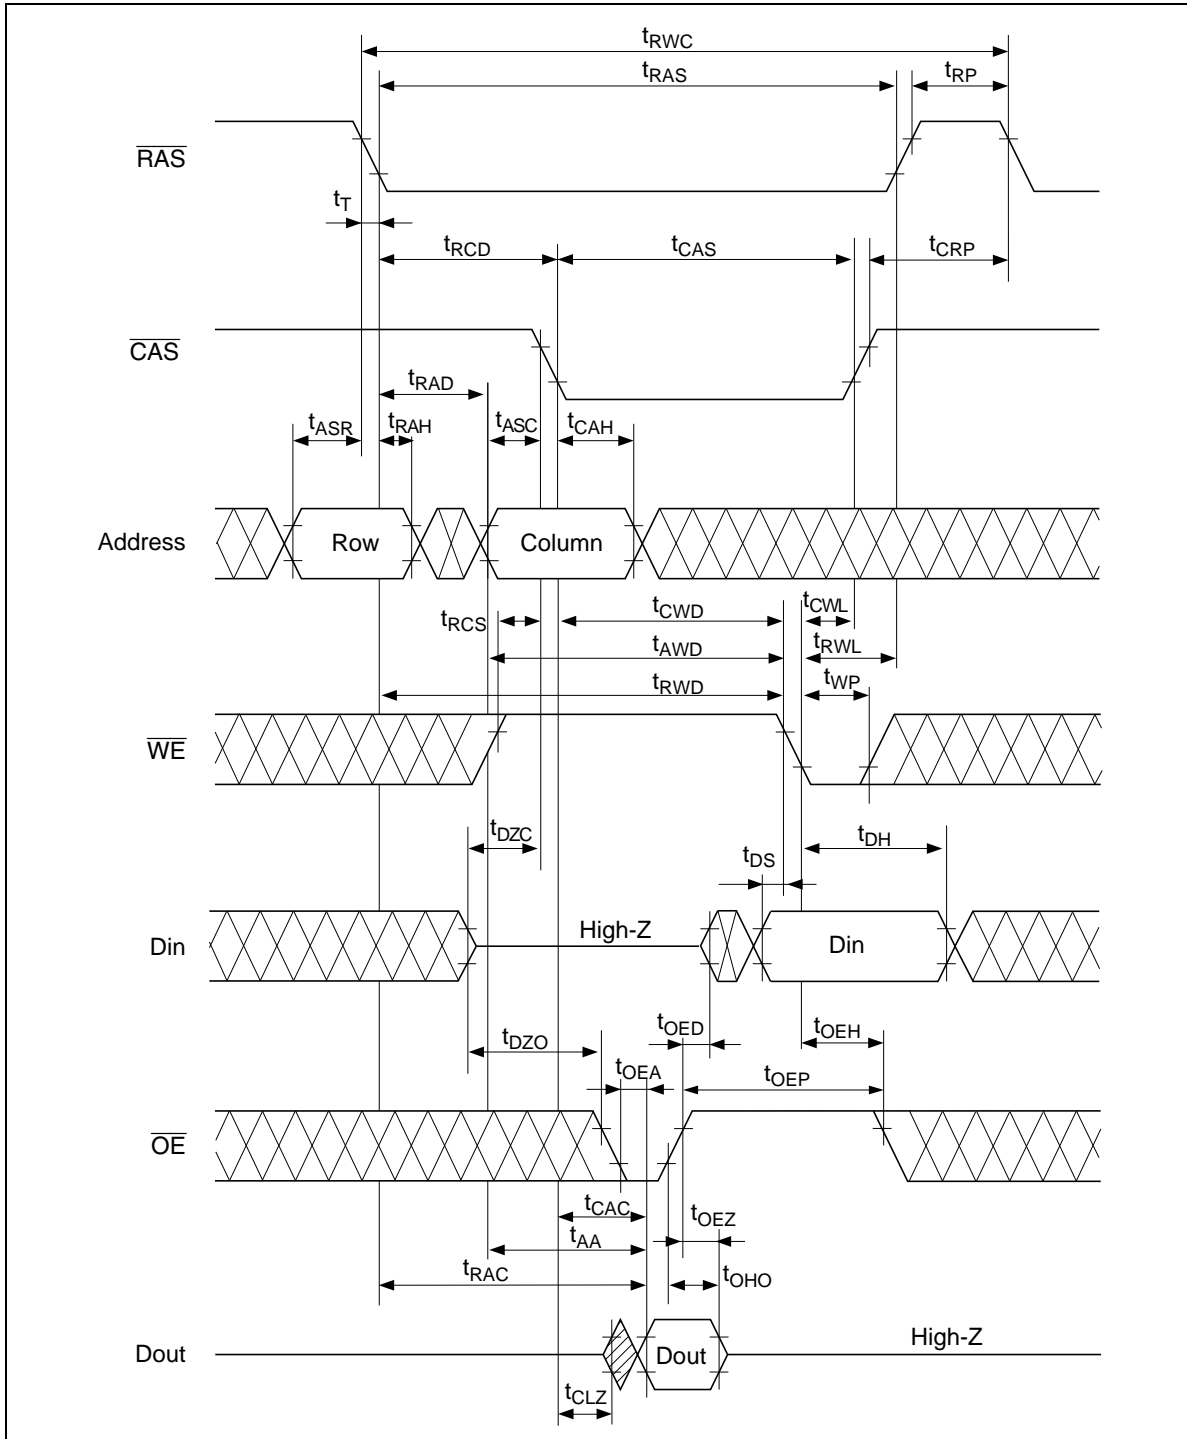


$\overline{\text{RAS}}$ -Only Refresh Cycle

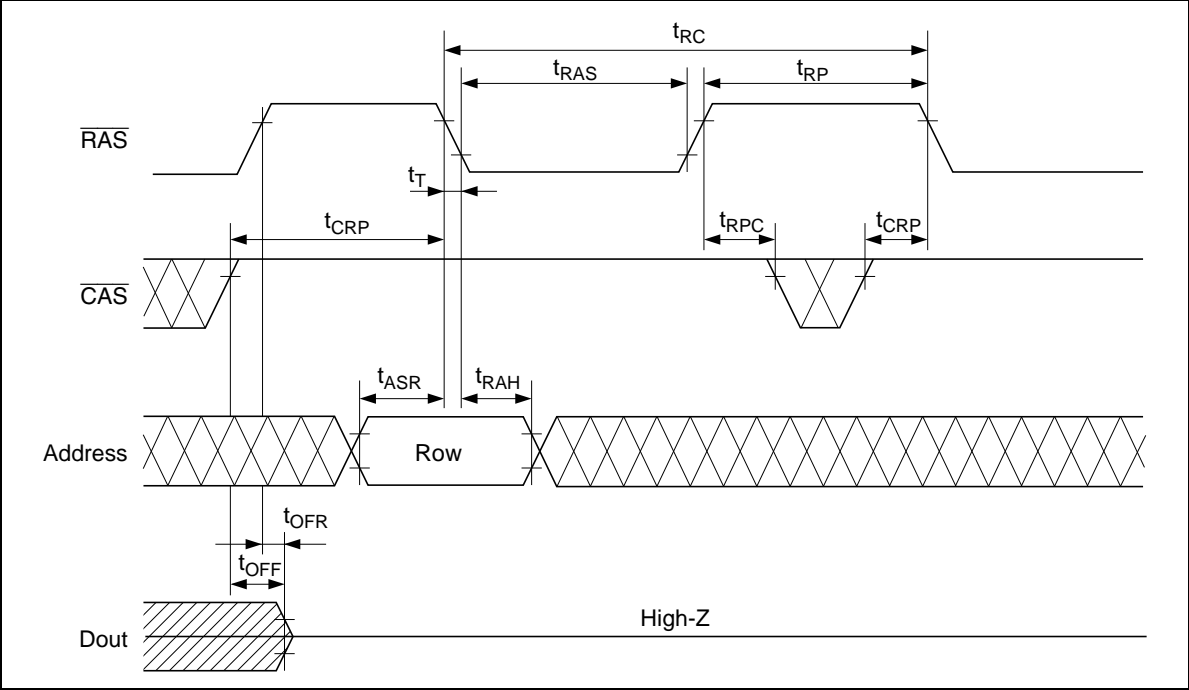


# HM5112805 Series, HM5113805 Series

## $\overline{\text{CAS}}$ -Before- $\overline{\text{RAS}}$ Refresh Cycle

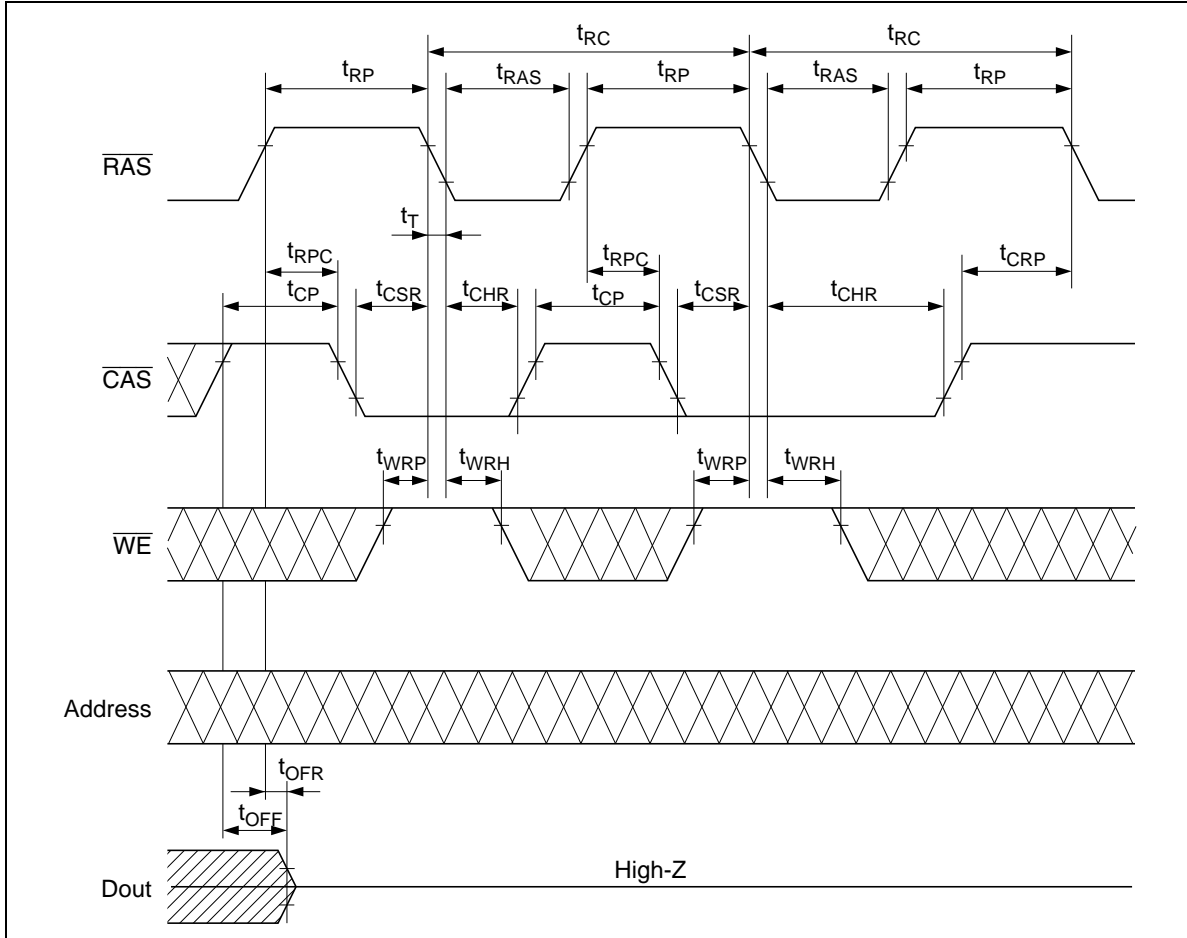


Hidden Refresh Cycle

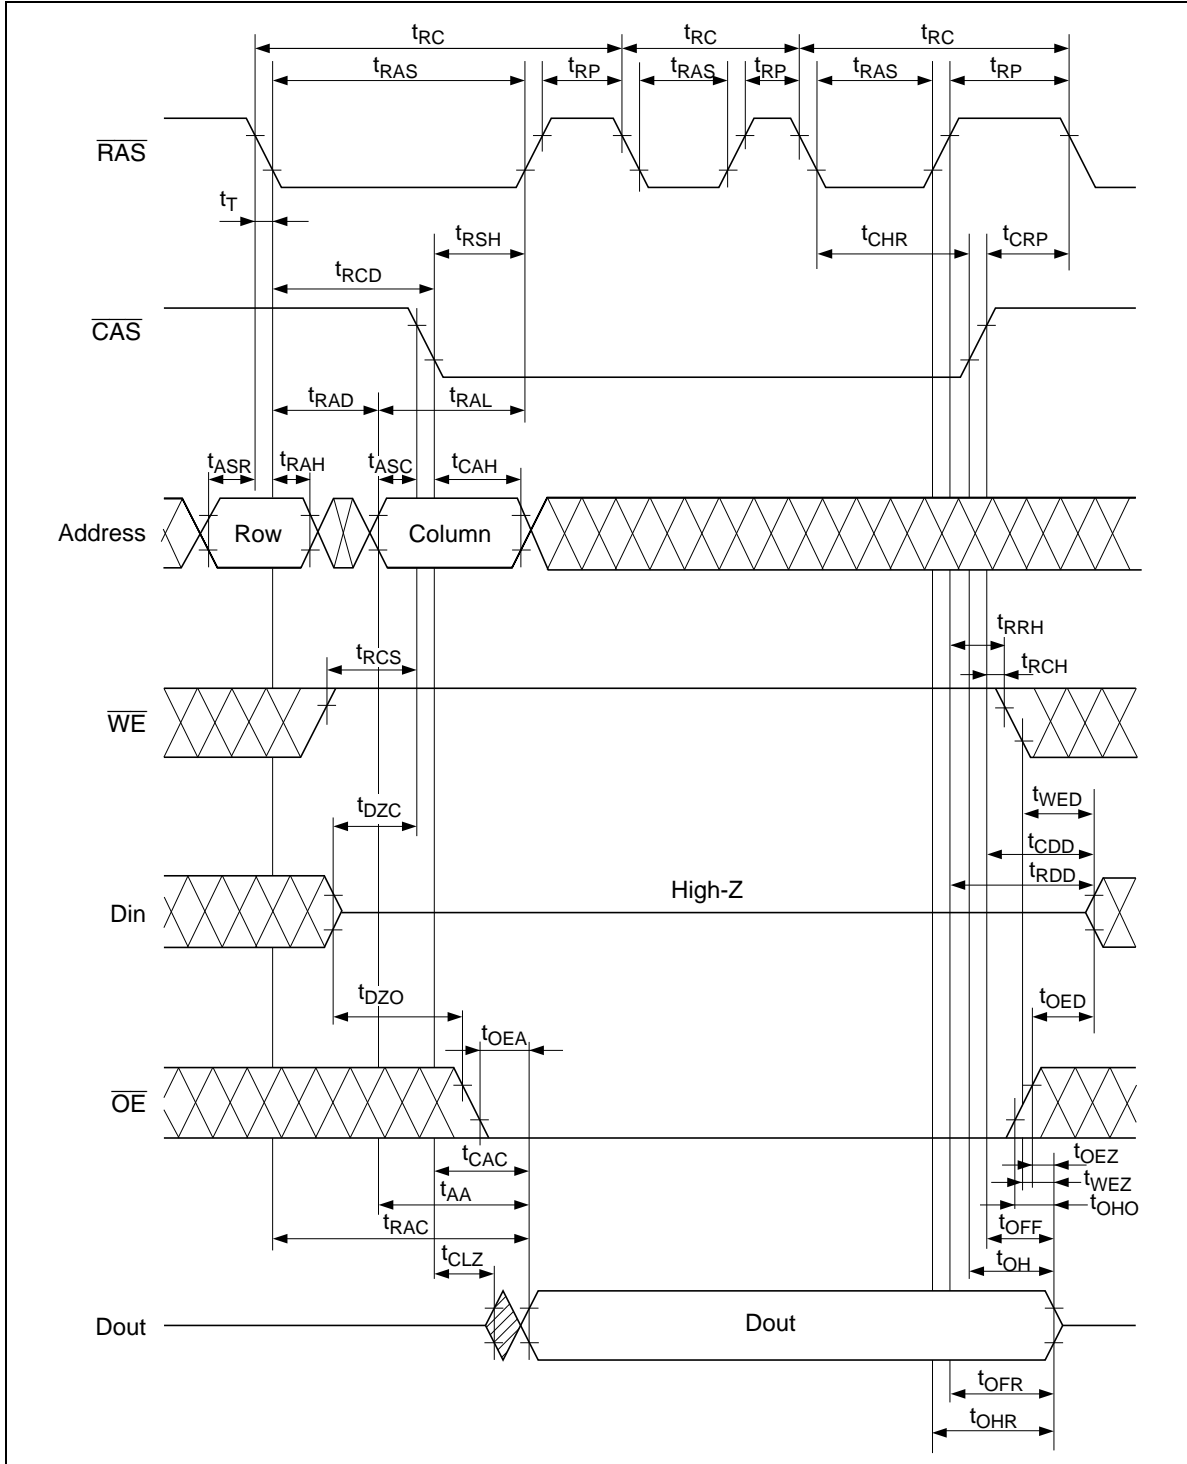

# HM5112805 Series, HM5113805 Series


## EDO Page Mode Read Cycle (1)

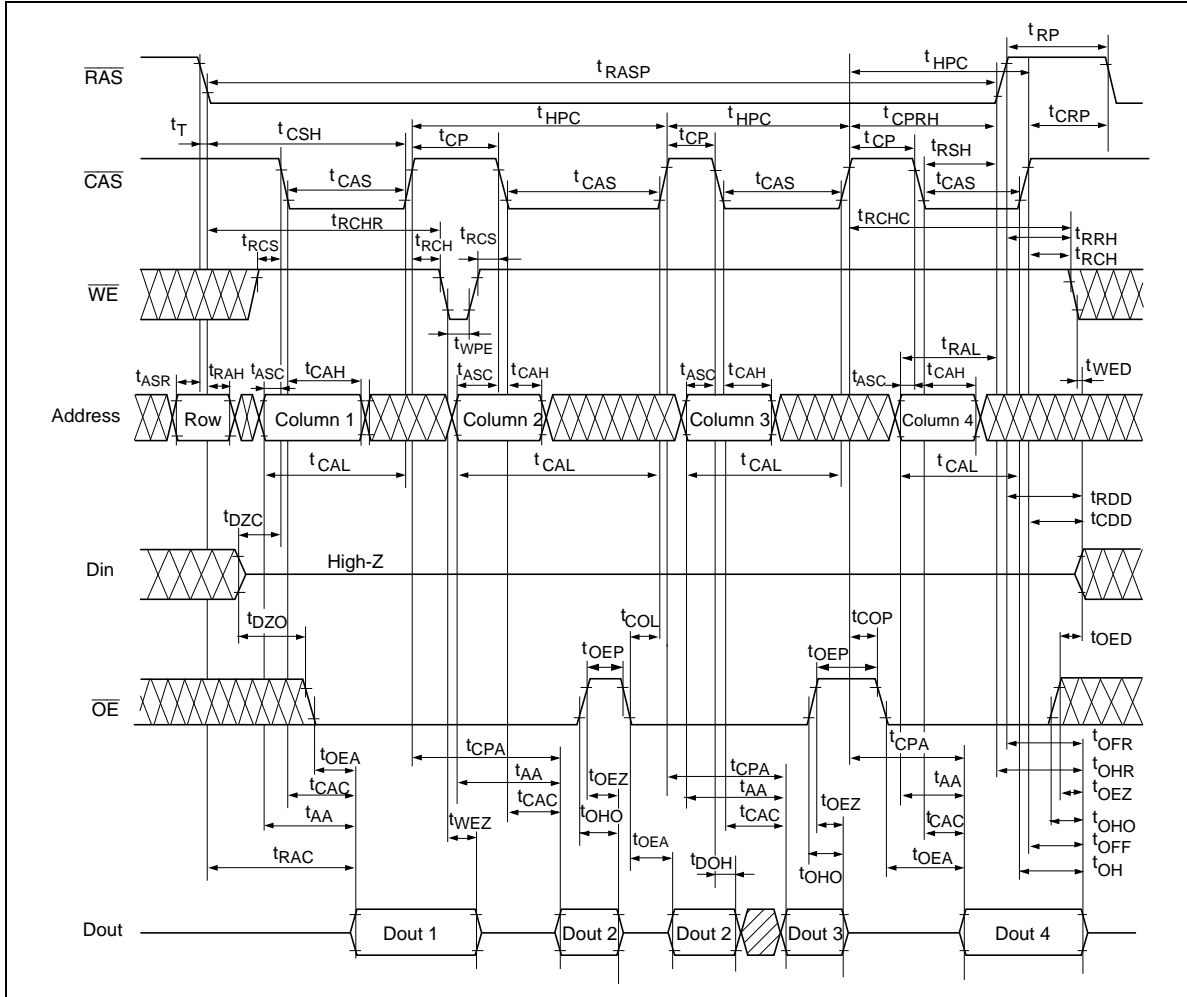




# HM5112805 Series, HM5113805 Series

## EDO Page Mode Read Cycle (2)

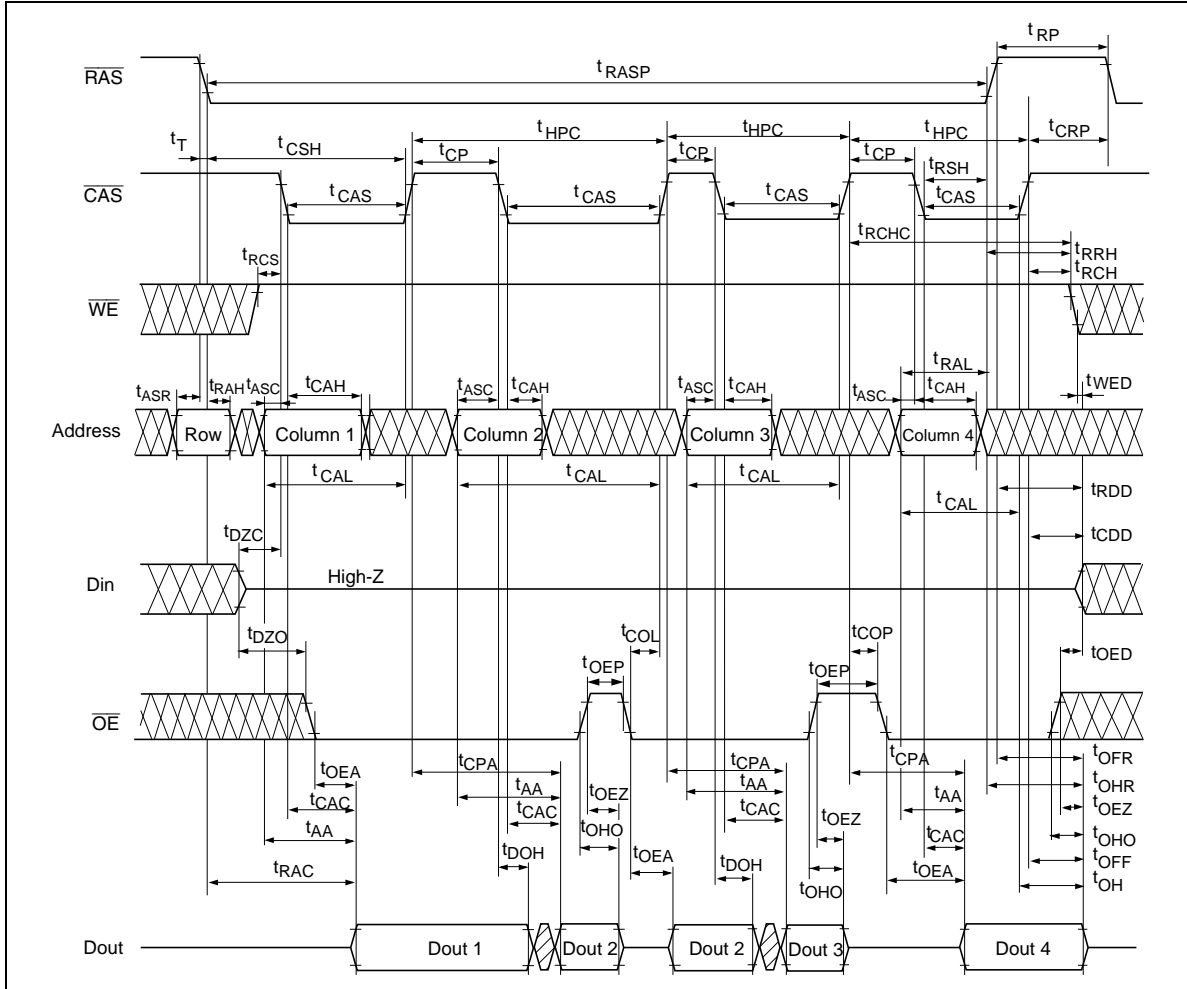


# HM5112805 Series, HM5113805 Series

## EDO Page Mode Early Write Cycle

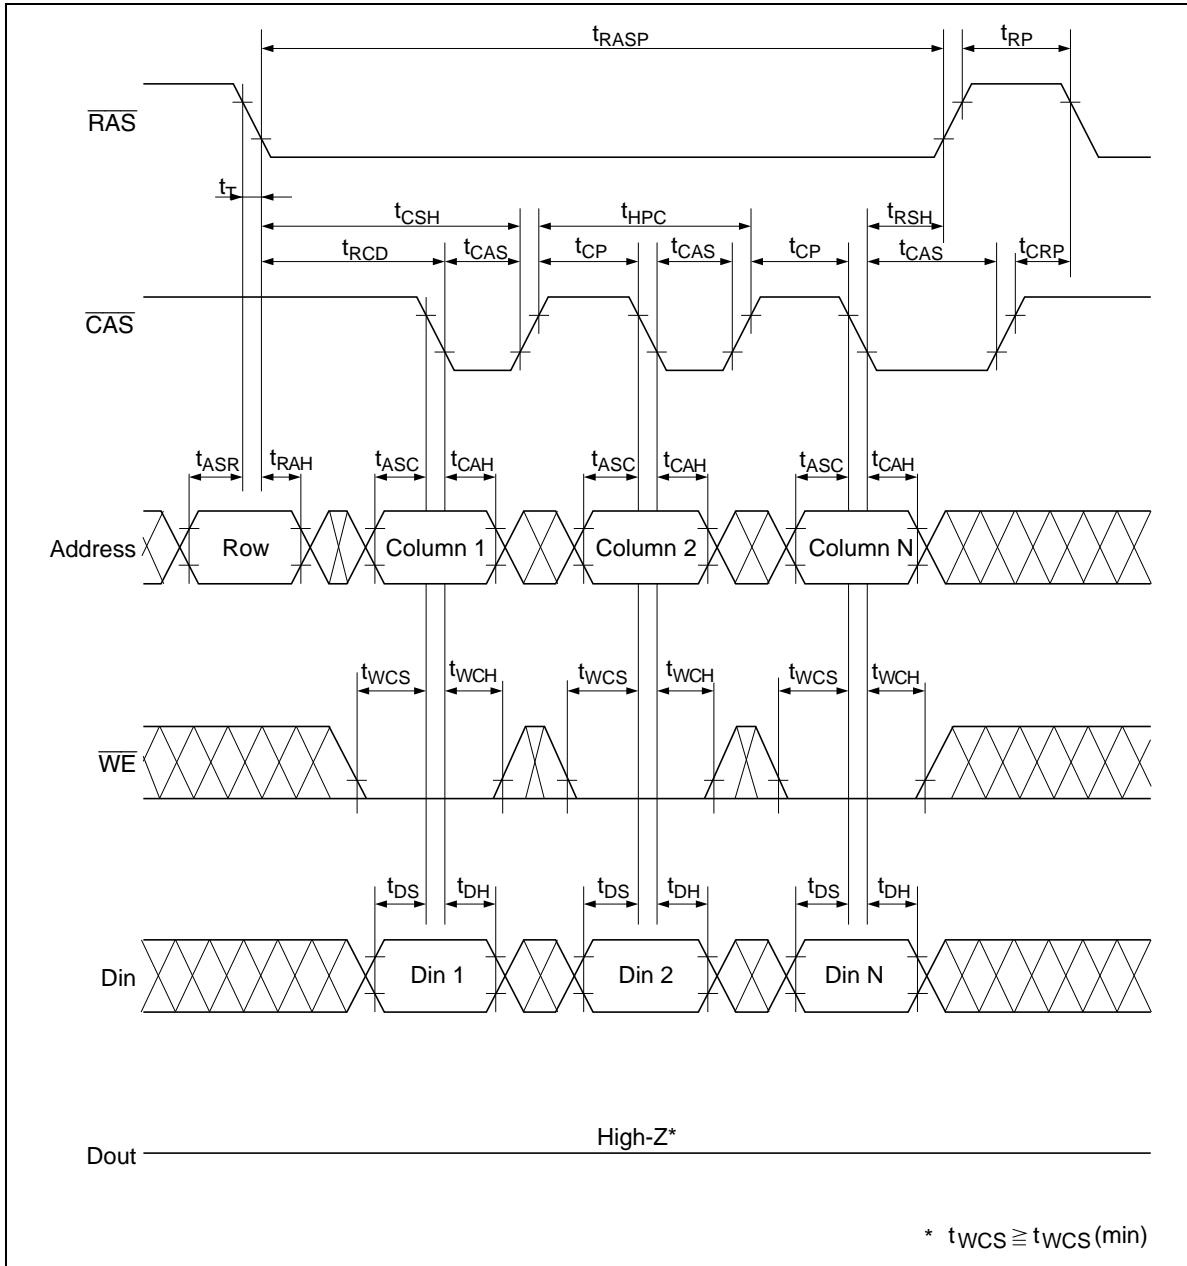


# HM5112805 Series, HM5113805 Series

## EDO Page Mode Delayed Write Cycle\*18

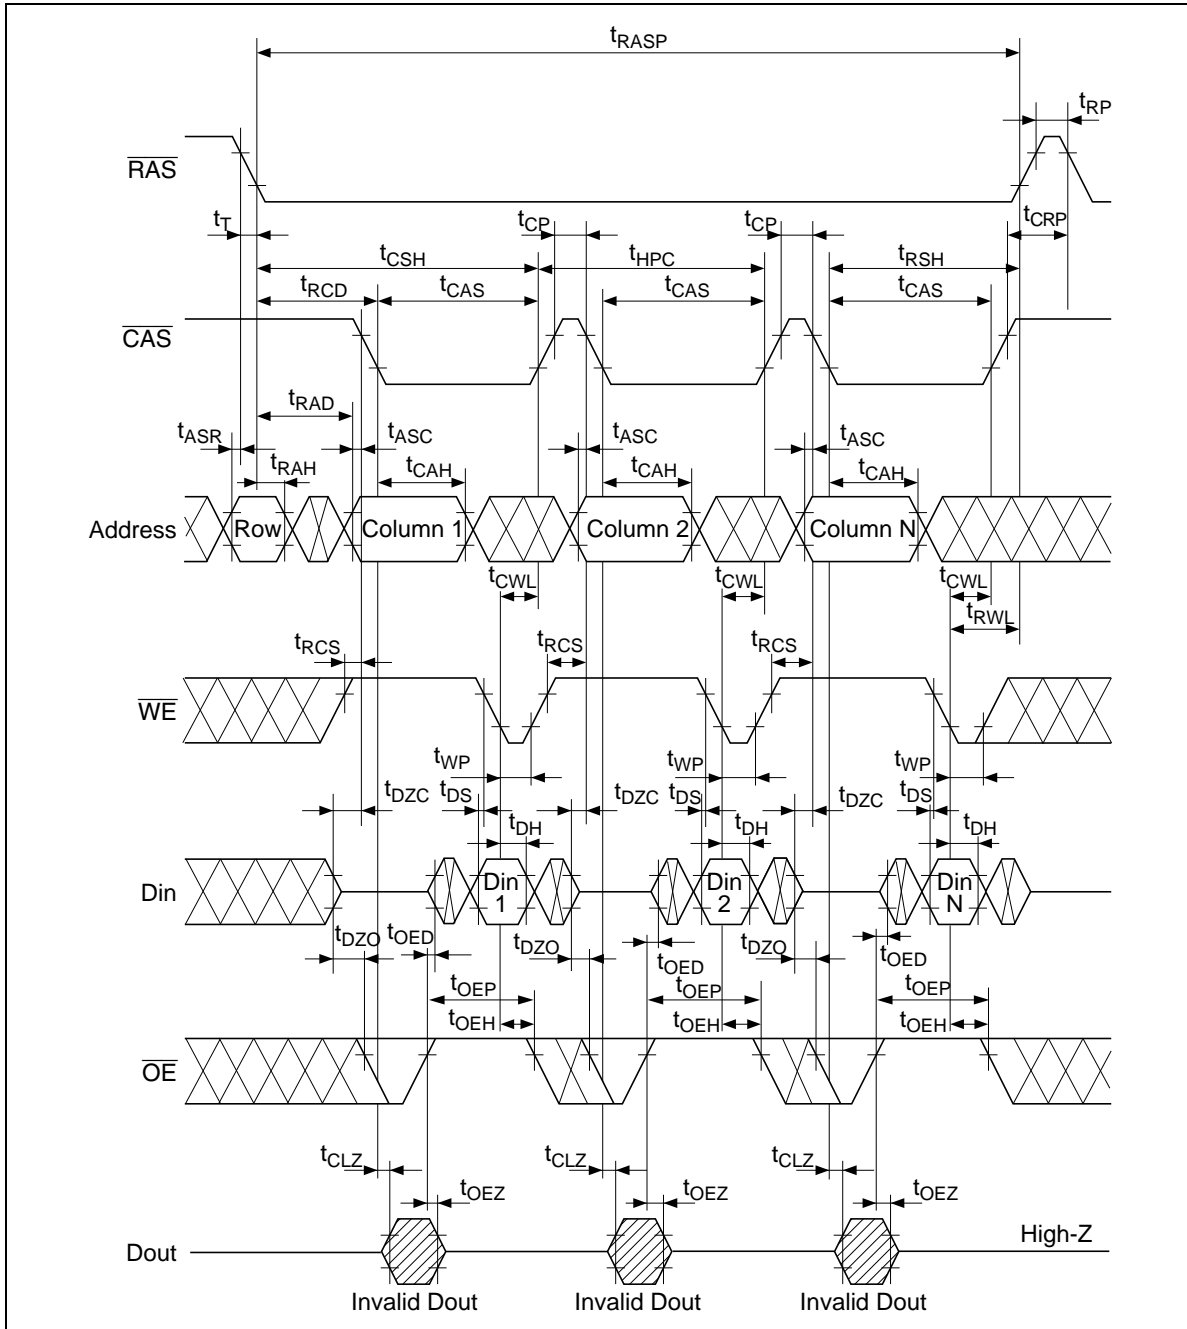


# HM5112805 Series, HM5113805 Series

## EDO Page Mode Read-Modify-Write Cycle\*<sup>18</sup>

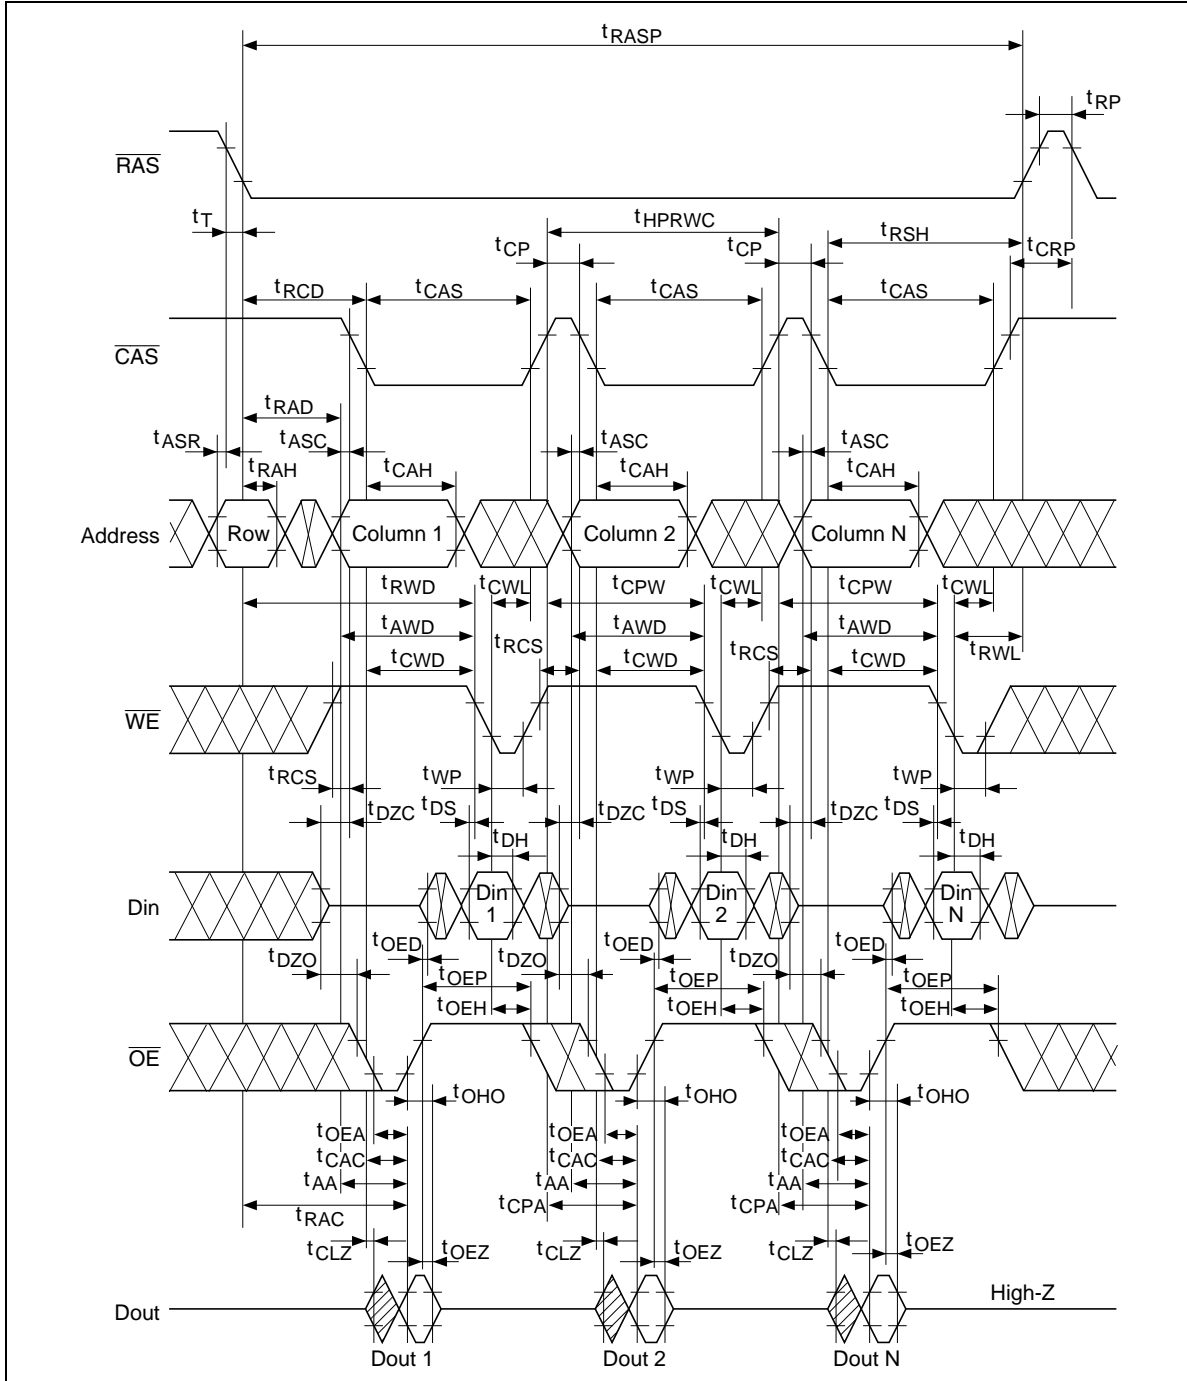


# HM5112805 Series, HM5113805 Series

## EDO Page Mode Mix Cycle (1)\*<sup>20</sup>

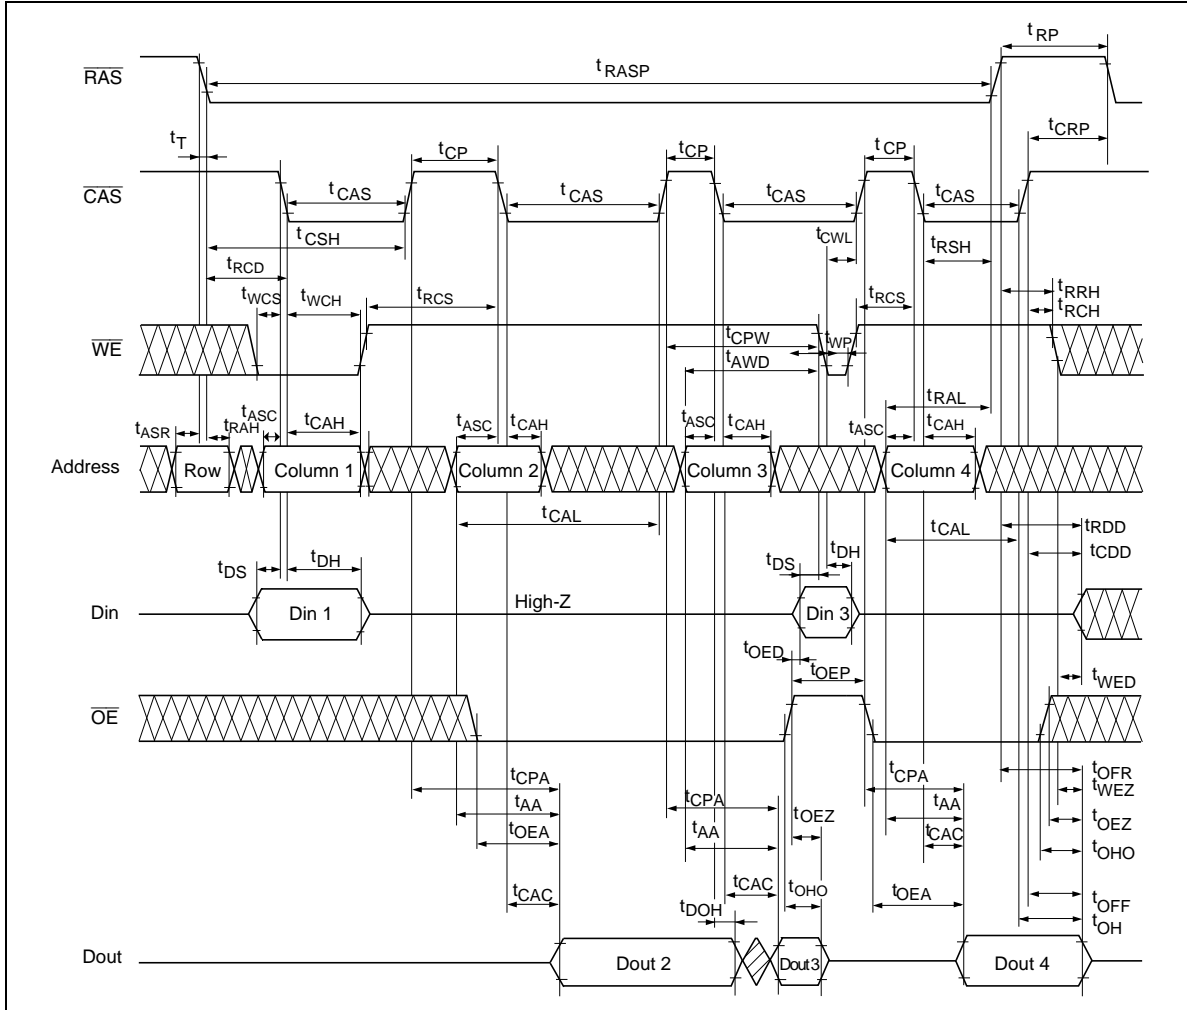


# HM5112805 Series, HM5113805 Series

## EDO Page Mode Mix Cycle (2) \*<sup>20</sup>

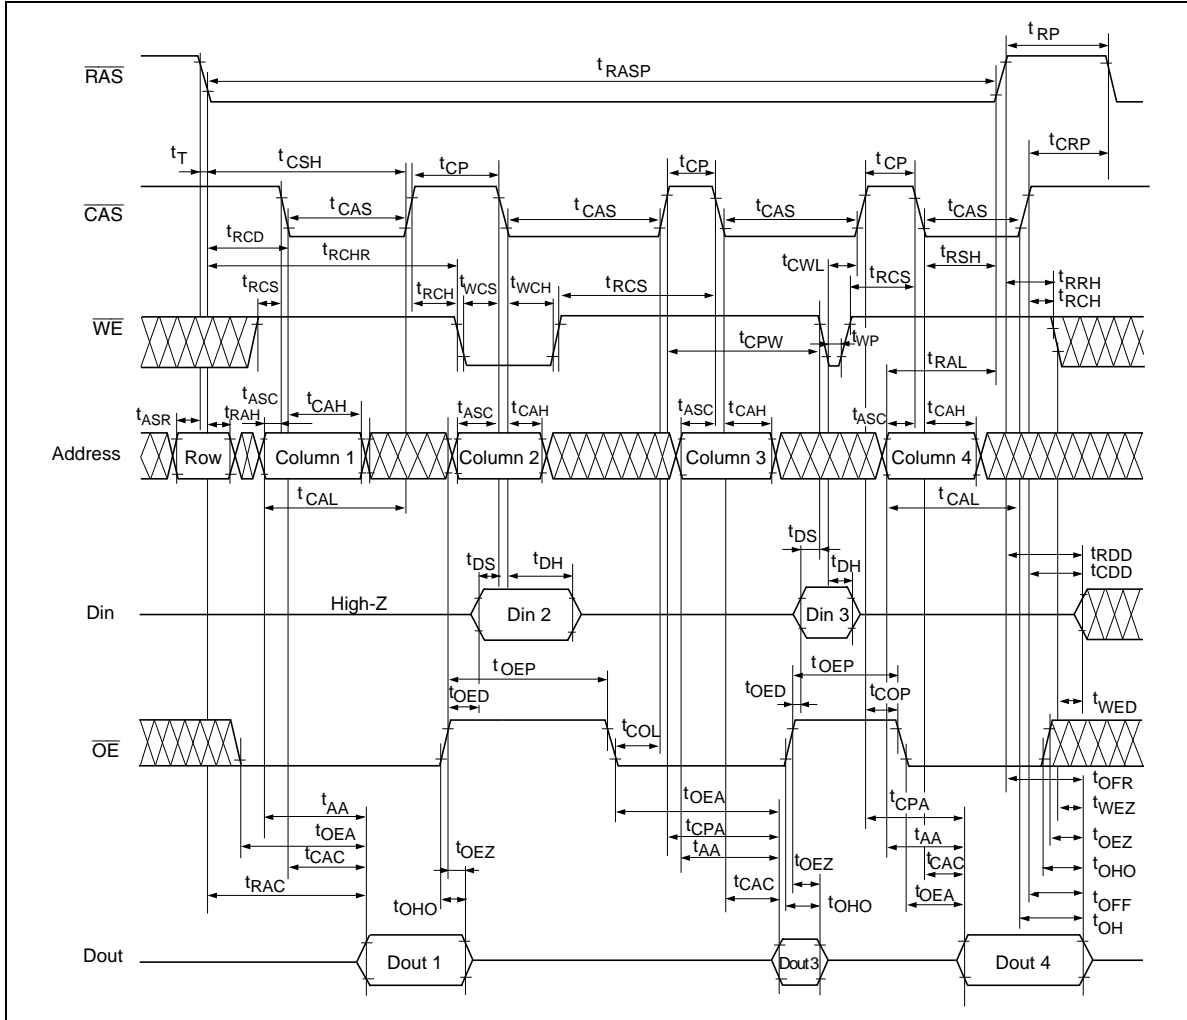

**HM5112805 Series, HM5113805 Series**

**Self Refresh Cycle (L-version)\*<sup>23, 24, 25</sup>**

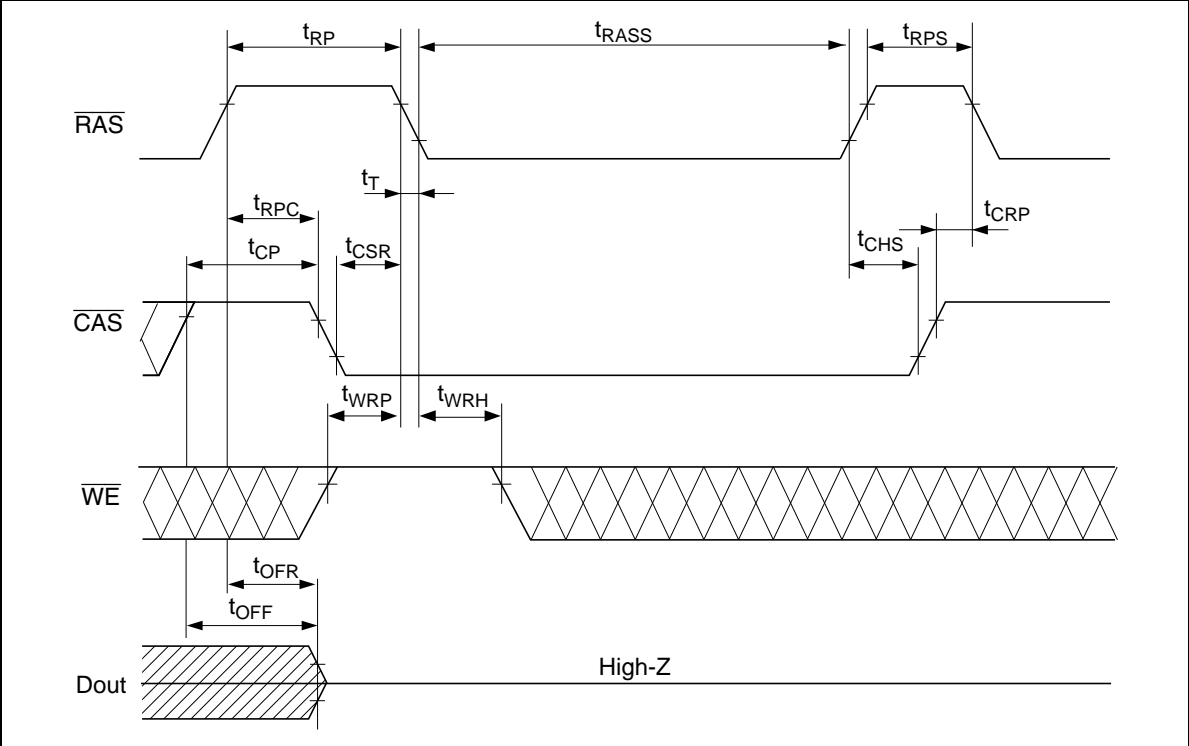


# HM5112805 Series, HM5113805 Series

## Package Dimensions

HM5112805TD/LTD Series

HM5113805TD/LTD Series (TTP-32DF)

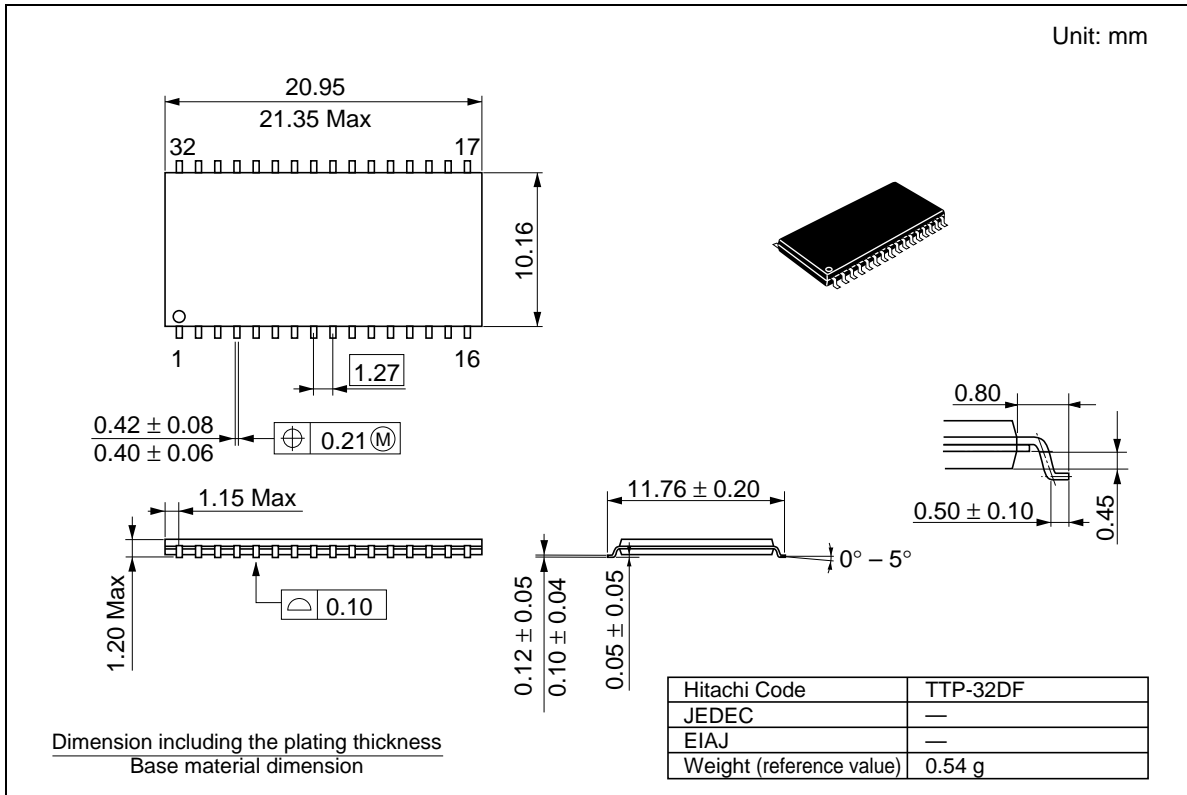



**Cautions**

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

---

## HM5112805 Series, HM5113805 Series

---

### Revision Record

Rev.	Date	Contents of Modification	Drawn by	Approved by
0.0	Oct. 13, 1997	Initial issue	M. Kawamura	Y. Takahashi
0.1	Jan. 28, 1998	Deletion of HM5112805L Series Deletion of HM5112805TD/LTD-5 Addition of HM5113805TD-6 Series Deletion of Self refresh cycle	M. Kawamura	Y. Takahashi
1.0	Apr. 3, 1998	Capacitance $C_{i/O}$ max: 7 pF to 8 pF	M. Kawamura	Y. Takahashi
2.0	Jul. 10, 1998	Addition of HM5112805LTD-6 Series Addition of HM5113805LTD-6 Series PKG code TTP-32DE to TTP-32DF DC Characteristics Addition of $I_{CC2}$ , $I_{CC10}$ , $I_{CC11}$ Addition of note 4 AC Characteristics Addition of $t_{REF}$ (L-version): 64 ms Addition of self refresh mode Addition of notes 23 to 25 Timing waveforms EDO page mode mix cycle (1), (2) Addition of self refresh cycle (L-version) Package Dimensions Change leader line of terminal length		

---