


# AG-12232C

•122x32 dots 1/32 Duty

## FEATURE

- 1.Construction : STN LCD, Heat seal, Edge LED back-light and PCB.
- 2.Controller : SED1520D0A or equivalent.
- 3.Besides +5V for logic circuit, -5V is needed for LCD driving.
- 4.Normal temperature type.

## BLOCK DIAGRAM

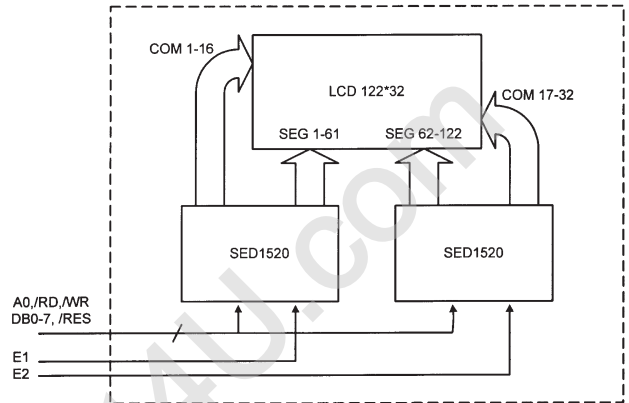

## ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Typ.Value	Unit.
LCD Driving Voltage	VDD-VO	25°C	6.1	V
Supply Current	IDD	VDD=5.0V	0.7	mA

## INTERFACE

1	2	3	4	5	6	7	8	9	10
VDD	VSS	VO	/RES	E1	E2	R/W	A0	DB0	DB1
11	12	13	14	15	16	17	18		
DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK		

