

GSM/DCS Dual-band Combiner


► Applications

- GSM, DCS In-building Wireless System

► Features

- High “Q”, Low Insertion Loss (-0.5dB typical)
- Small Size, High Isolation (-90dB typical)

► Technical Specifications

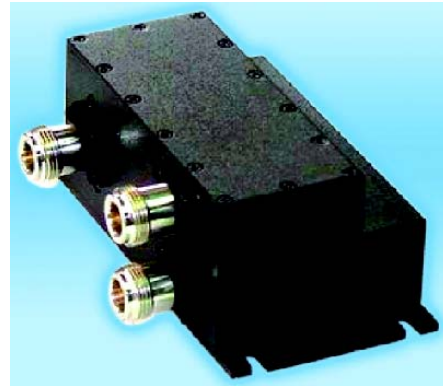

P/N	JXMBHL-T-2-G/D	
Port	GSM	DCS
Frequency Range	885-954MHz	1710-1825MHz
Insertion Loss	≤0.5dB	≤0.5dB
Ripple in band	≤0.3dB	≤0.3dB
VSWR	≤1.3	≤1.3
Rejection	≥90dB@1710-1825MHz	≥90dB@885-954MHz
Power Handling	50W	50W
Port Connector	N-Female	N-Female
Port Sign	Port1:ANT; Port2:GSM; Port3:DCS	

