


Low Voltage Adjustable Precision Shunt Regulator

Features

- Wide Programmable Precise Output Voltage from 1.24V to 18V
- High Stability under Capacitive Load
- Low Temperature Deviation: 3mV Typical
- Low Equivalent Full-Range Temperature Coefficient: 20PPM/ $^{\circ}$ C Typical
- Low Dynamic Output Resistance: 0.05 Ω Typical
- High Sink Current Capacity from 55 μ A to 100 mA
- Low Output Noise
- Wide Operating Range of -40 to 125 $^{\circ}$ C
- Available in RoHS Compliant, Lead Free Packaging

M1 Package
(SOT-89)



Applications

- Graphics Card
- PC Motherboard
- Voltage Adapter
- Switching Power Supply
- Charger

General Description

The SPX431LJ series ICs are low voltage three-terminal adjustable regulators with guaranteed thermal stability over a full operation range. These ICs feature sharp turn-on characteristics, low temperature coefficient and low output impedance, which make them ideal substitutes for Zener diodes in applications such as switching power supply, charger, motherboard and other adjustable regulators. The output voltage can be set to any value between 1.24V and 18V with two external resistors. The SPX431LJ precision reference is offered in two bandgap tolerances: 0.5% and 1%. These ICs are available in TO-92 and SOT-89 packages.

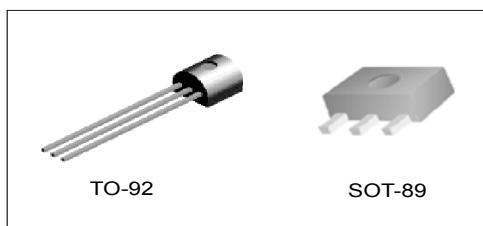


Figure 1. Package Types of SPX431LJ

Pin Configuration

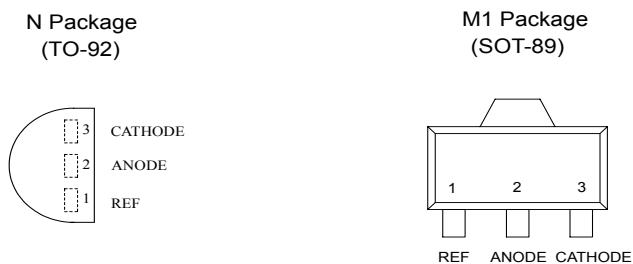


Figure 2. Pin Configuration of SPX431LJ (Top View)

Functional Block Diagram

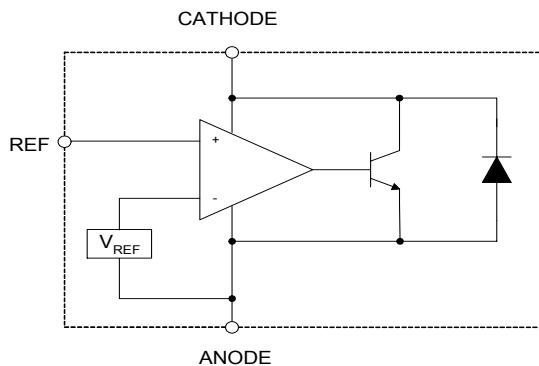


Figure 3. Functional Block Diagram of SPX431LJ

Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Value		Unit
Cathode Voltage	V _{KA}	20		V
Cathode Current Range (Continuous)	I _{KA}	-100 to 100		mA
Reference Input Current Range	I _{REF}	10		mA
Power Dissipation	P _D	TO-92, SOT-89 Package	770	mW
Storage Temperature Range	T _{STG}	-65 to 150		°C
		TO-92	130	°C/W
Package Thermal Impedance	Q _{JA}	SOT-89	100	

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Cathode Voltage	V _{KA}	V _{REF}	18	V
Cathode Current	I _{KA}	0.1	100	mA
Operating Ambient Temperature Range		-40	125	°C

Electrical Characteristics

(Typical and limits apply for T_J=25°C unless otherwise noted.)

Parameter	Test Circuit	Symbol	Conditions	Min	Typ	Max	Unit	
Reference Voltage	0.5%	V _{REF}	V _{KA} =V _{REF} , I _{KA} =10mA	1.234	1.240	1.246	V	
				1.228	1.240	1.252		
Deviation of Reference Voltage Over-Temperature		ΔV_{REF}	V _{KA} =V _{REF} I _{KA} =10mA	0°C to 70°C		2	10	
				-40°C to 85°C		3	10	
Ratio of Change in V _{REF} to the Change in Cathode Voltage	5	$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	I _{KA} =10mA, $\Delta V_{KA} \cdot V_{REF}$ to 16V		-0.5	-1.5	mV/V	
Reference Input Current	5	I _{REF}	I _{KA} =10mA, R ₁ =10KΩ, R ₂ =∞		0.15	0.4	μA	
Deviation of Reference Current Over Full Temperature Range	5	ΔI _{REF}	I _{KA} =10mA, R ₁ =10KΩ, R ₂ =∞ T _A =-40 to 85°C		0.1	0.4	μA	
Minimum Cathode Current for Regulation	4	I _{KA} (MIN)	V _{KA} =V _{REF}		55	80	μA	
Off-State Cathode Current		I _{KA} (OFF)	V _{REF} =0, V _{KA} =18V		0.04	0.10	μA	
			V _{KA} =6, V _{REF} =0		0.01	0.05		
Dynamic Impedance	4	Z _{KA}	V _{KA} =V _{REF} , I _{KA} =1 to 100mA f ≤ 1.0kHz		0.05	0.15	Ω	

Electrical Characteristics (Continued)




Figure 4. Test Circuit 4 for $V_{KA}=V_{REF}$

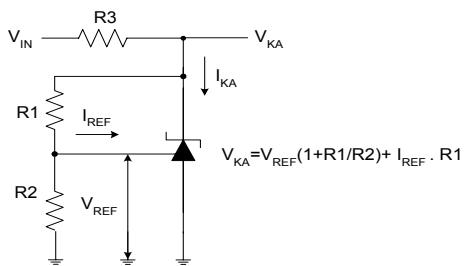


Figure 5. Test Circuit 5 for $V_{KA}>V_{REF}$




Figure 6. Test Circuit 6 for I_{OFF}

Typical Performance Characteristics

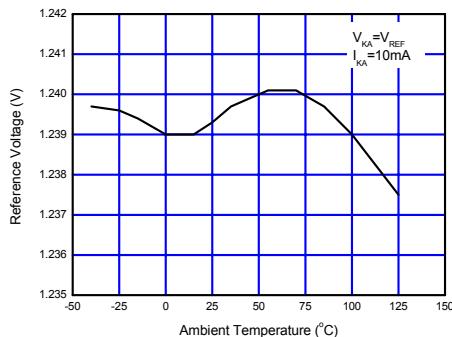


Figure 7. Reference Voltage vs. Ambient Temperature

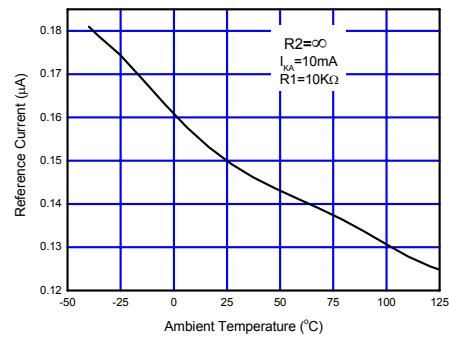


Figure 8. Reference Current vs. Ambient Temperature

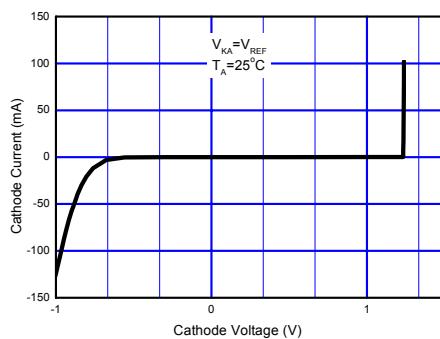


Figure 9. Cathode Current vs. Cathode Voltage

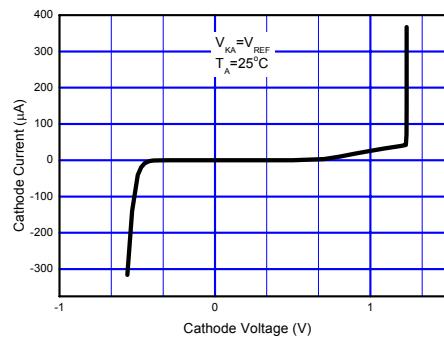


Figure 10. Current vs. Cathode Voltage

Typical Performance Characteristics (Continued)

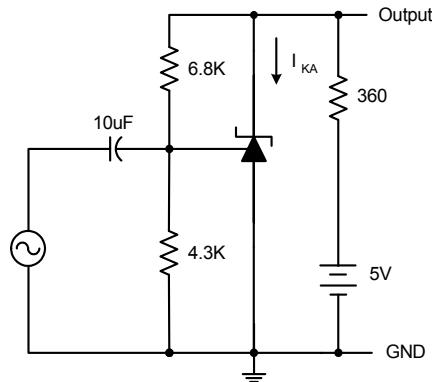
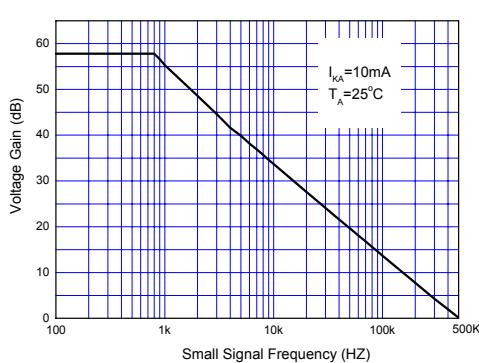


Figure 11. Small Signal Voltage Gain vs. Frequency

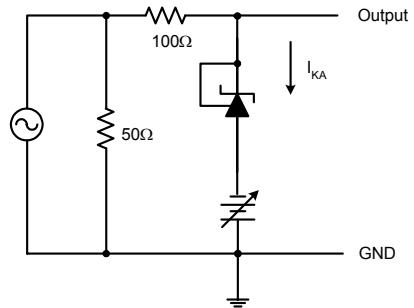
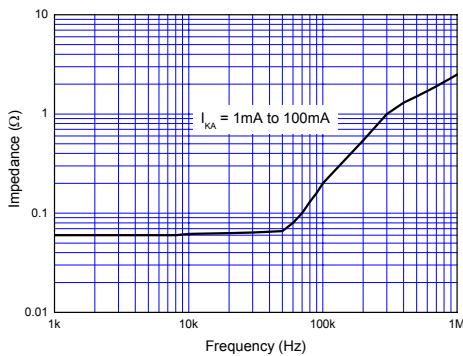


Figure 12. Dynamic Impedance vs. Frequency

Typical Performance Characteristics (Continued)

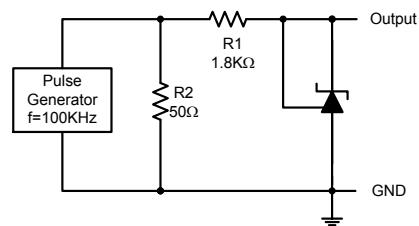
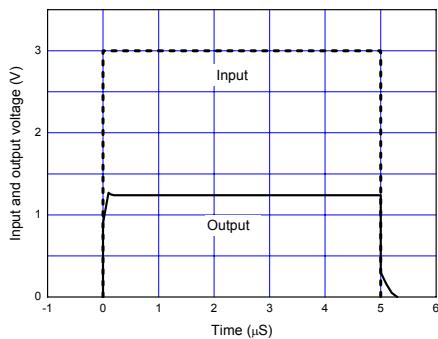


Figure 13. Pulse Response of Input and Output Voltage

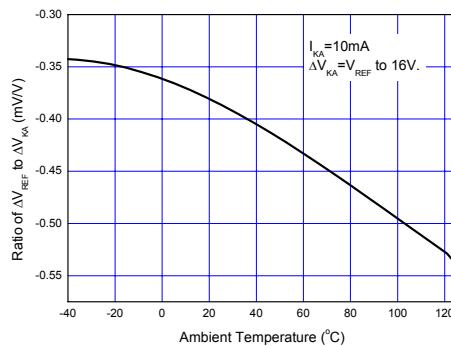


Figure 14. Ratio of Delta Reference Voltage to the Ratio of Cathode Voltage vs. Ambient Temperature

Typical Applications

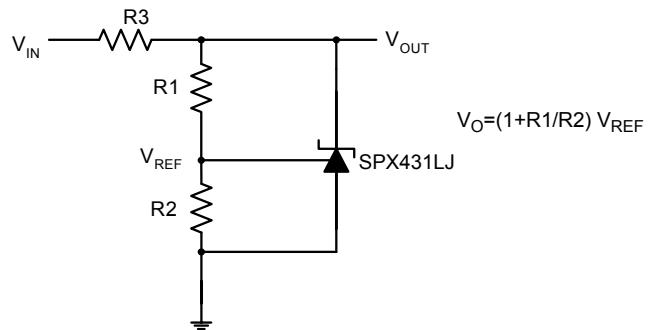


Figure 15. Shunt Regulator

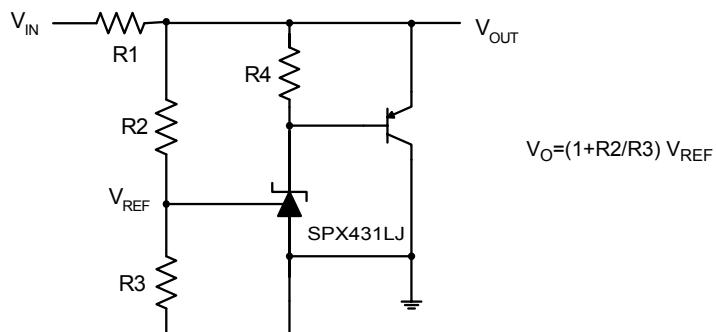


Figure 16. High Current Shunt Regulator

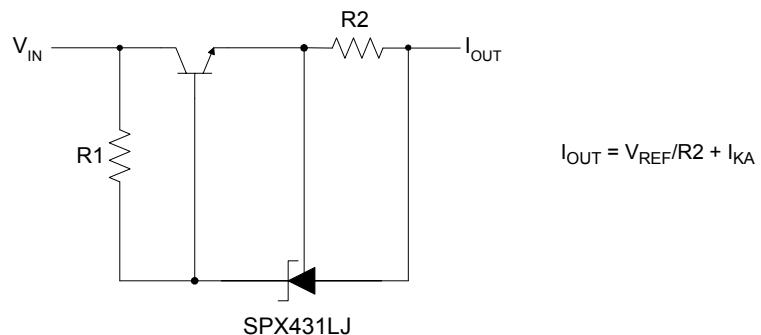


Figure 17. Current Source or Current Limit

Typical Application (Continued)

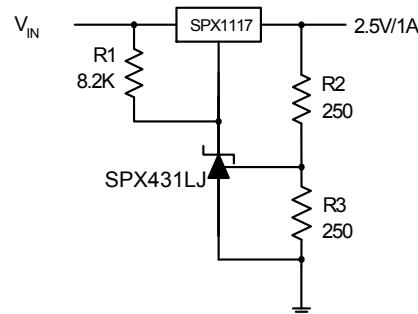


Figure18. Precision 2.5-V 1A Regulator

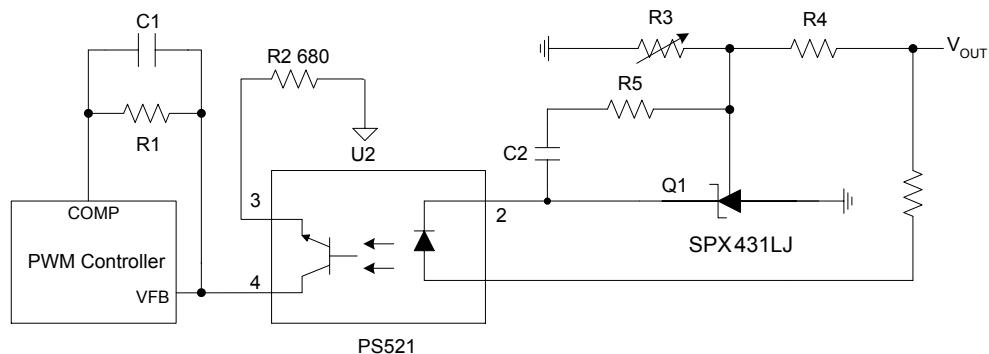
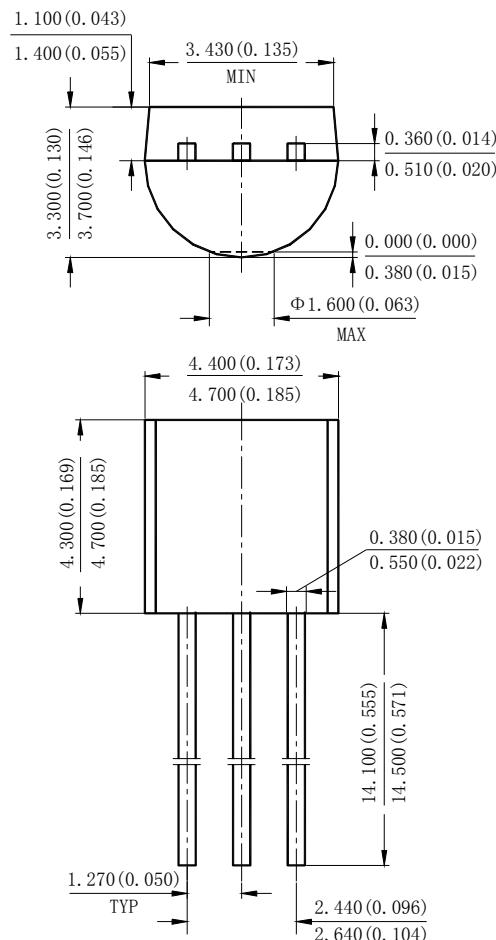
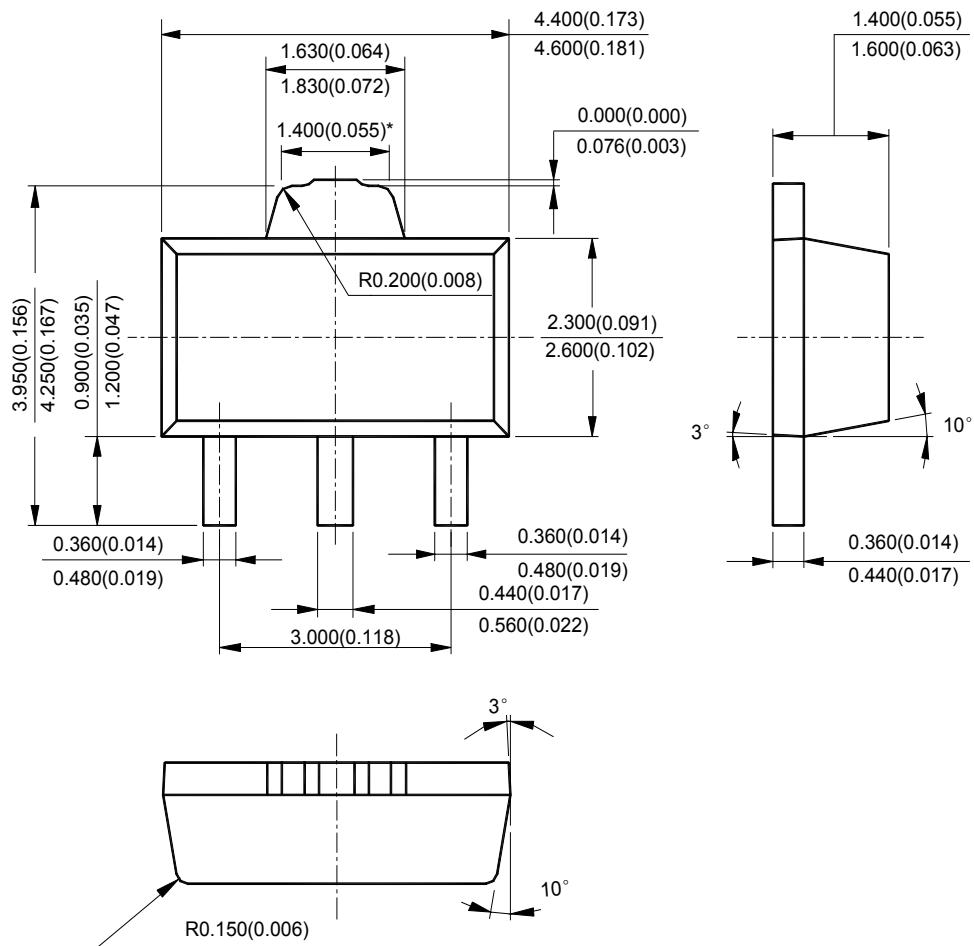


Figure 19. PWM Converter with Reference

Mechanical Dimensions**TO-92****Unit: mm (inch)**

Mechanical Dimensions (Continued)**SOT-89****Unit: mm(inch)**

SPX431LJ -

Part Number

Bandgap Tolerance

A: 0.5%

Blank: 1.0%

C: 2.0%

/TR: Tape and Reel

Blank: Tube or Bulk

-L: Lead Free and
RoHS Compliant

Package

N: TO-92

M1: SOT-89

Part Number	Temperature Range	Voltage Tolerance	Output Voltage	Package	Pin Count	Packing Type
SPX431LJAM1-L/TR	-40°C to +125°C	0.5%	Adj	SOT-89	3	1,000/TR
SPX431LJM1-L/TR	-40°C to +125°C	1.0%	Adj	SOT-89	3	1,000/TR
SPX431LJCM1-L/TR	-40°C to +125°C	2.0%	Adj	SOT-89	3	1,000/TR
SPX431LJAN-L/TR	-40°C to +125°C	0.5%	Adj	TO-92	3	2,000/AMMO
SPX431LJN-L/TR	-40°C to +125°C	1.0%	Adj	TO-92	3	2,000/AMMO
SPX431LJCN-L/TR	-40°C to +125°C	2.0%	Adj	TO-92	3	2,000/AMMO



Sipex Corporation

Headquarters and
Sales Office
233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 934-7500
FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.