




# Standard Precision Decade Voltage Dividers

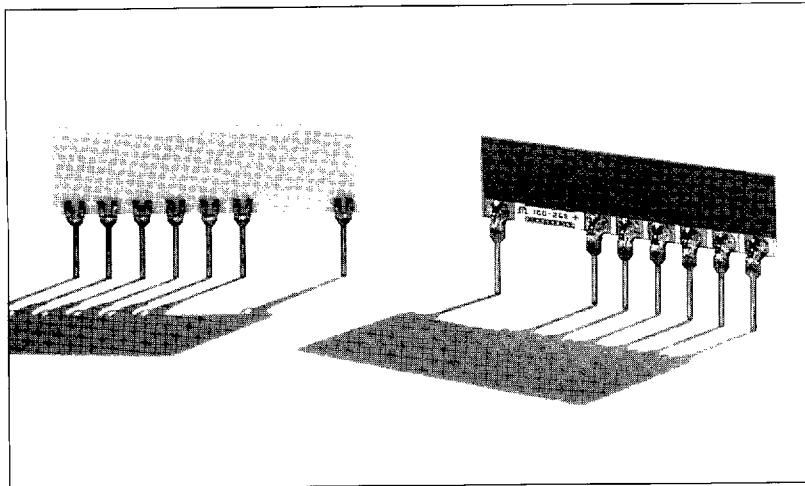


Precision resistor networks comprised of series-connected decade values are provided in single-in-line style with edge-mounted leads on 100 mil centers. Integrated thin film construction, laser-trimmed to extremely tight tolerances, insures exceptionally close tracking over temperature and throughout operating life, in either voltage division or current monitoring mode. Voltage coefficient and noise are extremely low. Designers gain several advantages over the use of discrete resistor sets, including smaller size, better overall tracking, greater reliability, and lower cost.

▼ **Table 2 General Specifications**

TCR (0°C to +60°C)	< 25 ppm/°C
Temperature Tracking (0°C to +60°C)	Resistance: 2.5 ppm/°C Voltage Ratio: 1.5 ppm/°C
Variation of Voltage Ratio with Voltage	0.1 ppm/volt
Load Life of Change (+70° ambient/rated voltage)	Resistance: 300 ppm/1,000 hrs Voltage Ratio: 50 ppm/1,000 hrs

\*Excluding the 100 ohm, except on special order.

▼ **Figure 26 Mechanical Specifications**

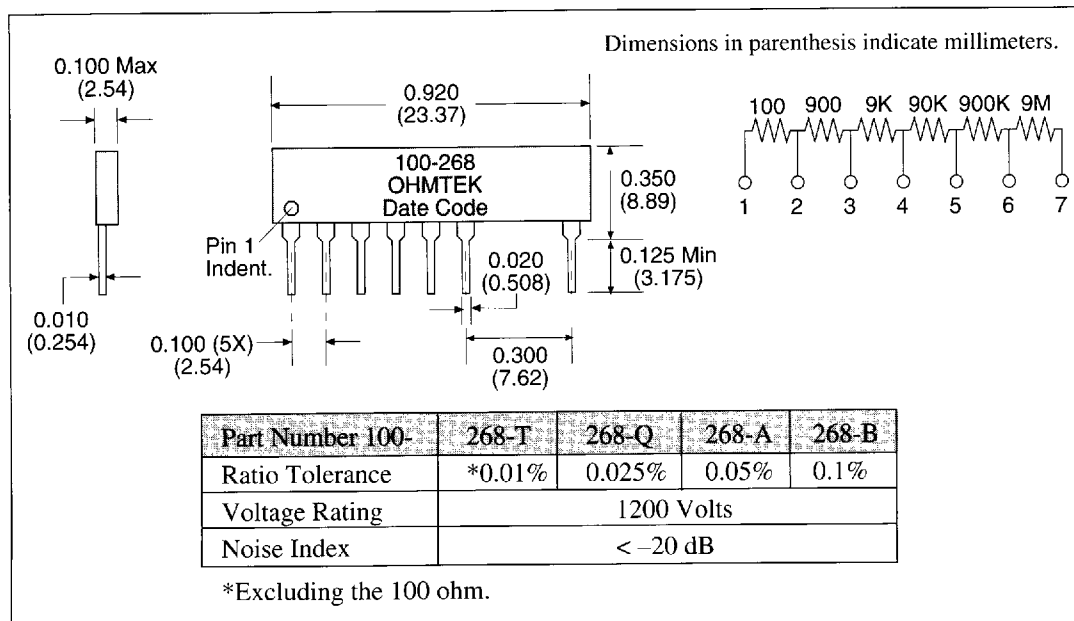

2160 Liberty Drive  
Niagara Falls  
New York 14304

Phone  
716-283-4025

FAX  
716-283-5932


**STANDARD PRODUCTS**



▼ **Table 3 Ratio for Series 100 - 268**

$\frac{R1 + R2 + R3 + R4 + R5}{RT}$	=	$\frac{1 \text{ Megohm}}{10 \text{ Megohms}}$	=	0.1
$\frac{R1 + R2 + R3 + R4}{RT}$	=	$\frac{100 \text{ Kohms}}{10 \text{ Megohms}}$	=	0.01
$\frac{R1 + R2 + R3}{RT}$	=	$\frac{10 \text{ Kohms}}{10 \text{ Megohms}}$	=	0.001
$\frac{R1 + R2}{RT}$	=	$\frac{1 \text{ Kohms}}{10 \text{ Megohms}}$	=	0.0001
R1	=	100 ohms		±0.1%

▼ **Figure 27 Mechanical Specifications**

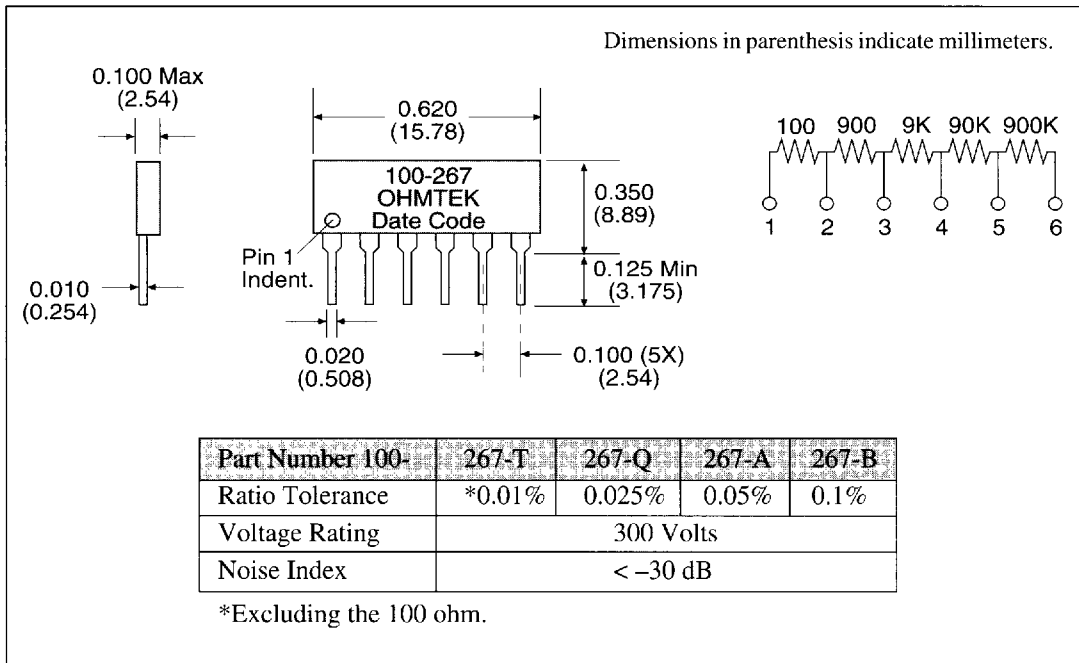

▼ **Table 4 Ratio for Series 100 - 267**

$\frac{R1 + R2 + R3 + R4}{RT}$	=	$\frac{100 \text{ Kohms}}{10 \text{ Megohms}}$	=	0.1
$\frac{R1 + R2 + R3}{RT}$	=	$\frac{10 \text{ Kohms}}{10 \text{ Megohms}}$	=	0.01
$\frac{R1 + R2}{RT}$	=	$\frac{1 \text{ Kohms}}{10 \text{ Megohms}}$	=	0.001
R1	=	100 ohms		±0.1%

**2160 Liberty Drive  
Niagara Falls  
New York 14304**

**Phone  
716-283-4025**

**FAX  
716-283-5932**