

Fuseholder Open Design, Holder for PSC 125V, THT



125 VAC · 5 A (UL)

**Description**

- Through hole mounting
- Fits to type:

Standards

- UL 512

Approvals

- UL File Number: E41738

References

General Product Information

Sicherungshalter zu PSC 125V

Weblinks

Approvals: www.schurter.com/approvals

RoHS: <http://www.schurter.com/rohs>

CHINA-RoHS: www.schurter.com/china-rohs

Webstore: www.schurterinc.com/estore/search.ihtml



Technical Data

| | |
|--------------------------|----------------------------|
| Fuse-Link | PSC Fuse |
| Mounting | PCB |
| Terminal | Solder THT |
| Rated Voltage | 125VAC |
| Rated Current | 5 A (UL) |
| Degree of Protection | IP 30 |
| Material: Terminals | Tin-Plated Copper Alloy |
| Unit Weight (Socket/Cap) | 0.7 g |
| Storage Conditions | 0°C to 60°C, max. 70% r.h. |

| | |
|------------------------------|--|
| Soldering Methods | Wave |
| Solderability | 235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1 |
| Resistance to Soldering Heat | 260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A |

Dimensions

Length 10.5 mm

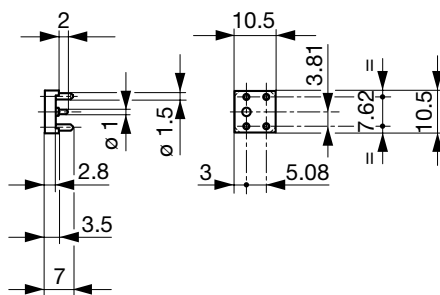

Drilling Diagram

Variants[Webstore](#)

Order Number Holder

7149.9017.01

**Packaging Unit**

Plastic Bag (100 pcs.)