

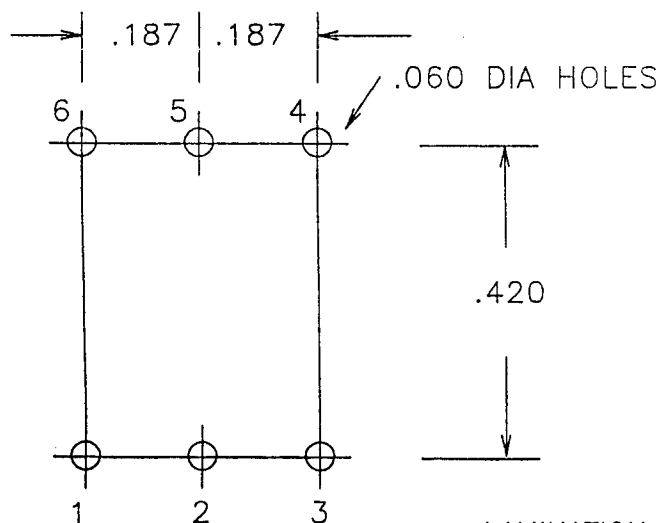
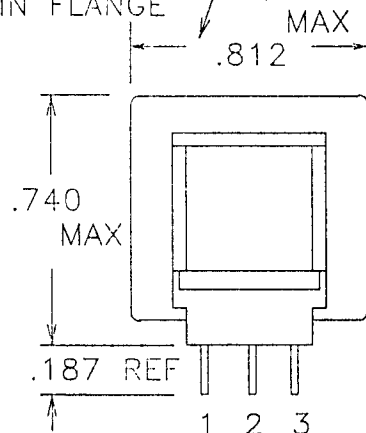


TOLERANCE UNLESS SPECIFIED = .XXX =  $\pm .005$  .XX =  $\pm .015$  FRACTIONS =  $\pm .032$

TY-141P.DC2

DOT ABOVE #1 PIN  
ON BOBBIN FLANGE

"TY-141P" TO READ  
TOWARD 1,2,3, SIDE  
ON TOP OF  
CORE

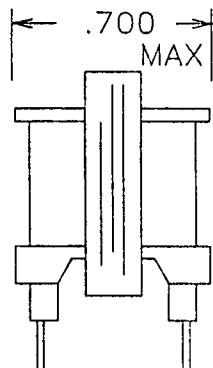

## PRODUCTION TESTS

Turns Ratio = 100%

|                             |                |
|-----------------------------|----------------|
| DC<br>RESISTANCE<br>IN OHMS | 1-3 = 820 NOM  |
|                             | 4-6 = 1070 NOM |

APPLY = 5V, 200 HZ, 1-3

INDUCTANCE: 19 HY MIN

HIPOT = 1500V PRI TO SEC & CORE  
1500V SEC TO CORE

MagneTek

PART NO. TY-141P