



No. 373 / TR5®

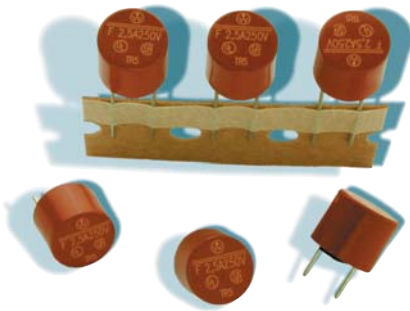

Dimensions (mm)

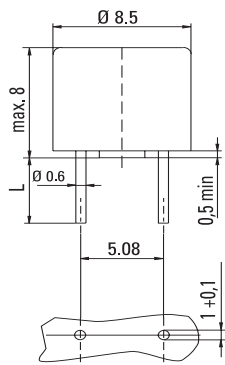

Holes in PCB
Long Leads (L=18.8mm)
Short Leads (L=4.3mm)

UL 248-14, 250 V, F

Time-Current Characteristic
Quick Acting (F)

Standard
UL 248-14
CSA C22.2 No. 248.14

Approvals
UL Listed
CSA Certified

Features

- Reduced PCB space requirements
- Direct solderable or plug-in versions
- Internationally approved
- Low internal resistance
- Shocksafe casing
- Vibration resistant
- Halogen free
- CCCe for China import

WebLinks

Further info see:
www.wickmanngroup.com

Further application info see
Fuseology:
www.wickmanngroup.com/download/fuseology.pdf

Specifications

Packaging
000: Tape/Ampopack (1000 pcs.)
041: Short Leads - Bulk (1000 pcs.)

Materials
Base/Cap: Brown Thermoplastic
Polyamide PA 6.6, UL 94V0
Round Pins: Copper, Sn plated

Operating Temperature
-40 °C to +85 °C (consider de-rating)

Climatic Category
-40 °C/+85 °C/21 days (EN 60068-1,-2-1,-2-2,-2-78)

Stock Conditions
+10 °C to +60 °C
relative humidity ≤ 75 % yearly average,
without dew, maximum value for 30 days-95 %

Vibration Resistance
24 cycles at 15 min. each (EN 60068-6)
10 - 60 Hz at 0.75 mm amplitude
60 - 2000 Hz at 10 g acceleration

Lead Pull Strength
10 N (EN 60068-2-21)

Solderability
260 °C, ≤ 3 s (Wave)
350 °C, ≤ 3 s (Soldering iron)

Soldering Heat Resistance
260 °C, 10 s (IEC 60068-2-20)

Marking
Ⓢ, 373, 250 V, F, Current Rating, Approvals

Unit Weight
0.77 g (approx.)

CCCe

Limits for Pre-arcing Time		
Rated Current	2.0 x I _N	2.0 x I _N Ⓢ
50 mA ... 10.00 A	< 60 s	< 5 s



Permissible continuous operating current is ≤ 70 % at ambient temperature of 23 °C (73.4 °F).


Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I _N Ⓢ max. (mV)	Power Dissipation 1.0 x I _N Ⓢ max. (mW)	Melting Integral 10 x I _N Ⓢ max. (A ² s)	Approvals			
							UL	CSA	cULus	CCCe
50mA	0050	250V		1400	70	0.0001	•	•	•	
63mA	0063	250V		1300	85	0.00023	•	•	•	
80mA	0080	250V		1200	100	0.00037	•	•	•	
100mA	0100	250V		1100	110	0.0013	•	•	•	
125mA	0125	250V		1000	125	0.0019	•	•	•	
160mA	0160	250V		950	155	0.004	•	•	•	
200mA	0200	250V		850	170	0.0065	•	•	•	
250mA	0250	250V		750	190	0.014	•	•	•	
315mA	0315	250V		650	205	0.032	•	•	•	
400mA	0400	250V	50A/250V AC 50-60 Hz cos φ=1.0	230	95	0.016	•	•	•	
500mA	0500	250V		220	110	0.024	•	•	•	
630mA	0630	250V		210	135	0.039	•	•	•	
800mA	0800	250V		200	160	0.069	•	•	•	
1.00A	1100	250V		190	190	0.11	•	•	•	
1.25A	1125	250V		180	225	0.2	•	•	•	
1.60A	1160	250V		170	275	0.38	•	•	•	
2.00A	1200	250V		160	320	0.63	•	•	•	
2.50A	1250	250V		150	375	1.2	•	•	•	
3.15A	1315	250V		140	445	1.9	•	•	•	
4.00A	1400	250V	130	520	3.5	•	•	•		
5.00A	1500	250V	120	630	6.2	•	•	•		
6.30A	1630	250V	115	1000	9.1	•	•	•		
8.00A	1800	250V	120	1600	30				•	
10.00A	2100	250V	110	2000	55				•	

¹ Conducting path cross-section minimum ≥ 0.2mm²

Order Information	Qty.	Order-Number	Series	Amp Code	Packaging
				373	

Specifications are subject to change without notice

TR5[®] / No. 373

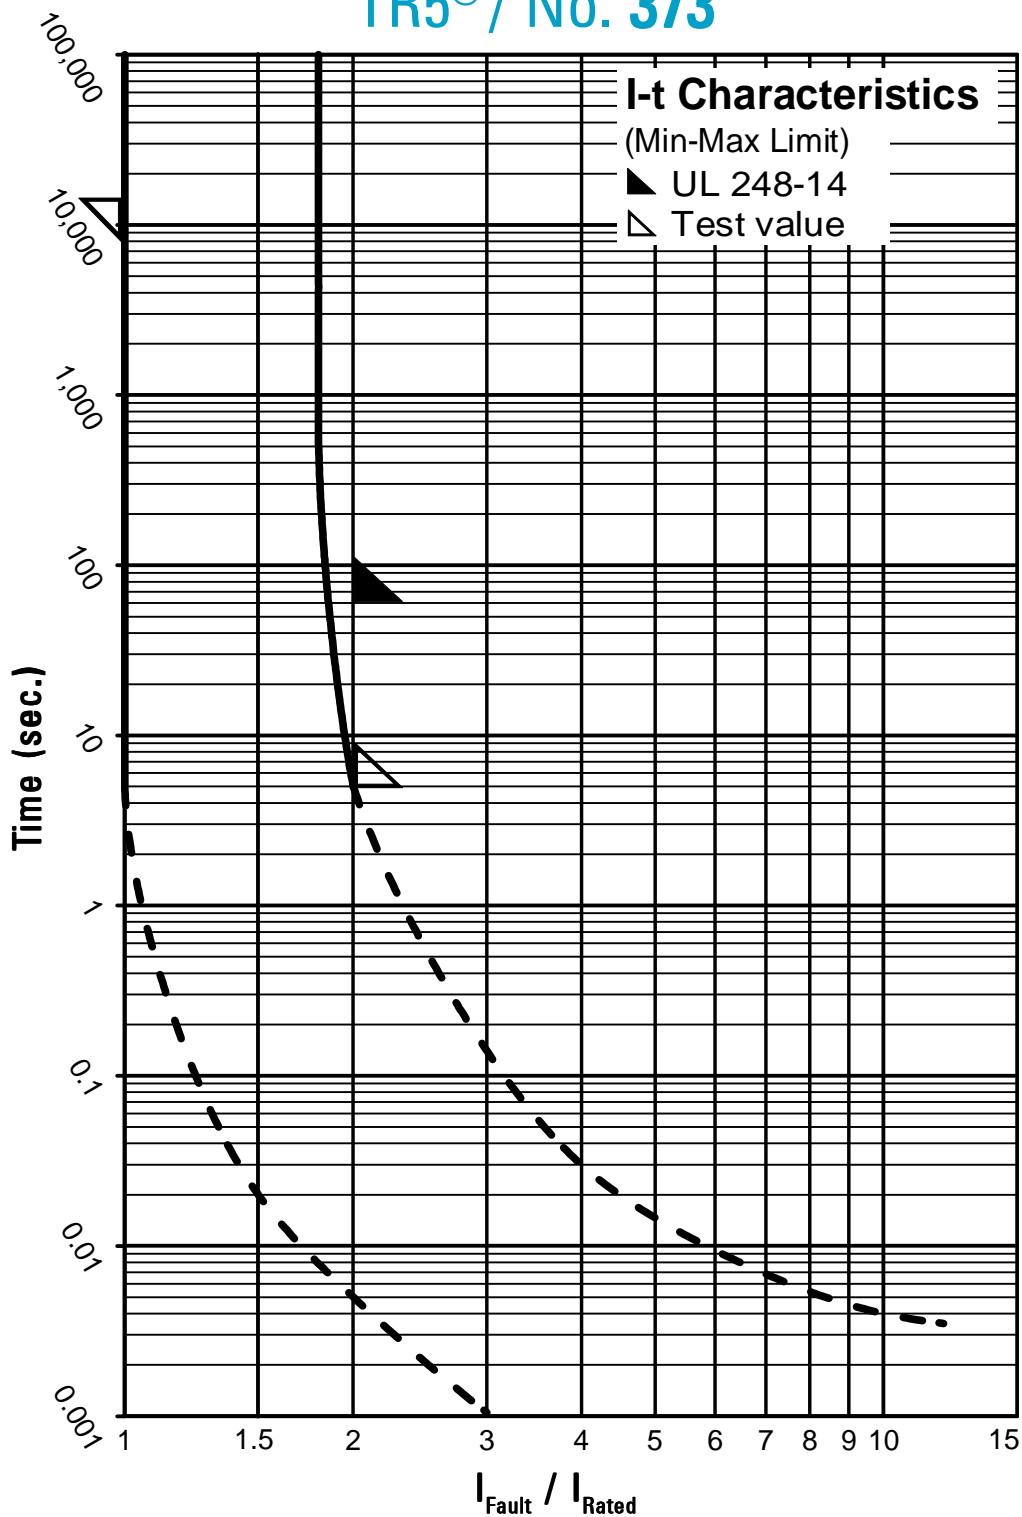

Contact WICKMANN for individual I-t curves