

720-4668



VALVESTOCK

Shogun House, Newgate Lane, Fareham, Hants. PO14 1BP

Telephone : 01329 283425 Fax: 01329 822741

223 Europa Boulevard, Gemini Business Park, Warrington, WA5 5TN


Telephone : 01925 242628 Fax: 01925 242638

Unit 3, Tipton Trading Estate, Bloomfield Road Tipton DY4 9AH

Telephone : 0121 557 3361 Fax: 0121 557 5481

VALVESTOCK FIG. 85 FULL BORE BRASS BALL VALVE


- Blow-out proof stem
- Hard chromium plated ball
- Virgin PTFE seats and stem seals
- Threaded BSP Parallel
- Bi-Directional flow for ease of installation
- Adjustable Gland
- Dacrotized Steel Handle with PVC Sleeve



Temperature Range

-20°C +170°C

"T" handle available for valves from 1/4" to 1"

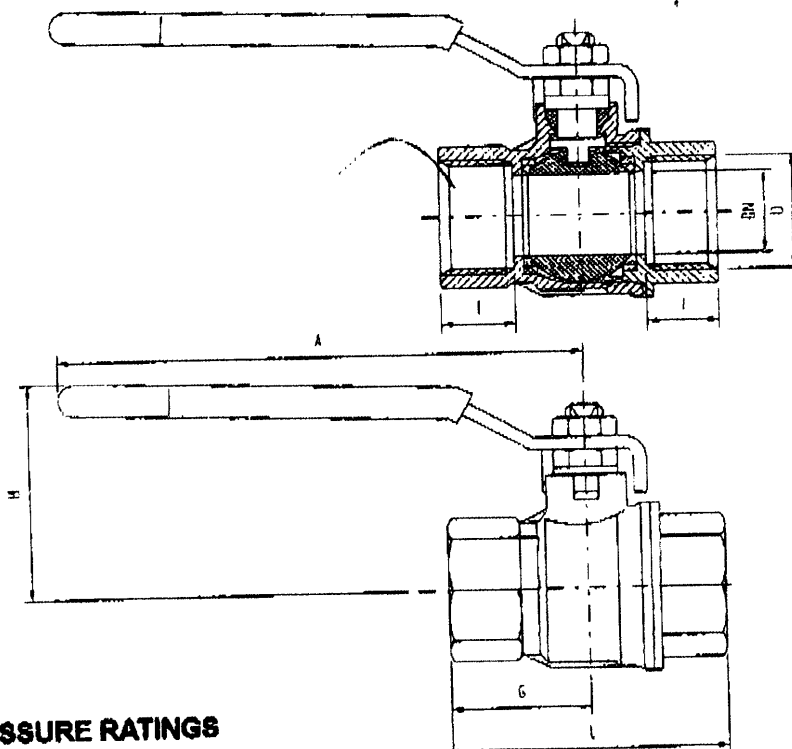

DIMENSIONS AND PRESSURE RATINGS

D inch	DN mm	L mm	L mm	G mm	A mm	H mm	PN
1/4	8	12	45	22.5	82	39.5	30
3/8	10	12	45	22.5	82	39.5	30
1/2	15	15.5	59	29.5	100	43	30
3/4	20	17	64	32	120	50	30
1	25	21	81	40.5	120	54	30
1 1/4	32	23	93	46.5	158	76.5	30
1 1/2	40	23	102	51	158	82.5	30
2	50	26.5	121	60.5	158	89.5	30

MATERIALS

Part	Material
Body	MS58 Brass (Nickel plated)
Seat	PTFE
Stem	OT58 Brass (Nickel plated)
Ball	MS58 Brass (Chrome plated)
Gland	OT58 Brass (Nickel plated)
Gland Seal	PTFE