


IC-Fassungen, Low cost-Version, Raster 2.54mm

IC-sockets, low cost version, pitch 2.54mm



Isolierkörper

Polyester, glasfaserverstärkt,
UL 94V-0

Kontakte

Phosphorbronze, verzinnt

Betriebstemperatur

-55°C bis + 105°C

Strombelastbarkeit

1A

Durchschlagspannung

1000V AC (1min)

Insulator

Polyester, glass reinforced
UL 94V-0

Contacts

Phosphor bronze, tin plated

Operating temperature

-55°C to +105°C



Current rating

1A

Withstanding voltage

1000V AC (1min)

| No. of Contacts | Qty per Tube | Dimensions | | |
|-----------------|--------------|------------|-------|-------|
| | | A | B | C |
| 06 | 80 | 7.62 | 10.0 | 7.62 |
| 08 | 60 | 10.06 | 9.96 | 7.62 |
| 14 | 34 | 17.68 | 9.96 | 7.62 |
| 16 | 30 | 20.22 | 9.96 | 7.62 |
| 18 | 26 | 22.76 | 9.96 | 7.62 |
| 20 | 24 | 22.86 | 9.96 | 7.62 |
| 22 | 21 | 27.80 | 9.96 | 7.62 |
| 22* | 21 | 27.70 | 12.62 | 10.16 |
| 24 | 20 | 30.38 | 17.68 | 15.24 |
| 24** | 20 | 30.38 | 17.68 | 7.62 |
| 28 | 17 | 35.46 | 17.68 | 15.24 |
| 28** | 17 | 35.46 | 17.68 | 7.62 |
| 32 | 15 | 40.50 | 17.68 | 15.24 |
| 40 | 12 | 50.70 | 17.68 | 15.24 |

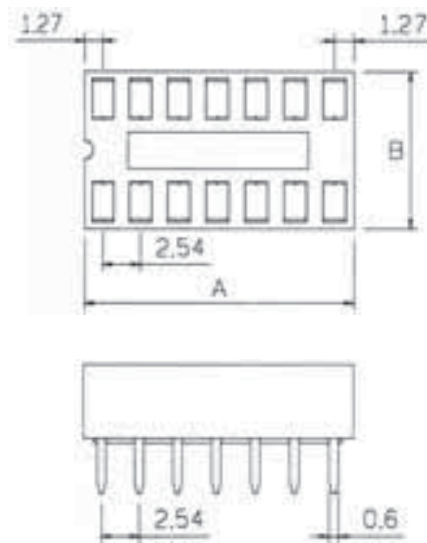

Bestellcode: **A** - **x** - **LC** - **x**
 Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen
 Please replace „x“ with appropriate option listed below

1. 2.

1.

Polzahl

06, 08, 14, 16, 18, 20, 22, 24, 28, 32, 40

No. of contacts

06, 08, 14, 16, 18, 20, 22, 24, 28, 32, 40

2.

Ausführung

TT -Standard
 T2* -Gesamtbreite(B) des Isolierkörpers 12.62mm
 (nur 22-polig verfügbar)
 7-T** -Raster 7.62mm (nur 24 und 28 polig)
 TR -gesickt

Version

TT -Standard
 T2* -width(B) of the Isobody 12.62mm
 (only 22-poles available)
 7-T** -pitch 7.62mm (only 24 and 28 poles)
 TR -retentive legs