

CMOS SJ-A1450 Series

Description


The **SJ-A1450 Series** of quartz crystal oscillators provide enable/disable 3-state CMOS compatible signals for bus connected systems. Supplying Pin 1 of the SJ-A1450 units with a logic "1" or open enables its pin 3 output. In the disabled mode, pin 3 presents a high impedance to the load. All units are designed to survive wave soldering operations without damage.

Features

- Wide frequency range— 4.0MHz to 40.0MHz
- User specified tolerance available
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 3000g
- Metal lid electrically connected to ground to reduce EMI
- 3.3 Volt operation
- Low Jitter
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- Low power consumption
- Gold plated leads
- TTL compatible (HCT) at specified supply voltage

Electrical Connection

Pin	Connection
1	Enable/Disable Input
2	Ground
3	Output
4	V _{DD}

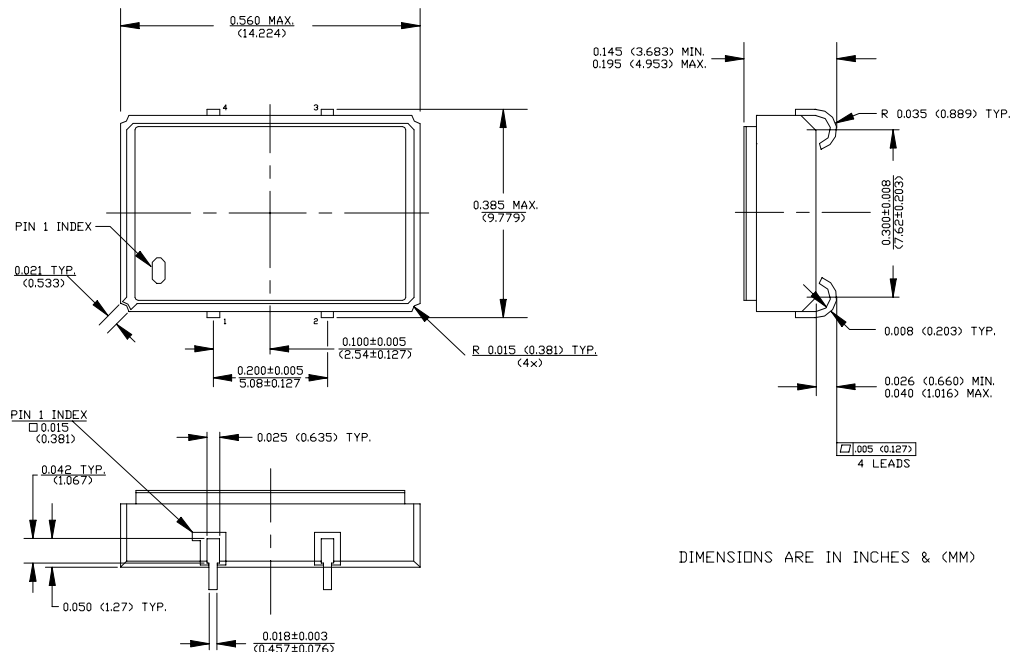

SJ-A1450 Series Continued
CMOS

Rev. J

Operating Conditions and Output Characteristics

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	-----	-----	4.0MHz	-----	40.0MHz
Duty Cycle	-----	@ V _{DD} /2	45/55%	-----	55/45%
Logic 0	V _{OL}	@ 600μA	-----	-----	0.2V
Logic 1	V _{OH}	@ 600μA	V _{DD} -0.2V	-----	-----
Rise & Fall Time	tr,tf	10-90%	-----	-----	3 ns
TPz	-----	-----	-----	-----	25 ns
Jitter, RMS ⁽²⁾	-----	-----	-----	-----	8 psec
Frequency Stability ⁽¹⁾	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100ppm	-----	+100ppm

General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	V _{DD}	-----	3.135V	3.3V	3.465V
Supply Current	I _{DD}	No Load	0.0 mA	-----	30mA
Output current	I _O	-----	0.0 mA	-----	±16.0 mA
Operating temperature	T _A	-----	0°C	-----	70°C
Storage temperature	T _S	-----	-55°C	-----	125°C
Power Dissipation	P _D	-----	-----	-----	104 mW
Lead temperature	T _L	Soldering, 10 sec.	-----	-----	300°C
Load	---	-----	-----	-----	15pf
Start-up time	t _S	-----	-----	2 ms	10 ms

Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-833, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Soldering Condition	300°C for 10 seconds
Hermetic Seal	Leak rate less than 1 x 10 ⁻⁸ atm.cc/sec of helium

Footnotes:

- Standard frequency stability (±20,±25,±50ppm & others available)
- Jitter performance is frequency dependent. Please contact factory for full characterization.

Creating a Part Number		
SJ- A145X - FREQ		
Package Code		Tolerance/Performance
SJ 4 J Lead SMD		0 ±100ppm 0-70°C
		1 ±50ppm 0-70°C
		7 ±25ppm 0-70°C
		9 Customer Specific
Input Voltage		A ±20ppm 0-70°C
Code Specification		B ±50ppm -40 to +85°C
A 3.3V		C ±100ppm -40 to +85°C
5V		

Test Load:

