


Panel Mount Mini-DIN Receptacle

161-381/3-E, 161-381/4-E, 161-381/5-E,
161-381/6-E, 161-381/8-E

KOBICONN

Panel Mount Mini-DIN Receptacle 161-381/3-E, 161-381/4-E, 161-381/5-E, 161-381/6-E, 161-381/8-E

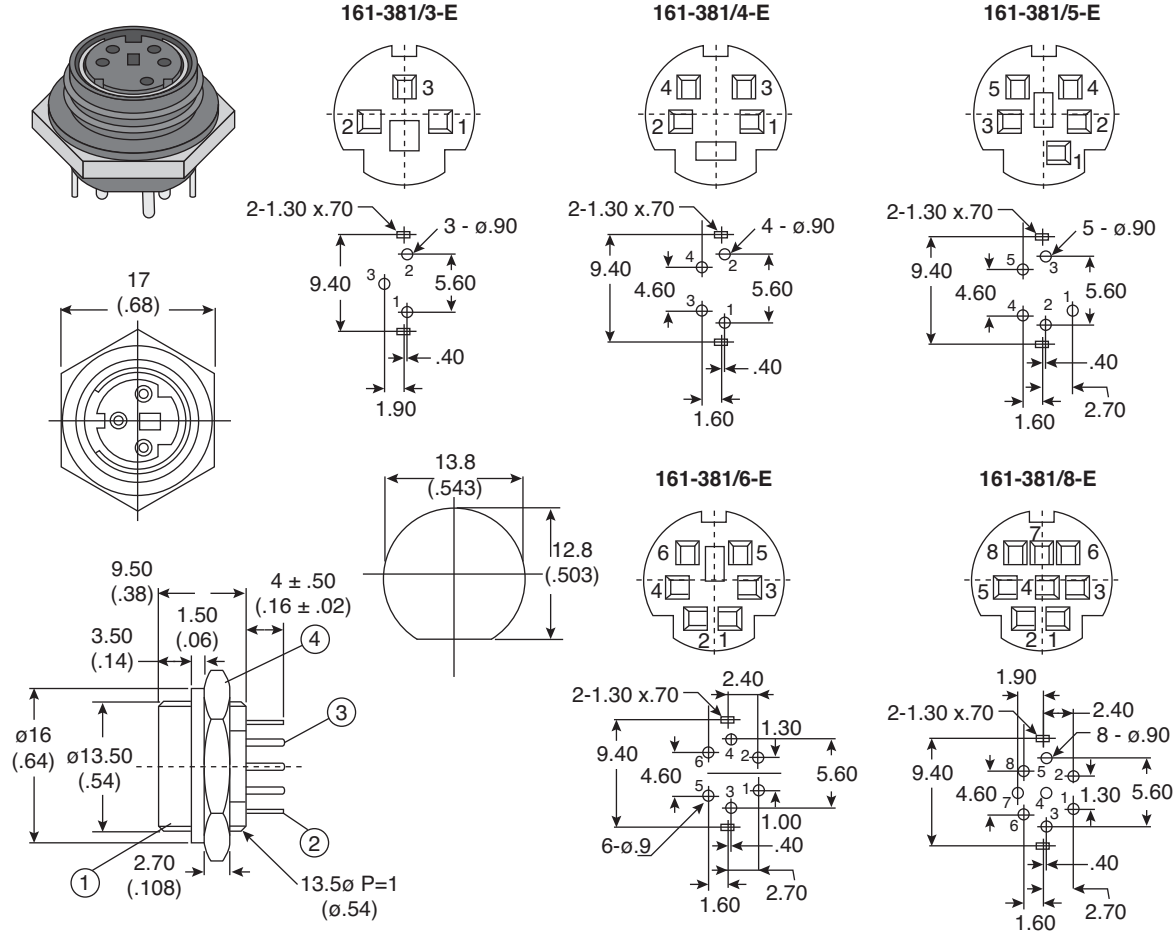

Dimensions: mm (in.)

LET	Part Name	Material	Finish
1	Housing	P.B.T.	-
2	Shield	Brass	Sn
3	Contact	Phosphor Bronze	Ag
4	Nut	Steel	Uni-Chrome

SPECIFICATIONS	
Insulation Resistance:	50M Ω Min. @250 VDC
Contact Resistance:	30m Max.
Dielectric Strength:	250 VAC for one minute
Insertion Force:	4.5 Kgf Max.
Extraction Force:	0.9 - 3 Kgf
RoHS Compliant	

Date Last Revised: 01-31-11

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC- 300868

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.