




Nennkapazität Nominal value Capacité nominal	Gehäuse Encapsulation / Boîtier			Teile-Nr. Part number Référence
	a ± 1	b ± 1	l-3	
0,047 µF	9	20	30	K015-050/502
0,068 µF	9	20	35	K015-150/502
0,1 µF	8	20	41	K015-250/502
0,2 µF	13	22	39	K015-350/502
0,3 µF	15	25	45	K015-450/502
0,39 µF	16	30	45	K015-550/502
0,47 µF	16	30	45	K015-650/502
Weitere Kapazitätswerte auf Anfrage Other values upon request / D'autres capacités sur demande				

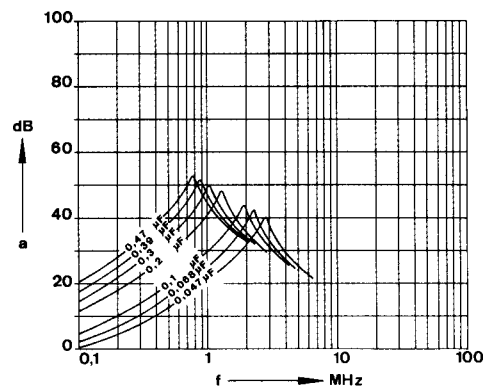

Einfügungsdämpfung
Insertion loss
Affaiblissement d'insertion

Nennspannung:
Rated voltage: 250 V \approx
Tension nominale:

Kapazitätsabweichung:
Capacitance tolerance: $\pm 20\%$
Tolérances des capacités:


Kondensatorklasse:
Capacitor class: X1
Classe de condensateur:

Gehäuse:
Encapsulation: Isolierbecher
Boîtier: plastic can
boîtier isolant


Klimakategorie:
Climatic category: 25/100/21
Catégorie d' climatique: (IEC 68-1)

Passive Entflammbarkeit:
Letter indicating passive
flammability category: C
Catégorie d' inflammabilité: (IEC 384-14/2)


Anschlüsse:

Cu-Litze Typ H05V-K 0,5 mm²,
(mit Prüfzeichen , AWG 20)
Anschlußenden abisoliert



Leads:

stranded copper wire type H05V-K 0.5 mm²,
(with Approval , AWG 20)
ends stripped

Connexions:

toron de cuivre type H05V-K 0,75 mm²,
(avec Homologations , AWG 20)
bouts dénudés

Prüfzeichen:
Approvals:
Homologations:

 EN 132 400
 IEC 384-14-2

