

## CMOS QUAD TRUE/COMPLEMENT BUFFER


### FEATURES

- ◆ Both True and Complement Outputs Available Simultaneously
- ◆ High Source and Sink Current
- ◆ Diode Protection on All Inputs

### DESCRIPTION

The 4041UB Quad True/Complement Buffer is a monolithic integrated circuit constructed with P-Channel and N-Channel enhancement-mode devices. The outputs have low resistance and are capable of sinking or sourcing high currents for use in driver applications where high noise immunity and low power dissipation are required.

This device is useful as a line-driver, CMOS-to-TTL driver, low-power resistor-network driver for A/D and D/A conversion, display and clock drivers.

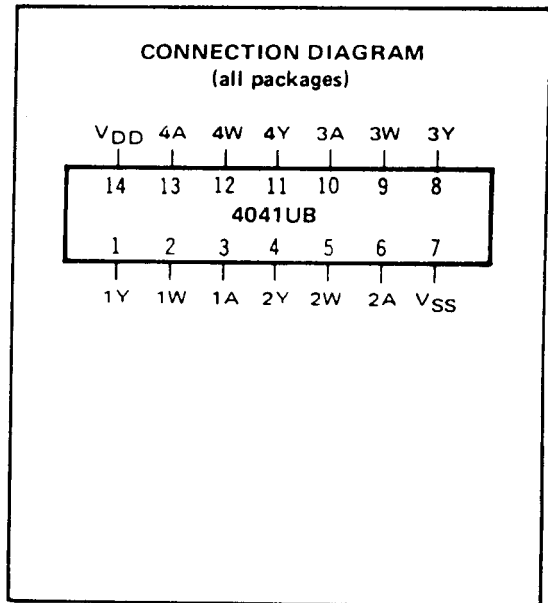


### RECOMMENDED OPERATING CONDITIONS


For maximum reliability:

DC Supply Voltage	V <sub>DD</sub> - V <sub>SS</sub>	3 to 15	V <sub>dc</sub>
Operating Temperature	T <sub>A</sub>		
C		-55 to +125	°C
E		-40 to +85	°C

**SCHEMATIC DIAGRAM**  
(one of four buffers)

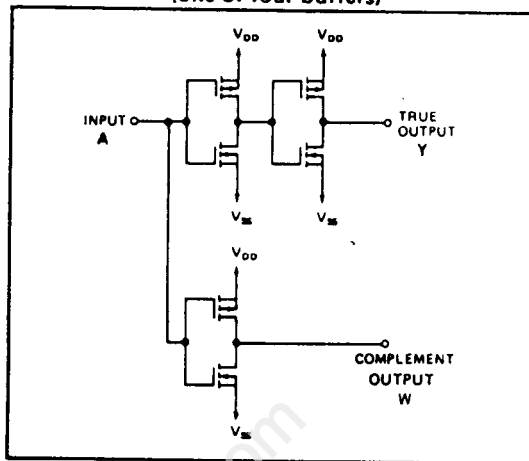

**LOGIC DIAGRAM**

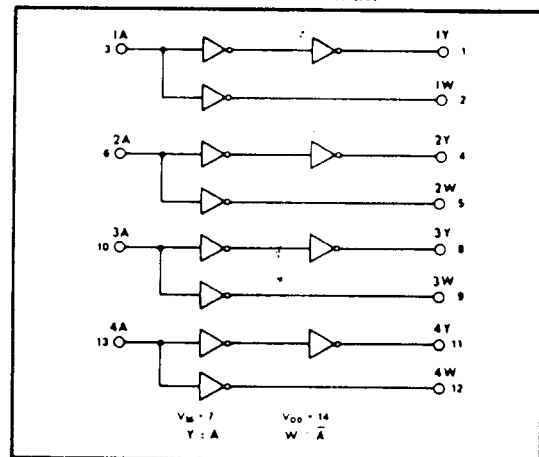

## ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS<sup>1</sup>

PARAMETER	V <sub>DD</sub> (Vdc)	CONDITIONS	T <sub>LOW</sub> <sup>2</sup>		+25°C			T <sub>HIGH</sub> <sup>2</sup>		Units		
			Min.	Max.	Min.	Typ.	Max.	Min.	Max.			
QUIESCENT DEVICE CURRENT	I <sub>DD</sub>	5	V <sub>IN</sub> =V <sub>SS</sub> or V <sub>DD</sub>	–	1.0	–	0.005	1.0	–	30	μAdc	
		10	All valid input combinations	–	2.0	–	0.01	2.0	–	60		
		15		–	4.0	–	0.02	4.0	–	120		
MINIMUM INPUT HIGH VOLTAGE	V <sub>IH</sub>	Non-Inverting Outputs										
		5	V <sub>OH</sub> =4.5V	–	3.5	–	2.75	3.5	–	3.5	Vdc	
		10	V <sub>OH</sub> =9.0V	–	7.0	–	5.5	7.0	–	7.0		
		15	V <sub>OH</sub> =13.5V  I <sub>O</sub>   < 1μA	–	11.0	–	8.25	11.0	–	11.0		
		Inverting Outputs										
		5	V <sub>OL</sub> =0.5V	–	4.0	–	2.75	4.0	–	4.0	Vdc	
10	V <sub>OL</sub> =1.0V	–	8.0	–	5.5	8.0	–	8.0				
15	V <sub>OL</sub> =1.5V  I <sub>O</sub>   < 1μA	–	12.0	–	8.25	12.0	–	12.0				
MAXIMUM INPUT LOW VOLTAGE	V <sub>IL</sub>	Non-Inverting Outputs										
		5	V <sub>OL</sub> =0.5V	1.5	–	1.5	2.25	–	1.5	–	Vdc	
		10	V <sub>OL</sub> =1.0V	3.0	–	3.0	4.5	–	3.0	–		
		15	V <sub>OL</sub> =1.5V  I <sub>O</sub>   < 1μA	4.0	–	4.0	6.75	–	4.0	–		
		Inverting Outputs										
		5	V <sub>OH</sub> =4.5V	1.0	–	1.0	2.25	–	1.0	–	Vdc	
10	V <sub>OH</sub> =9.0V	2.0	–	2.0	4.5	–	2.0	–				
15	V <sub>OH</sub> =13.5V  I <sub>O</sub>   < 1μA	3.0	–	3.0	6.75	–	3.0	–				
OUTPUT HIGH (SOURCE) CURRENT	I <sub>OH</sub>	Non-Inverting Outputs										
		5	V <sub>OH</sub> =4.6V	-1.7	–	-1.4	-2.8	–	-1.0	–	mAdc	
		10	V <sub>OH</sub> =9.5V	-5.0	–	-4.0	-8.0	–	-2.8	–		
		15	V <sub>OH</sub> =13.5V V <sub>IN</sub> =V <sub>DD</sub>	-16	–	-13	-26	–	-9	–		
		Inverting Outputs										
		5	V <sub>OH</sub> =4.6V	-0.75	–	-0.6	-1.0	–	-0.42	–	mAdc	
10	V <sub>OH</sub> =9.5V	-2.2	–	-1.8	-3.6	–	-1.3	–				
15	V <sub>OH</sub> =13.5V V <sub>IN</sub> =V <sub>SS</sub>	-8.0	–	-6.5	-13	–	-4.5	–				
OUTPUT LOW (SINK) CURRENT	I <sub>OL</sub>	Non-Inverting Outputs										
		5	V <sub>OL</sub> =0.4V	2.0	–	1.6	3.2	–	1.1	–	mAdc	
		10	V <sub>OL</sub> =0.5V	6.2	–	5.0	10	–	3.5	–		
		15	V <sub>OL</sub> =1.5V V <sub>IN</sub> =V <sub>SS</sub>	23	–	18.5	38	–	13	–		
		Inverting Outputs										
		5	V <sub>OL</sub> =0.4V	1.0	–	0.8	1.3	–	0.56	–	mAdc	
10	V <sub>OL</sub> =0.5V	2.5	–	2.0	4.0	–	1.4	–				
15	V <sub>OL</sub> =1.5V V <sub>IN</sub> =V <sub>DD</sub>	11	–	8.5	17	–	5.8	–				

NOTES: <sup>1</sup> Remaining Static Electrical Characteristics are listed under "4000B Series Family Specifications".


<sup>2</sup> T<sub>LOW</sub> = -55°C for C  
 = -40°C for E  
 T<sub>HIGH</sub> = +125°C for C  
 = + 85°C for E

## ELECTRICAL CHARACTERISTICS (Continued)


DYNAMIC CHARACTERISTICS ( $C_L = 50\text{pF}$ ,  $T_A = 25^\circ\text{C}$ )

PARAMETER		$V_{DD}$ (Vdc)	Min.	Typ.	Max.	Units	
PROPAGATION DELAY TIME Non-Inverting Outputs	$t_{PLH}, t_{PHL}$	5	—	60	120	ns	
		10	—	35	70		
		15	—	25	50		
	Inverting Outputs	$t_{PLH}, t_{PHL}$	5	—	60	120	ns
			10	—	35	70	
			15	—	25	50	
OUTPUT TRANSITION TIME Non-Inverting Outputs	$t_{TLH}, t_{THL}$	5	—	40	80	ns	
		10	—	20	40		
		15	—	15	30		
	Inverting Outputs	$t_{TLH}, t_{THL}$	5	—	35	70	ns
			10	—	20	40	
			15	—	15	30	
INPUT CAPACITANCE	$C_{IN}$	—	—	10	15	pF	

## NON-INVERTING (TRUE) OUTPUT

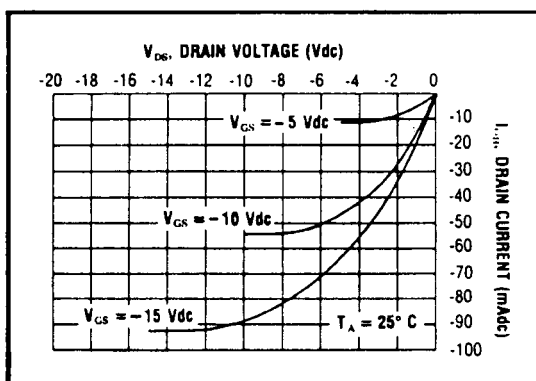


Typical P-Channel  
Source Current Characteristics

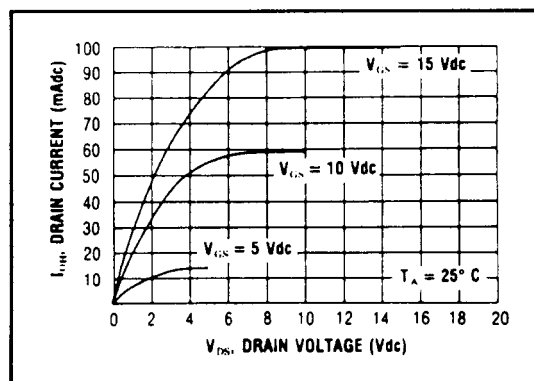


Typical N-Channel  
Sink Current Characteristics

## INVERTING (COMPLEMENT) OUTPUT

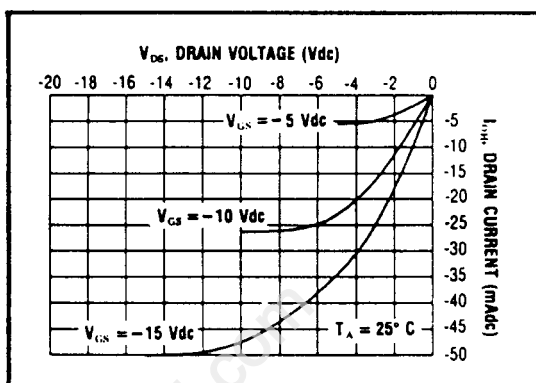


Typical P-Channel  
Source Current Characteristics

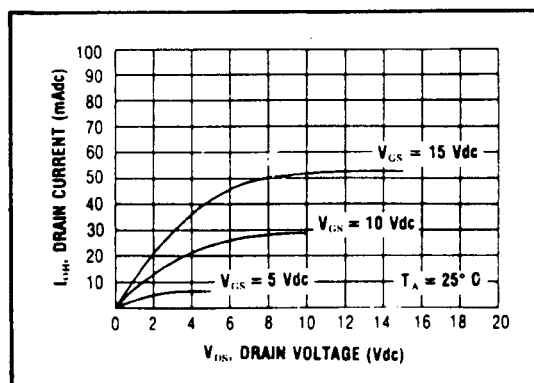


Typical N-Channel  
Sink Current Characteristics


4041UB

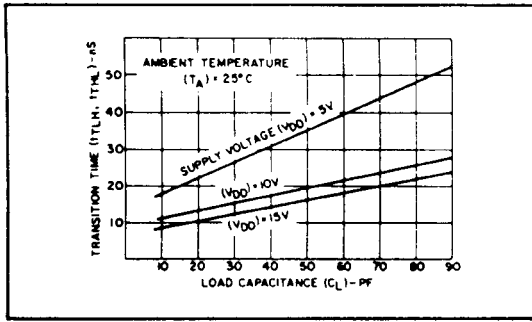


Typical transition time vs.  $C_L$ -true output.

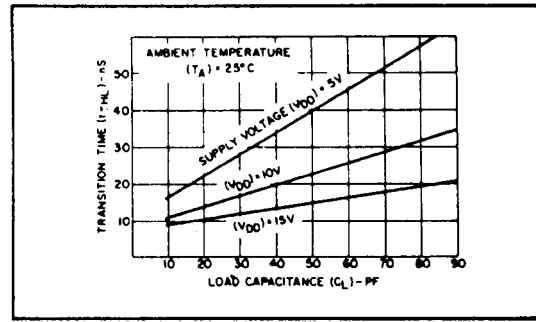

Typical transition time vs.  $C_L$ -complement output.

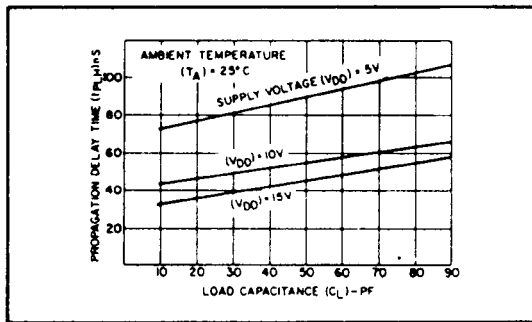


Typical propagation delay time vs.  $C_L$ -true output.

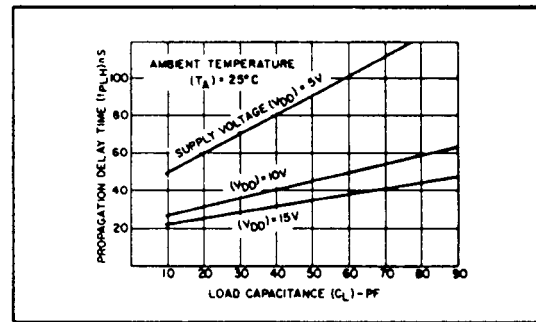

Typical propagation delay time vs.  $C_L$ -complement output.

APPLICATIONS INFORMATION

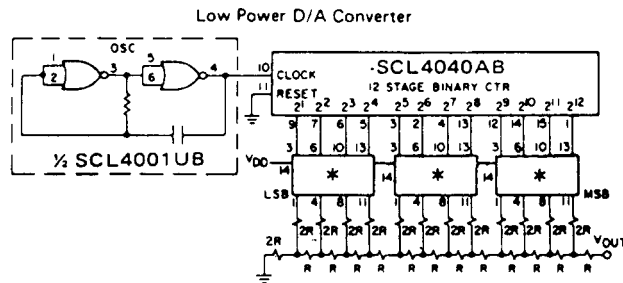

\* 4041UB

For resolution and accuracy of  $\pm 1/2$  least significant bit (LSB), choose the values for R (shown in Table I) where R equals the value of the external ladder resistor plus the switch source impedance.

The values have been tabulated for  $V_{DD} = 5V$  and  $V_{SS} = 0V$ . For different supply (reference) voltages, the switch source impedance must be computed and added to the value of R shown in Table I).

TABLE I. RESISTANCE VALUES AT  $V_{DD}-V_{SS} = 5V$ ,  $T_A = 25^\circ C$

RESOLUTION	ACCURACY OF 1/2 LSB	$R_{min}$ ( $\Omega$ )
4 bit	$\pm 3.25\%$ of full scale	35 k
6 bit	$\pm 0.8\%$ of full scale	14 k
8 bit	$\pm 0.2\%$ of full scale	56 k
10 bit	$\pm 0.05\%$ of full scale	224 k
12 bit	$\pm 0.0125\%$ of full scale	896 k

TABLE II. ON RESISTANCE VALUES AT  $V_{DS} = 0.1V$ ,  $T_A = 25^\circ C$

$V_{DD}-V_{SS}$ (Volts)	$R_N$ ( $\Omega$ )	$R_P$ ( $\Omega$ )
5	$175 \pm 50$	$200 \pm 75$
10	$75 \pm 25$	$90 \pm 30$