

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 15 circuits
- 0.64mm (.025") square wire pins

Reference Information

Packaging: Bulk

UL File No.: E29179

CSA File No.: LR19980

Mates With: 5051 housings, KK® 2.50mm (.098")

and 5102-N

Designed In: Millimeters

Electrical

Voltage: 250V

Current:

AWG	22	24	26	28
Amperes	3.0	2.5	2.0	1.5

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 1000V AC/1 min.

Insulation Resistance: 1000 MΩ min.

Physical

Housing: 6/6 nylon, UL 94V-0



Contact: Brass

Plating: See Table

Temperature: -40 to +105°C

molex® 2.50mm (.098") Pitch Header

5045 Vertical Polarizing Lock

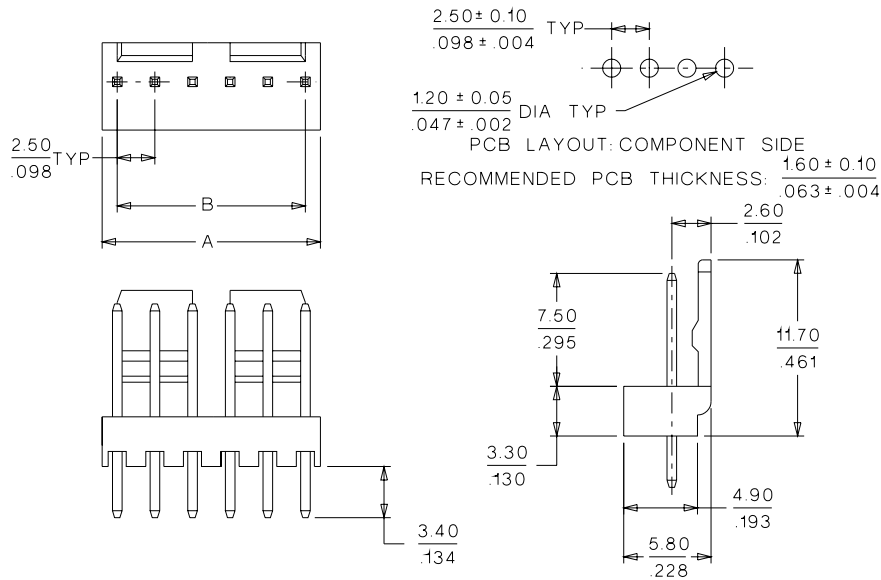

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.		Dimension	
	Tin	Gold	A	B
2	• 22-04-1021	22-11-1021	4.50 (.098)	2.50 (.177)
3	• 22-04-1031	22-11-1031	7.00 (.276)	5.00 (.197)
4	• 22-04-1041	22-11-1041	9.50 (.374)	7.50 (.295)
5	• 22-04-1051	22-11-1051	12.00 (.472)	10.00 (.394)
6	• 22-04-1061	22-11-1061	14.50 (.571)	12.50 (.492)
7	• 22-04-1071	22-11-1071	17.00 (.669)	15.00 (.591)
8	• 22-04-1081	22-11-1081	19.50 (.768)	17.50 (.689)
9	• 22-04-1091	22-11-1091	22.00 (.866)	20.00 (.787)
10	• 22-04-1101	22-11-1101	24.50 (.964)	22.50 (.886)
11	• 22-04-1111	22-11-1111	27.00 (1.063)	25.00 (.984)
12	• 22-04-1121	22-11-1121	29.50 (1.161)	27.50 (1.083)
13	• 22-04-1131	22-11-1131	32.00 (1.260)	30.00 (1.181)
14	• 22-04-1141	22-11-1141	34.50 (1.358)	32.50 (1.279)
15	• 22-04-1151	22-11-1151	37.00 (1.457)	35.00 (1.378)

• US Standard Product, available through Molex franchised distributors