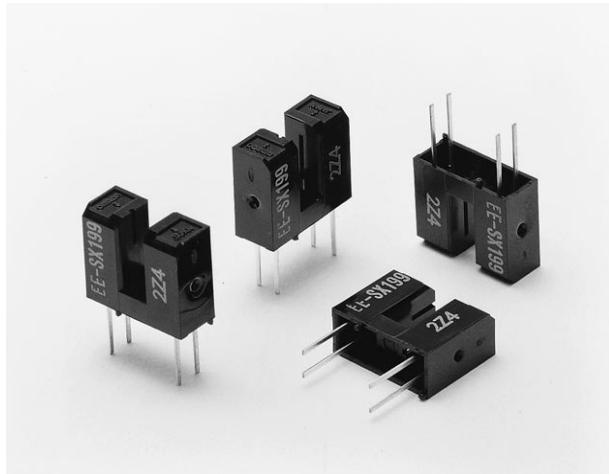
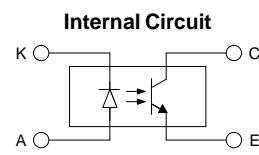
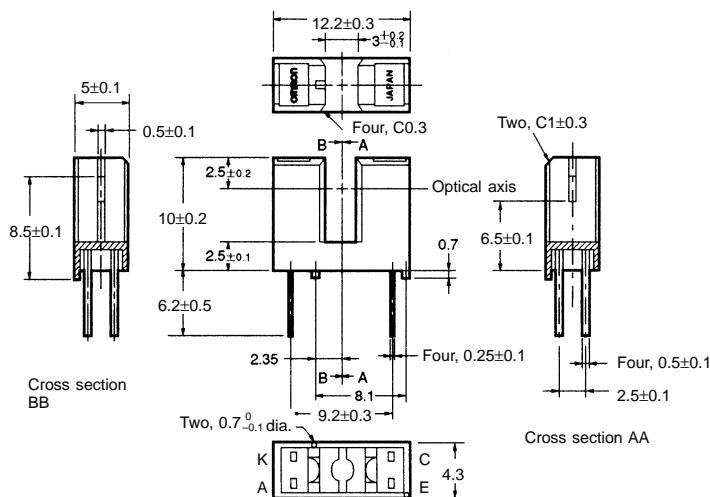



**Transmissive**

- Phototransistor output.
- General-purpose model with a 3-mm-wide slot.
- PCB mounting type.
- High resolution with a 0.5-mm-wide aperture.
- Incorporating location pins to prevent mis-orientation

**Dimensions**

Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

Unless otherwise specified,  
the tolerances are  $\pm 0.2$ .

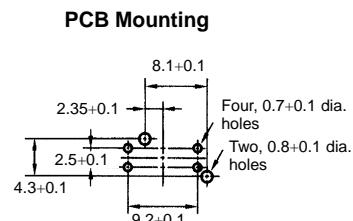**Specifications****Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )**

Item		Symbol	Rated value
Emitter	Forward current	$I_F$	50 mA (see note 1)
	Pulse forward current	$I_{FP}$	1 A (see note 2)
	Reverse voltage	$V_R$	4 V
Detector	Collector-Emitter voltage	$V_{CEO}$	30 V
	Emitter-Collector voltage	$V_{ECO}$	---
	Collector current	$I_C$	20 mA
	Collector dissipation	$P_C$	100 mW (see note 1)
Ambient temperature	Operating	$T_{opr}$	-25°C to 85°C
	Storage	$T_{stg}$	-30°C to 100°C
	Soldering	$T_{sol}$	260°C

Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.

2. The pulse width is 10  $\mu\text{s}$  maximum with a frequency of 100 Hz.


## ■ Electrical and Optical Characteristics (Ta = 25°C)

[www.DataSheet4U.com](http://www.DataSheet4U.com)


Item	Symbol	Value	Condition
Emitter	Forward voltage	V <sub>F</sub>	1.2 V typ., 1.4 V max. I <sub>F</sub> = 30 mA
	Reverse current	I <sub>R</sub>	0.01 μA typ., 10 μA max. V <sub>R</sub> = 4 V
	Peak emission wavelength	λ <sub>P</sub>	940 nm typ. I <sub>F</sub> = 20 mA
Detector	Light current	I <sub>L</sub>	0.5 mA min., 14 mA max. I <sub>F</sub> = 20 mA, V <sub>CE</sub> = 5 V
	Dark current	I <sub>D</sub>	2 nA typ., 100 nA max. V <sub>CE</sub> = 20 V, 0 lx
	Leakage current	I <sub>LEAK</sub>	---
	Collector-Emitter saturated voltage	V <sub>CE</sub> (sat)	0.1 V typ., 0.4 V max. I <sub>F</sub> = 40 mA, I <sub>L</sub> = 0.5 mA
	Peak spectral sensitivity wavelength	λ <sub>P</sub>	850 nm typ. V <sub>CE</sub> = 10 V
Rising time	tr	4 μs typ.	V <sub>CC</sub> = 5 V, R <sub>L</sub> = 100 Ω, I <sub>L</sub> = 5 mA
Falling time	tf	4 μs typ.	V <sub>CC</sub> = 5 V, R <sub>L</sub> = 100 Ω, I <sub>L</sub> = 5 mA

## Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

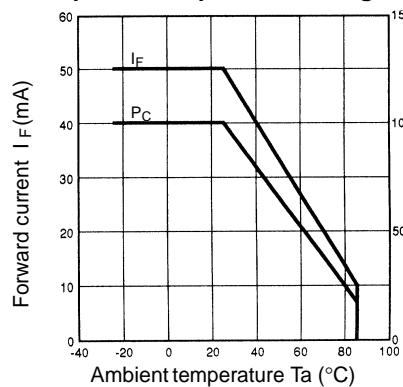


Forward Current vs. Forward Voltage Characteristics (Typical)

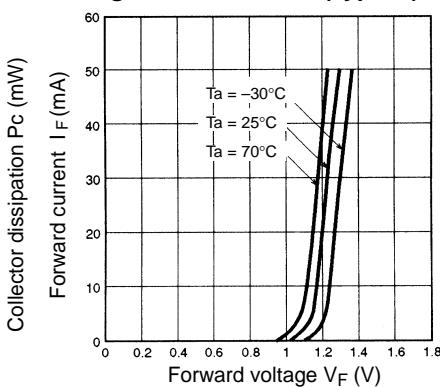


Light Current vs. Forward Current Characteristics (Typical)

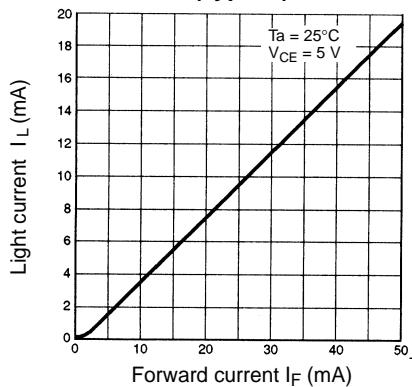


Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

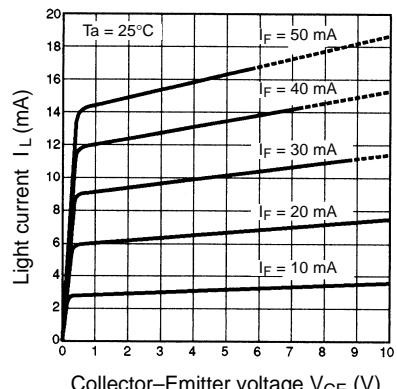


Relative Light Current vs. Ambient Temperature Characteristics (Typical)

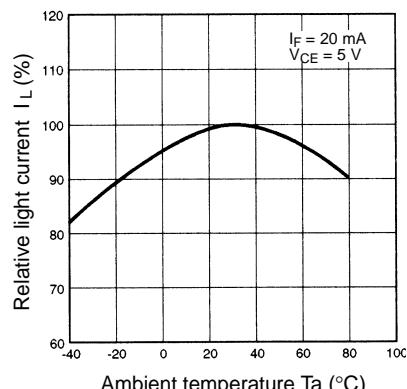


Response Time vs. Load Resistance Characteristics (Typical)

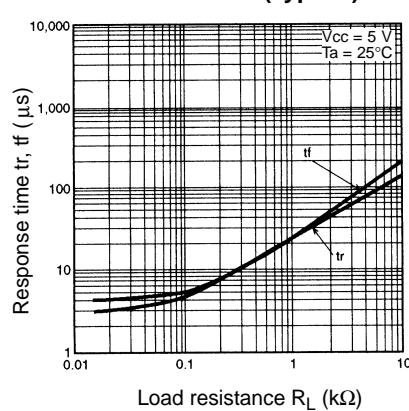

Sensing Position Characteristics (Typical)

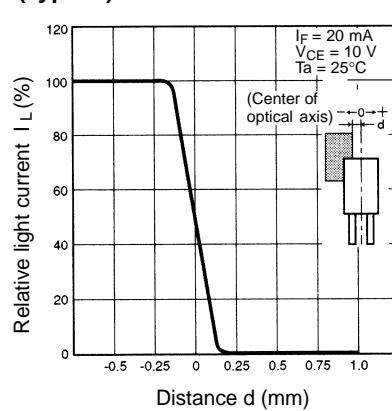

Dark Current vs. Ambient Temperature Characteristics (Typical)

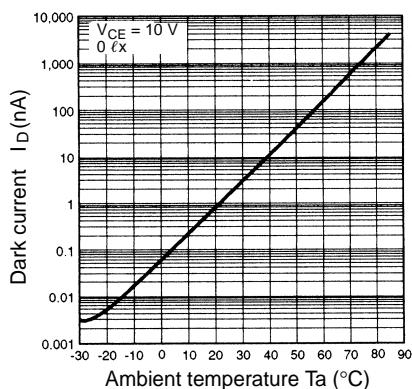

Response Time Measurement Circuit

