


## Helping Customers Innovate, Improve & Grow

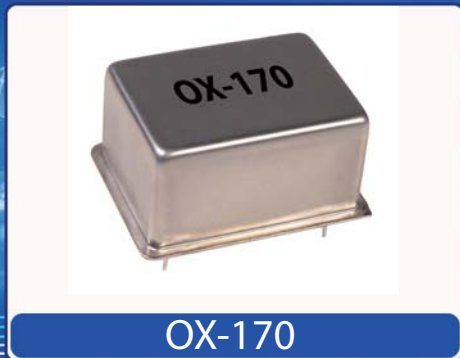

### Features

- Reflow Process Compatible
- AT-CUT and SC\_CUT Crystal Options
- Low Profile Compact Package

### Applications

- Base stations
- Test equipment
- Synthesizers
- Military communication equipment
- Digital Switching

## Performance Specifications

| Frequency Stabilities <sup>1</sup> (AT-Cut Crystal-Standard - ) |      |         |      |         |  |                      |
|---|------|---------|------|---------|--|----------------------|
| Parameter   | Min  | Typical | Max  | Units   | Condition  | Options <sup>5</sup> |
| vs. operating temperature range<br>(referenced to +25°C)        | -30  |         | +30  | ppb     | 0 to +70°C   |                      |
|   | -80  |         | +80  | ppb     | -20 to +70°C   |                      |
|   | -100 |         | +100 | ppb     | -20 to +70°C   |                      |
|   | -200 |         | +200 | ppb     | -40 to +85°C   |                      |
| Initial tolerance   | -0.3 |         | +0.3 | ppm     | at time of shipment, nominal EFC                       |                      |
| vs. supply voltage change                                       | -5   |         | +5   | ppb     | V <sub>s</sub> ±5% static                              |                      |
| vs. load change   | -5   |         | +5   | ppb     | Load ±5% static  |                      |
| vs. aging / day   | -2   |         | +2   | ppb     | after 30 days of operation                             |                      |
| vs. aging / year  | -500 |         | +500 | ppb     | after 30 days of operation                             |                      |
| vs. aging / year (following year)                               | -250 |         | +250 | ppb     | after 30 days of operation                             |                      |
| Warm-up time  |      |         | 5    | minutes | to ±100ppb of final frequency (1 hour reading) @ +25°C |                      |
| Frequency Stabilities <sup>1</sup> (SC-Cut Crystal-Option)      |      |         |      |         |  |                      |
| vs. operating temperature range<br>(referenced to +25°C)        | -10  |         | +10  | ppb     | 0 to +70°C   |                      |
|   | -10  |         | +10  | ppb     | -20 to +70°C   |                      |
|   | -20  |         | +20  | ppb     | -20 to +70°C   |                      |
|   | -30  |         | +30  | ppb     | -40 to +85°C   |                      |
| Initial tolerance   | -0.1 |         | +0.1 | ppm     | at time of shipment, nominal EFC                       |                      |
| vs. supply voltage change                                       | -5   |         | +5   | ppb     | V <sub>s</sub> ±5% static                              |                      |
| vs. load change   | -5   |         | +5   | ppb     | Load ±5% static  |                      |
| vs. aging / day   | -1   |         | +1   | ppb     | after 30 days of operation                             |                      |
| vs. aging / year  | -100 |         | +100 | ppb     | after 30 days of operation                             |                      |
| vs. aging / year (following year)                               | -50  |         | +50  | ppb     | after 30 days of operation                             |                      |
| Warm-up time  |      |         | 5    | minutes | to ±100ppb of final frequency (1 hour reading) @ +25°C |                      |

| Supply Voltage (Vs)             |                            |         |       |        |                                  |                           |
|---------------------------------|----------------------------|---------|-------|--------|----------------------------------|---------------------------|
| Parameter                       | Min                        | Typical | Max   | Units  | Condition                        |                           |
| Supply voltage (standard)       | 3.135                      | 3.3     | 3.465 | VDC    |                                  |                           |
|                                 | 4.75                       | 5.0     | 5.25  | VDC    |                                  |                           |
|                                 | 11.4                       | 12.0    | 12.6  | VDC    |                                  |                           |
| Power consumption               |                            |         | 3.5   | Watts  | during warm-up                   |                           |
|                                 |                            |         | 1.0   | Watts  | steady state @ +25°C             |                           |
| RF Output                       |                            |         |       |        |                                  |                           |
| Signal [standard]               | HCMOS                      |         |       |        |                                  |                           |
| Load                            |                            | 15      |       | pF     |                                  |                           |
| Signal Level (Vol)              |                            |         | 0.4   | VDC    | with Vs=3.3V and 15pF Load       |                           |
| Signal Level (Vol)              |                            |         | 0.5   |        | with Vs=5.0V & 12V and 15pF Load |                           |
| Signal Level (Voh)              | 2.4                        |         |       | VDC    | with Vs=3.3V and 15pF Load       |                           |
| Signal Level (Voh)              | 3.5                        |         |       |        | with Vs=5.0V & 12V and 15pF Load |                           |
| Duty Cycle                      | 45                         |         | 55    | %      | @ (Voh-Vol)/2                    |                           |
| Signal                          | Sine Wave                  |         |       |        |                                  |                           |
| Load                            |                            | 50      |       | Ω      |                                  |                           |
| Output Power @3,3V              | 2                          | 5       | 8     | dBm    | 50 Ω load                        |                           |
| Putput Power @ 5.0V             | 5                          | 8       | 11    | dBm    | 50 Ω load                        |                           |
| Harmonics                       |                            |         | -30   | dBm    | 50 Ω load                        |                           |
| Frequency Tuning (EFC)          |                            |         |       |        |                                  |                           |
| Tuning Range                    | Fixed OCXO; No adjust      |         |       |        | Option <sup>5</sup>              |                           |
| Tuning Range                    | ±3.0                       |         | ±8    | ppm    |                                  | with AT cut crystal       |
|                                 | ±0.75                      |         | ±2.0  | ppm    |                                  | with SC cut crystal       |
| Linearity                       | 10%                        |         |       |        |                                  |                           |
| Tuning Slope                    | Positive                   |         |       |        |                                  |                           |
| Control Voltage Range           | 0.0                        | 1.4     | 2.8   | VDC    | with Vs=3.3V                     |                           |
|                                 | 0.0                        | 2.0     | 4.0   |        | with Vs=5.0V                     |                           |
|                                 | 0.0                        | 2.0     | 4.0   | VDC    | with Vs=12.0V                    |                           |
| Reference Voltage Output (Vref) |                            |         |       |        |                                  |                           |
| Reference Voltage               | 2.75                       | 2.8     | 2.85  | VDC    | with Vs = 3.3 VDC                |                           |
|                                 | 3.92                       | 4.0     | 4.08  | VDC    | with Vs = 5.0 VDC                |                           |
|                                 | 4.9                        | 5.0     | 5.1   | VDC    | with Vs =12 VDC                  |                           |
| Additional Parameters           |                            |         |       |        |                                  |                           |
| Phase Noise <sup>3</sup>        |                            |         | -90   | dBc/Hz | 1 Hz                             | @ 10MHz<br>with SC<br>Cut |
|                                 |                            |         | -120  | dBc/Hz | 10 Hz                            |                           |
|                                 |                            |         | -140  | dBc/Hz | 100 Hz                           |                           |
|                                 |                            |         | -145  | dBc/Hz | 1 kHz                            |                           |
|                                 |                            |         | -150  | dBc/Hz | 10 kHz                           |                           |
| Phase Noise <sup>3</sup>        |                            |         | -75   | dBc/Hz | 1 Hz                             | @ 10MHz<br>with AT<br>Cut |
|                                 |                            |         | -105  | dBc/Hz | 10 Hz                            |                           |
|                                 |                            |         | -130  | dBc/Hz | 100 Hz                           |                           |
|                                 |                            |         | -140  | dBc/Hz | 1 kHz                            |                           |
|                                 |                            |         | -150  | dBc/Hz | 10 kHz                           |                           |
| Weight                          |                            |         | 14    | g      |                                  |                           |
| Processing & Packing            | Handling & Processing Note |         |       |        |                                  |                           |


### Absolute Maximum Ratings

|                            |     |  |      |    |                      |
|----------------------------|-----|--|------|----|----------------------|
| supply voltage (Vs)        |     |  | 6.5  | V  | with Vs=3.3 & 5.0VDC |
|                            |     |  | 15.0 | V  | with Vs= 12 VDC      |
| Output Load                |     |  | 50   | pF |                      |
| Operable Temperature Range | -55 |  | +85  | °C |                      |
| Storage Temperature Range  | -55 |  | +125 | °C |                      |

www.DataSheet4U.com



### Outline Drawing / Enclosure

G157

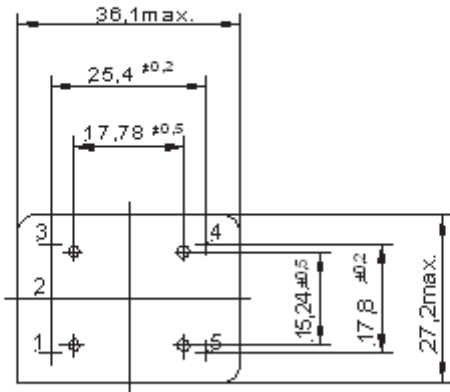


| OX-170     |                |
|------------|----------------|
| Height "H" | Pin Length "L" |
| 12.2       | 4.5 mm min     |
| 13.5       | 4.5 mm min     |
| 15.2       | 4.5 mm min     |
| 18.2       | 4.5 mm min     |

| Pin Connections |  |
|-----------------|--|
| 1               | Electronic Frequency Control Input (EFC) |
| 2               | Reference Voltage Option                 |
| 3               | Supply Voltage Input (VS)                |
| 4               | RF Output                                |
| 5               | Ground (Case)                            |

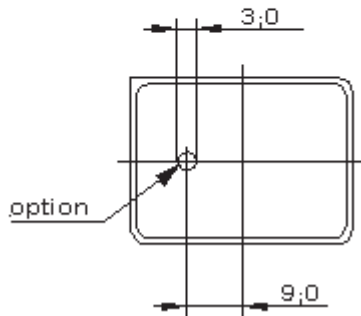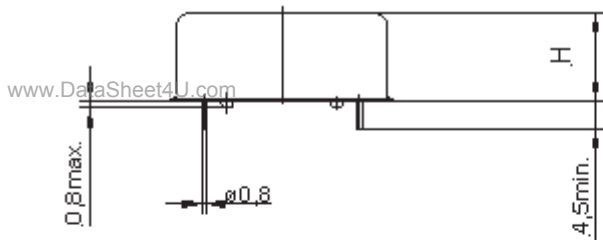

Dimensions in mm

## Ordering Information

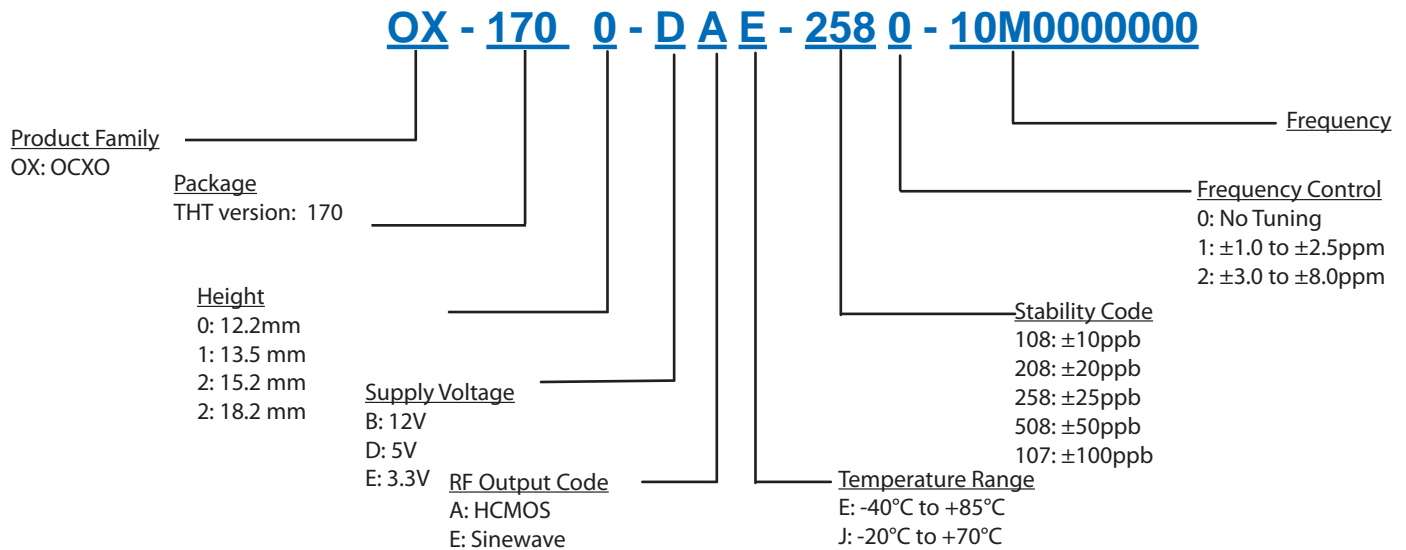**Notes:**

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

www.DataSheet4U.com

## For Additional Information, Please Contact

**USA:**

Vectron International  
267 Lowell Road  
Hudson, NH 03051  
Tel: 1.888.328.7661  
Fax: 1.888.329.8328

**Europe:**

Vectron International  
Landstrasse, D-74924  
Neckarbischofsheim, Germany  
Tel: +49 (0) 3328.4784.17  
Fax: +49 (0) 3328.4784.30

**Asia:**

Vectron International  
1F-2F, No 8 Workshop, No 308 Fenju Road  
WaiGaoQiao Free Trade Zone  
Pudong, Shanghai, China 200131  
Tel: 86.21.5048.0777  
Fax: 86.21.5048.1881

**Disclaimer**

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 12Feb2009