

Axial Lead and Cartridge Fuses

Glass Body

3.6 x 10 mm Slo-Blo® Fuse 673 Series



- Designed to UL/CSA 248 Standard.
- Slo-Blo, glass body fuse in a compact package.
- This space saving fuse is ideally suited for lighting, power supply, and adapter applications.

ELECTRICAL CHARACTERISTICS:

| % of Ampere Rating | Opening Time |
|--------------------|------------------|
| 100% | 4 hours, Minimum |
| 200% | 60 seconds, Max. |

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA from 0.050 through 10 Amps.

INTERRUPTING RATING:


50A@250V AC

PACKAGING OPTIONS:


Please refer to the following suffixes when ordering:
 Bulk (1000 pieces): Add MXE suffix to the catalog part number.
 Tape and Reel (1500 pieces): Add DRT4 suffix to the catalog part number.

TAPE AND REEL SPECIFICATIONS:

Per EIA-296 with 10mm pitch and 56.5mm inside tape spacing.

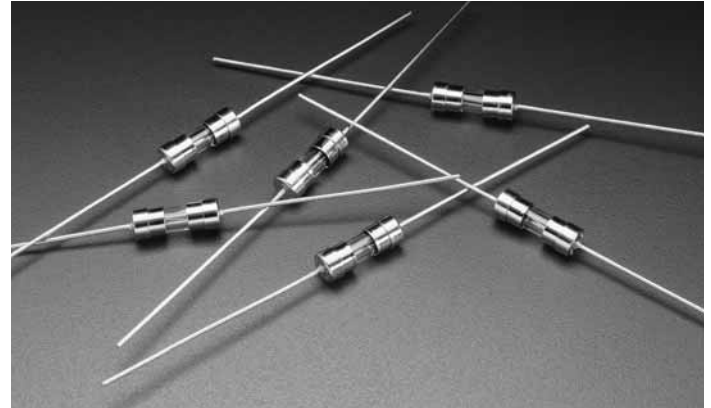

673 000 Series

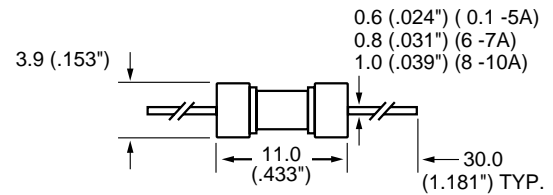


Axial Lead Material: Solder coated copper.

ORDERING INFORMATION:

| Catalog Number | Ampere Rating | Voltage Rating | Nominal Resistance Cold mOhms | Nominal Melting i^2t A ² Sec. |
|----------------|---------------|----------------|-------------------------------|--|
| 0673.100 | .100 | 250 | 7.5300 | 0.00250 |
| 0673.125 | .125 | 250 | 2.9850 | 0.00370 |
| 0673.200 | .200 | 250 | 2.5280 | 0.0161 |
| 0673.250 | .250 | 250 | 1.7700 | 0.0252 |
| 0673.300 | .300 | 250 | 1.1880 | 0.0332 |
| 0673.400 | .400 | 250 | 0.3140 | 0.0735 |
| 0673.500 | .500 | 250 | 0.2250 | 0.137 |
| 0673.600 | .600 | 250 | 0.1550 | 0.482 |
| 0673.800 | .800 | 250 | 0.1120 | 0.949 |
| 0673 001 | 1.00 | 250 | 0.0940 | 1.22 |
| 0673 01.5 | 1.50 | 250 | 0.0515 | 3.52 |
| 0673 01.6 | 1.60 | 250 | 0.0494 | 3.75 |
| 0673 002. | 2.00 | 250 | 0.0410 | 6.56 |
| 0673 02.5 | 2.50 | 250 | 0.0344 | 9.19 |
| 0673 003. | 3.00 | 250 | 0.0247 | 18.4 |
| 0673 004. | 4.00 | 250 | 0.0191 | 28.6 |
| 0673 005. | 5.00 | 250 | 0.0114 | 58.6 |
| 0673 006. | 6.00 | 250 | 0.0095 | 77.2 |
| 0673 007. | 7.00 | 250 | 0.0084 | 94.7 |
| 0673 008. | 8.00 | 250 | 0.0077 | 114.0 |
| 0673 010. | 10.0 | 250 | 0.0070 | 224.0 |

Average Time Current Curves

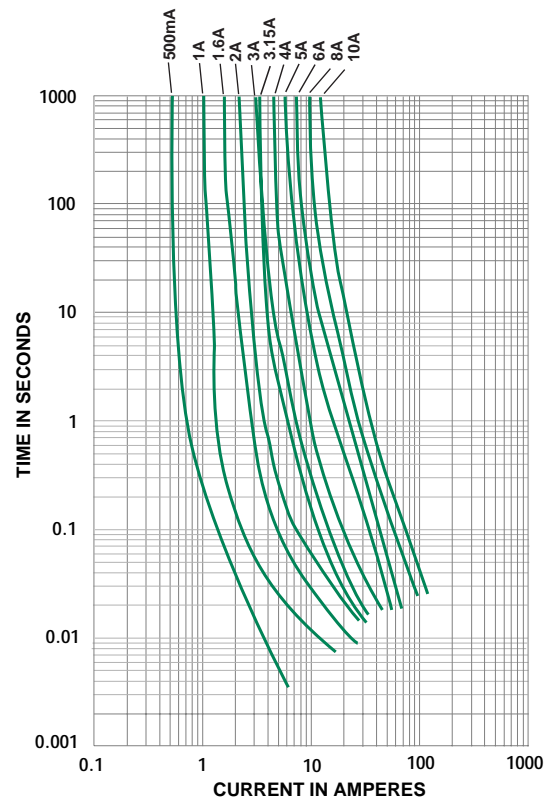

11
AXIAL LEAD AND CARTRIDGE FUSES