





FERROXCUBE









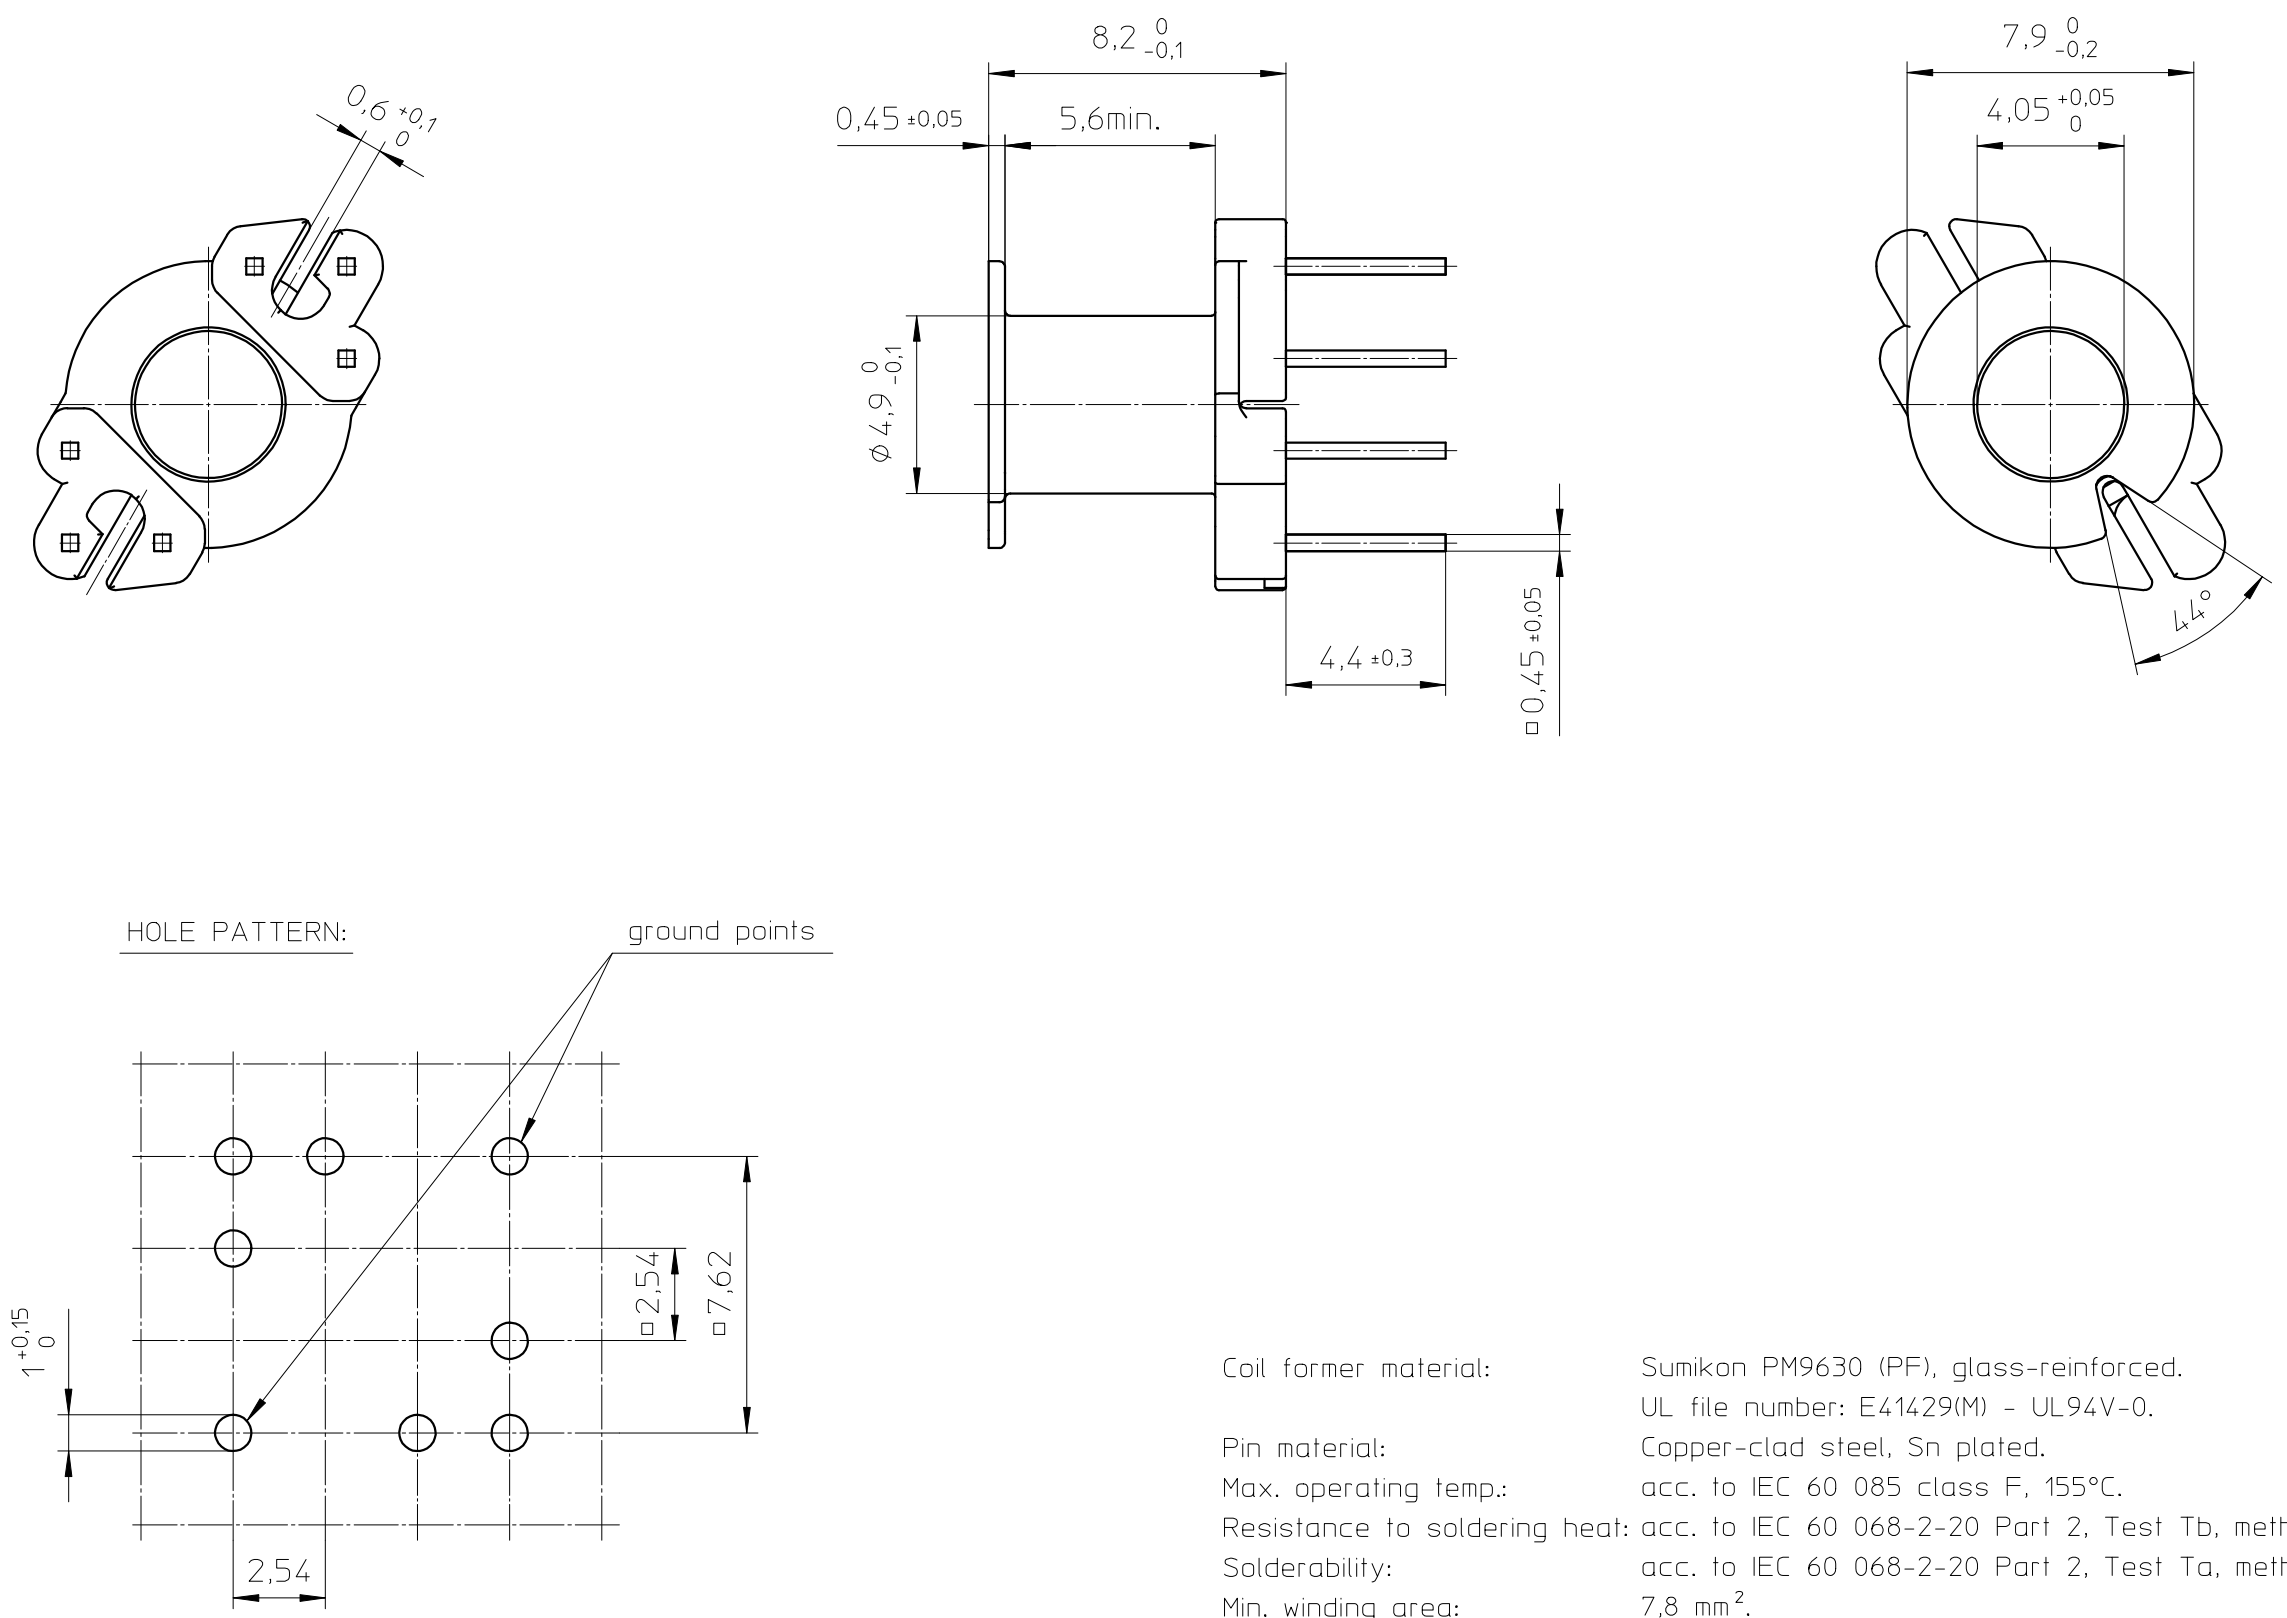

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material: Copper-clad steel, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 35s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s

Min. winding area: 7,8 mm².

Mean length of turn: 19,8 mm.

CLASS.NO.		2005-08-11	
		2005-09-15	
NAME		M.Veekens	
NAAM			
MPA			
CHECK		001	
CONTR.		SH SH 112 - 001	
DAT.		2005-08-11	
Property of		© FERROXCUBE 2000	
		069	
		A3	