


HOLE PATTERN:

Space requirement 5x5 pitch.

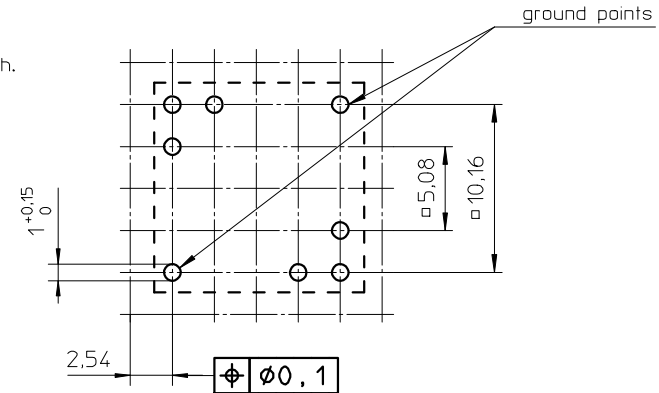

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.  
 UL file number: E61040 - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 9,2 mm<sup>2</sup>.  
 Mean length of turn: 24,9 mm.

CLASSNO.		97-04-18	
90-01-26		00-05-02	
NAME M. Veekens		00-08-01	
SUPERV. VERV.		03-06-30	
MPA		05-09-01	
CHECK CONTR.		112 - 001	
DAT. 89-04-03		010	
Property of Eigendom van		A3	
© FERROXCUBE 2000			

CSV-RM5-2S-6P

4322 021 34501