



中国·人民电器集团  
PEOPLE ELE. APPLIANCE GROUP CHINA

POWER RELAY

## POWER RELAY



**JZC-22F**

Size(mm): 19.3×16.8×21

Terminal layout: 1Z, 1H


Contact capacity: 5A 7A 12A 15A  
125VAC 287VDC

Contact resistance:  $\leq 50m\Omega$

Insulation resistance:  $\geq 100M\Omega$

Dielectric strength: BOC 500VAC

BCC 1500VAC

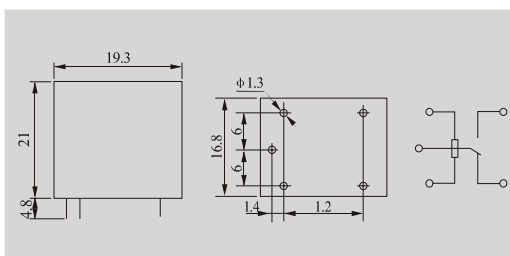

### JZC-23F(4123)



**JZC-23F(4123)**

Size(mm): 20.8×16.1×16.8

Terminal layout: 1Z, 1H


Contact capacity: 10A 125VAC

Contact resistance:  $\leq 50m\Omega$

Insulation resistance:  $\geq 100M\Omega$

Dielectric strength: BOC 500VAC

BCC 1500VAC

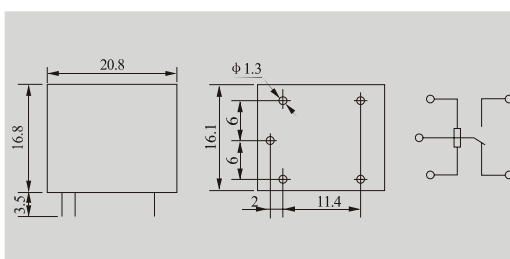

### JQC-8F(T76)



**JQC-8F(T76)**

Size(mm): 22.5×16.8×11.1

Terminal layout: 1Z, 1H

Contact capacity: 20A 125VAC


10A 220VDC

Contact resistance:  $\leq 50m\Omega$

Insulation resistance:  $\geq 500M\Omega$

Dielectric strength: BOC 1000VAC

BCC 1500VAC

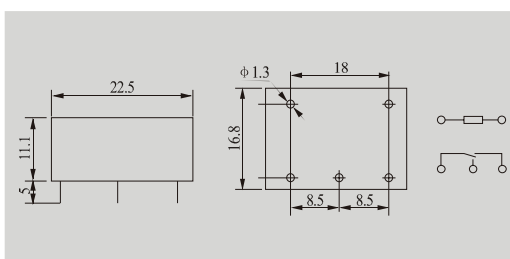

### JQX-15F(T90)



**JQX-15F(T90)**

Size(mm): 32.5×27.5×20.5

Terminal layout: 1Z, 1H

Contact capacity: 30A 28VDC

30A 125VAC


20A 220VAC

Contact resistance:  $\leq 50m\Omega$

Insulation resistance:  $\geq 500M\Omega$

Dielectric strength: BOC 1000VAC

BCC 1500VAC

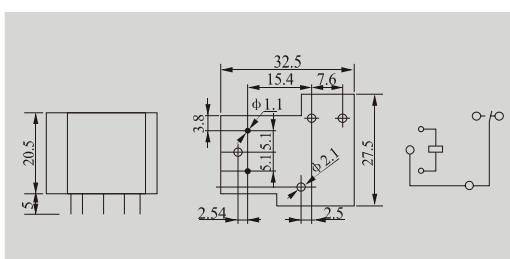

Model	Coil nominal voltage	Coil nominal power	Electrical life	Mechanical life	Operating temperature	Weight	Mounting methods
JZC-22F	DC 3 to 48V	DC $\leq 0.45W$	$10^5$ OPS	$10^6$ OPS	-25°C~40°C	$\leq 13g$	Printed-circuit board
JZC-23F(4123)	DC 3 to 48V	DC $\leq 0.36W$	$10^5$ OPS	$10^6$ OPS	-40°C~55°C	$\leq 10g$	Printed-circuit board
JQC-8F(T76)	DC 3 to 48V	DC $\leq 0.2W$	$10^5$ OPS	$10^7$ OPS	-40°C~45°C	$\leq 11g$	Printed-circuit board
JQX-15F(T90)	DC 3 to 110V	DC $\leq 0.93W$	$10^5$ OPS	$10^7$ OPS	-40°C~85°C	$\leq 24g$	Printed-circuit board