



Plastic enclosure suited for non-illuminated push buttons with maximum 2 contact elements.

REVISION FOR DWG #			1PB-4-001-Q-10		
REV	CH.NO.		DESCRIPTION	DATE	REVISED BY
-	-		ORIGINAL DESIGN	11/2/2007	PHILIPP E.

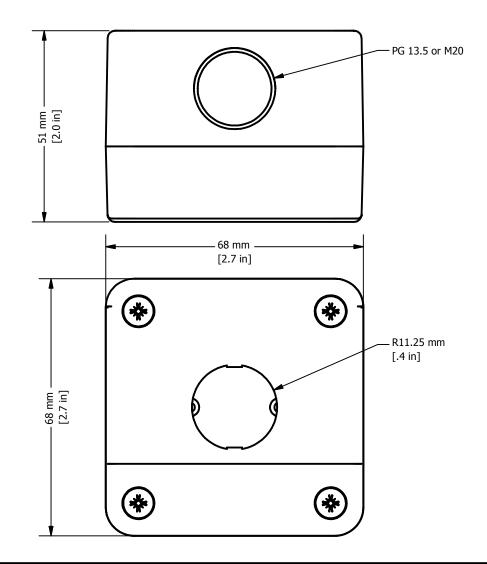



- ALL DIMENSIONS ARE IN MILLIMETERS
  THIRD ANGLE PROJECTION
- THIRD ANGLE PROJECTION

 $\begin{array}{llll} \text{TOLERANCE} & & & \\ \text{XX} & = & \pm 1 \text{ mm} \\ \text{XX.X} & = & \pm 0.5 \text{ mm} \\ \text{XX.XX} & = & \pm 0.2 \text{ mm} \\ \text{ALL} & = & - \text{ mm} \end{array}$ 

This Drawing is the property of

Alfred Corp

35 Royal Road Flemington, NJ 08822-6000 (908) 806-9400 Fax (908) 806-9490 AND IS A CONFIDENTIAL DISCLOSURELENT WITHOUT CONSIDERATION OTHER THAN THE BORROWER'S AGREEMENT THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED.

## 22 mm Thermoplastic Enclosure White/Black Operator Capacity 1 4-001-Q-10

DRAWN BY: Philipp Ernstberger	11/2/2007	DRAWING NO.:					
CHECKED BY: Laszlo Gyorgypal	11/2/2007	1PB-4-001-Q-10					
RELEASED BY: Laszlo Gyorgypal	11/2/2007	SCALE:	-	SHEET: 1	OF: 1		