

Vishay Dale

## Plasma Panel Display Modules

320 x 64 Graphics Display with Drive Electronics  
TTL Level Data Interface and Integrated DC Converter



**FEATURES**

- TTL level video interface
- On board DC converter
- Slim profile
- Large, bright characters and graphics
- Highly visible for long distance viewing

The APD-320G064 DC Plasma display offers viewing qualities designers seek such as high contrast, viewing angle of 150° minimum, and long distance readability. It is bright (50 foot lamberts minimum) with characters and graphics figures presented in a pleasing neon orange color against a black background. Plasma is much more readable and eye-pleasing than liquid crystal or vacuum fluorescent displays and is filterable to red, amber, or neutral density.

These plasma display panels are driven in a standard row - column refresh method much like a CRT display. The designer need only supply TTL level signals for SERIAL DATA, DOT CLOCK, COLUMN LATCH, ROW DATA, ROW CLOCK and DISPLAY ENABLE. The SERIAL DATA is entered with the DOT CLOCK up to frequencies as high as 8mHz. After a row of 320 pixels is clocked in, the COLUMN LATCH signal is toggled and the data is latched. At the time the data is latched, the display is briefly disabled using the DISPLAY ENABLE signal, then the row pointer is advanced with the ROW CLOCK signal. Once each frame the ROW DATA must be asserted to synchronize the column serial data with the beginning row. The recommended scanning frequency is approximately 70 Hz but may be as high as 200 Hz. The high clock rate on the data clock allows for rapid refresh and maximum access time to the refresh ram.

**ELECTRICAL SPECIFICATIONS**

**Voltages Required:** VDC: + 12 to + 24 VDC.

V<sub>cc</sub>: + 5 VDC.

**Power Required:** Typical = 12 watts.

Maximum = 60 watts.

**OPTICAL SPECIFICATIONS**

**Viewing Area:** 20.45" [519.43mm] W x 4.19" [106.43mm] H.

**Pixel Pitch:** 0.064" [1.63mm] H, 0.066" [1.676mm] V.

**Pixel Size:** 0.025" x 0.040" [0.635mm x 1.016mm].

**Character Array:** 8 x 8: 40 x 16. 6 x 8: 53 x 16.


**Character Size:** 0.396" [10.06mm] W x 0.528" [13.41mm] H

**Luminance:** 50 foot lamberts minimum.

STANDARD ELECTRICAL SPECIFICATIONS*					
DESCRIPTION	SYMBOL	MIN.	TYP.	MAX.	UNITS
Logic supply	V <sub>cc</sub>	+ 4.5	+ 5.0	+ 5.5	VDC
DC converter input	VDC	+ 10.0	+ 24.0	+ 28.0	VDC
DC converter power @ + 12 V	Amps	Screen Clear 0.100	50% Lit 2.0	100% Lit 5.0	—
Logic 1 Input	V <sub>ih</sub>	2.0	—	—	VDC
Logic 0 Input	V <sub>il</sub>	—	—	0.8	VDC

\* Recommended operating voltages. All maximums are absolute maximum.

**DIMENSIONS** in inches [millimeters]

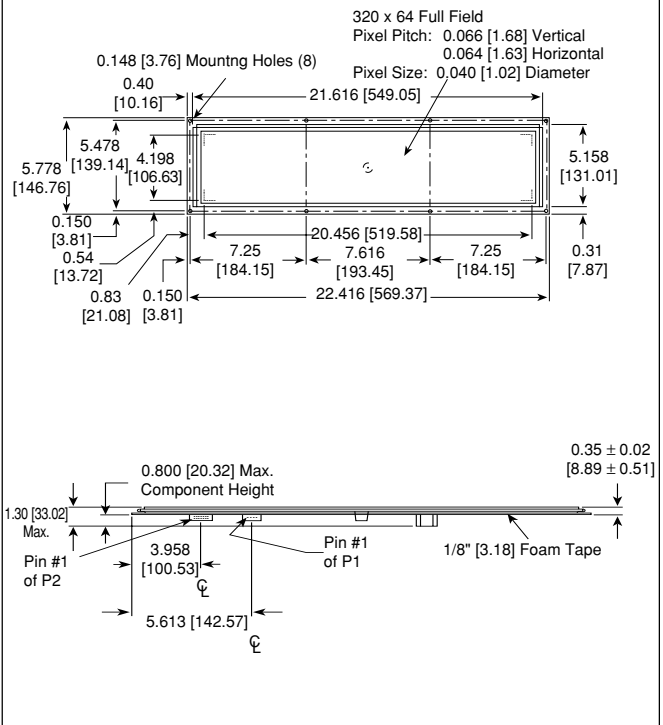

**ORDERING INFORMATION**

DESCRIPTION	PART NUMBER
Display Module with Drivers, TTL Interface and On Board DC Converter .....	APD-320G064
Data Connector Kit .....	280105-05
Power Connector Kit .....	280108-05