

Three-Way Power Divider

3 - 700 MHz

DS-328

V2.00

Features

- 0.4 dB Typical Midband Insertion Loss
- 28 dB Typical Midband Isolation
- 1.2:1 Typical Input VSWR

Guaranteed Specifications*

(From -55°C to +85°C)

Frequency Range	3-700 MHz	
Insertion Loss (Less coupling)	3-500 MHz	0.70 dB Max
	500-700 MHz	1.0 dB Max
Isolation	3-700 MHz	20 dB Min
Amplitude Balance	3-500 MHz	0.25 dB Max
	500-700 MHz	0.4 dB Max
Phase Balance	3-500 MHz	3° Max
	500-700 MHz	4° Max
VSWR (All Ports)	10-500 MHz	1.3:1 Max
	3-700 MHz	1.5:1 Max

Operating Characteristics


Impedance	50 Ohms Nominal
Maximum Power Rating or Input Power	1.0 Watt Max
Internal Load Dissipation	0.125 Watt Max
Environmental	
MIL-STD-202 screening available.	
Pin Configuration	
DS-328	IN;P11, Outputs, P2, P5, P8

*All specifications apply with 50 ohm source and load impedance.
This product contains elements protected by United States Patent
Number 3,428,920.


Ordering Information

Model No.	Package
DS-328 PIN	TO-8-2

TO-8-2

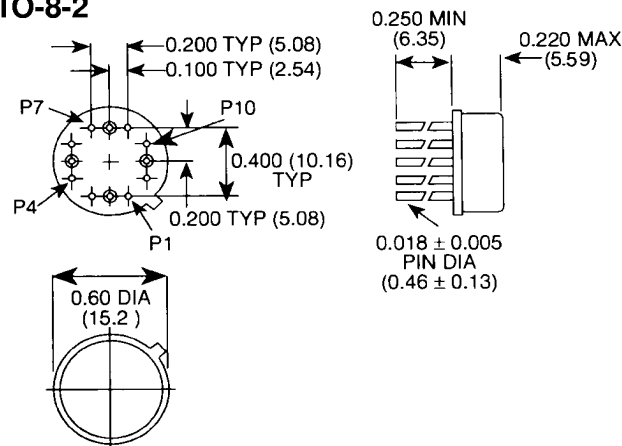

Typical Performance

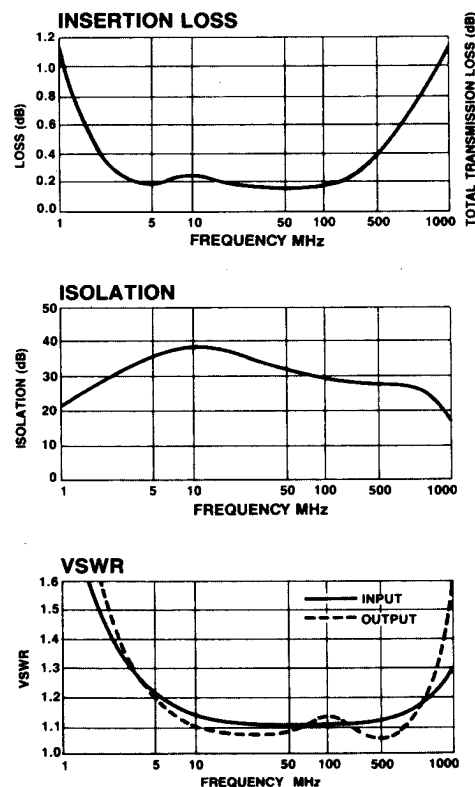

M/A-COM, Inc.

Specifications Subject to Change Without Notice.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020